



SNS COLLEGE OF ENGINEERING



Kurumbapalayam(Po), Coimbatore – 641 107

Accredited by NAAC-UGC with 'A' Grade

Approved by AICTE, Recognized by UGC & Affiliated to Anna University, Chennai


Department of Information Technology

Course Name –Internet of Things & AI

III Year / V Semester

Unit 1 – IoT INTRODUCTION AND APPLICATIONS

Topic 3- Basic Nodal Capabilities

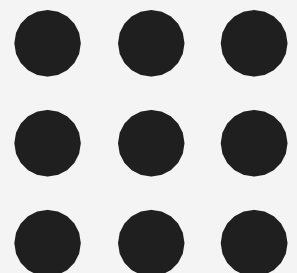



IPv6



Role of IPv6

- IPv6 with its abundant address spaces,
- globally unique object (thing) identification
- permanent unique identifier, an object ID (OID)
- unique network address (Nadr)
- IPv4 supports $2^{32} \sim 10^{10}$ NAdr location can be identified uniquely. 4,294,967,296
- IPv6 offers a much larger 2^{128} space
- the number of available unique node addressees is $2^{128} \sim 10^{39}$
- 340,282,366,920,938,463,463,374,607,431,768,211,456



IPv6




Advances of IPv6

- Scalability and expanded addressing capabilities
- IPv6 has 128-bit addresses versus 32-bit IPv4 addresses.
Example IPv4 Address : 192.168.1.1
Example IPv6 Address : 2001:0db8:3c4d:0015:0000:0000:1a2f:1a2b
- “Plug-and-play”: IPv6 includes a “plug-and-play” mechanism that facilitates the connection of equipment to the network.
- Security: IPv6 includes and requires security in its specifications such as payload encryption and authentication of the source of the communication.
- Mobility: IPv6 includes an efficient and robust mobility mechanism namely an enhanced support for mobile IP, specifically, the set of mobile IPv6



Basic Nodal Capabilities



Node or Device - have a basic protocol stack that supports as a minimum local connectivity and networking connectivity.


In addition, some higher layer application support protocols are generally needed.

IoT devices may have capability differences such as

- maximum transmission unit (MTU) differences,
- Simplified versus full-blown web protocol stack (COAP/UDP versus HTTP/TCP),
- single stack versus dual stack,
- sleep schedule,
- security protocols,
- processing and communication bandwidth.



Basic Nodal Capabilities

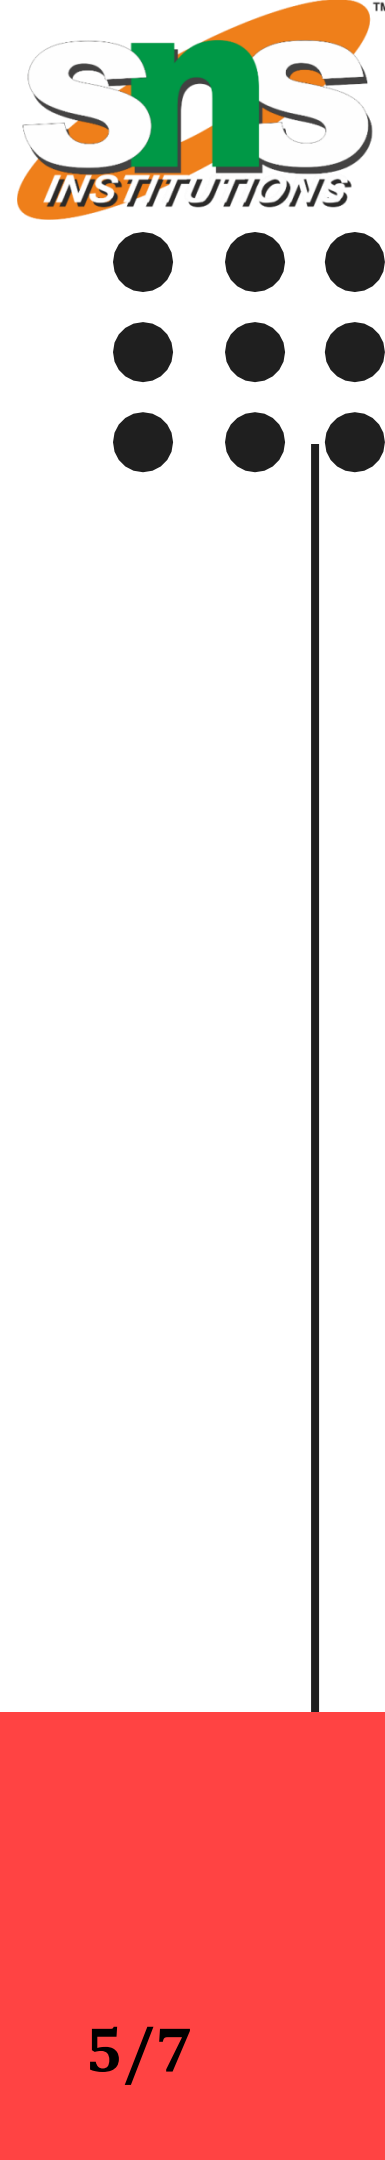

Typical requirements include the following capabilities

Retransmission

- Network recovers from packet loss or informs application
 - Recovery is immediate: on the order of RTTs, not seconds
- Network independent of MAC/PHY

Scale

- Thousands of nodes
- Multiple link speeds

Multicast

- Throughout network
- Reliable (positive Ack)

Duplicate suppression

Emergency messages

- Routed and/or queued around other traffic
- Other traffic slushed as delivered



Basic Nodal Capabilities



Routine traffic delivered in sequence

Exchange of multisegment records

Separate timers by peer/message

Network and application versioning

Polling of nodes

Simple publish/subscribe parsers

- Sequential
- Independent of responses

Security

Paradigm supports peer-to-peer

- Not everything is client/server

- Strong encryption
- Mutual authentication
- Protection against record/playback attacks
- Suite B ciphers

Capabilities

- Discover nodes
- Discover node capabilities
- Deliver multisegment records (files)



THANK YOU