

# **SNS COLLEGE OF ENGINEERING**

**Coimbatore**

**An Autonomous Institution**

Accredited by NBA – AICTE and Accredited by NAAC – UGC  
with 'A' Grade

Approved by AICTE, New Delhi & Affiliated to Anna  
University, Chennai

## **DEPARTMENT OF ELECTRONICS & ELECTRONICS ENGINEERING**

### **ELECTRICAL ENGINEERING & INSTRUMENTATION**

II YEAR/ III SEMESTER

#### **UNIT 2 – TRANSFORMERS**

#### **TOPIC 3 – EMF EQUATION OF TRANSFORMER**

# OVERVIEW

- BASIC RECAP QUESTION
- FARADAYS LAW
- PRINCIPLE OF OPERATION
- EMF EQUATION

## BASICS RECAP

A current of 1A is drawn by a filament of an electric bulb for 10 minutes. Find the number of electrons that flows through the circuit.

**ANS:** The number of electron that flows through the circuit is 600

### Step-by-step explanation:

we are given

current = 1 A

time = 10 min = 10 \*60 sec = 600 sec

we have to find coulomb of charge so let it as x and formula for this is

$$I = \frac{Q}{T}$$

*now put values*

$$1 \text{ A} = \frac{x}{600 \text{ sec}}$$

$$1\text{A} * 600 \text{ sec} = x \text{ coulomb}$$


600 coulomb ( or ampere/ sec ) in this circuit 600 electrons flows for 10 min in 1 Ampere current .

## KEY POINTS



- FARADAYS LAW
- STATIC DEVICE
- MAGNETIC FLUX
- MUTUAL INDUCTANCE
- CORE
- LAMINATIONS
- RELUCTANCE

## PRINCIPLE OF OPERATION-FARADAY'S LAW

*Any Change in the magnetic field of a coil of wire will cause an EMF to be induced in the coil. This EMF induced is called induced EMF and if conductor circuit is closed, the current will also circulate through the circuit and this current is called induced current*

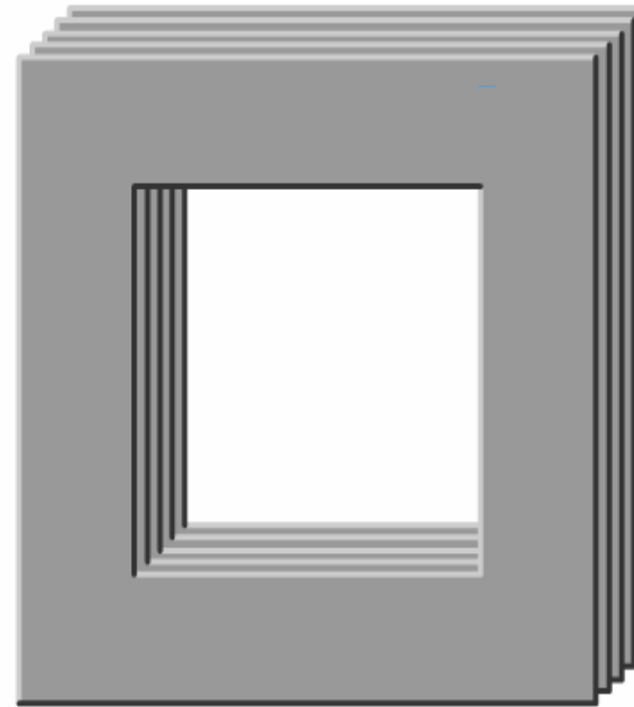


# MAGNETIC FLUX

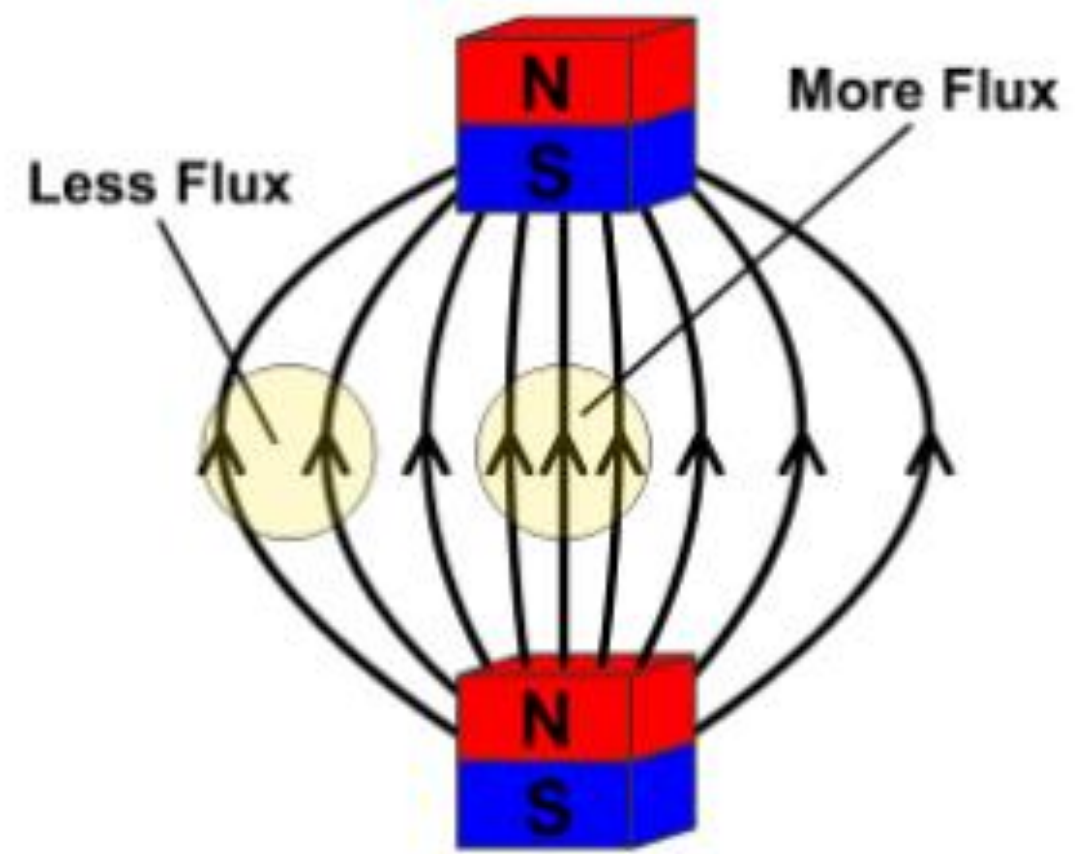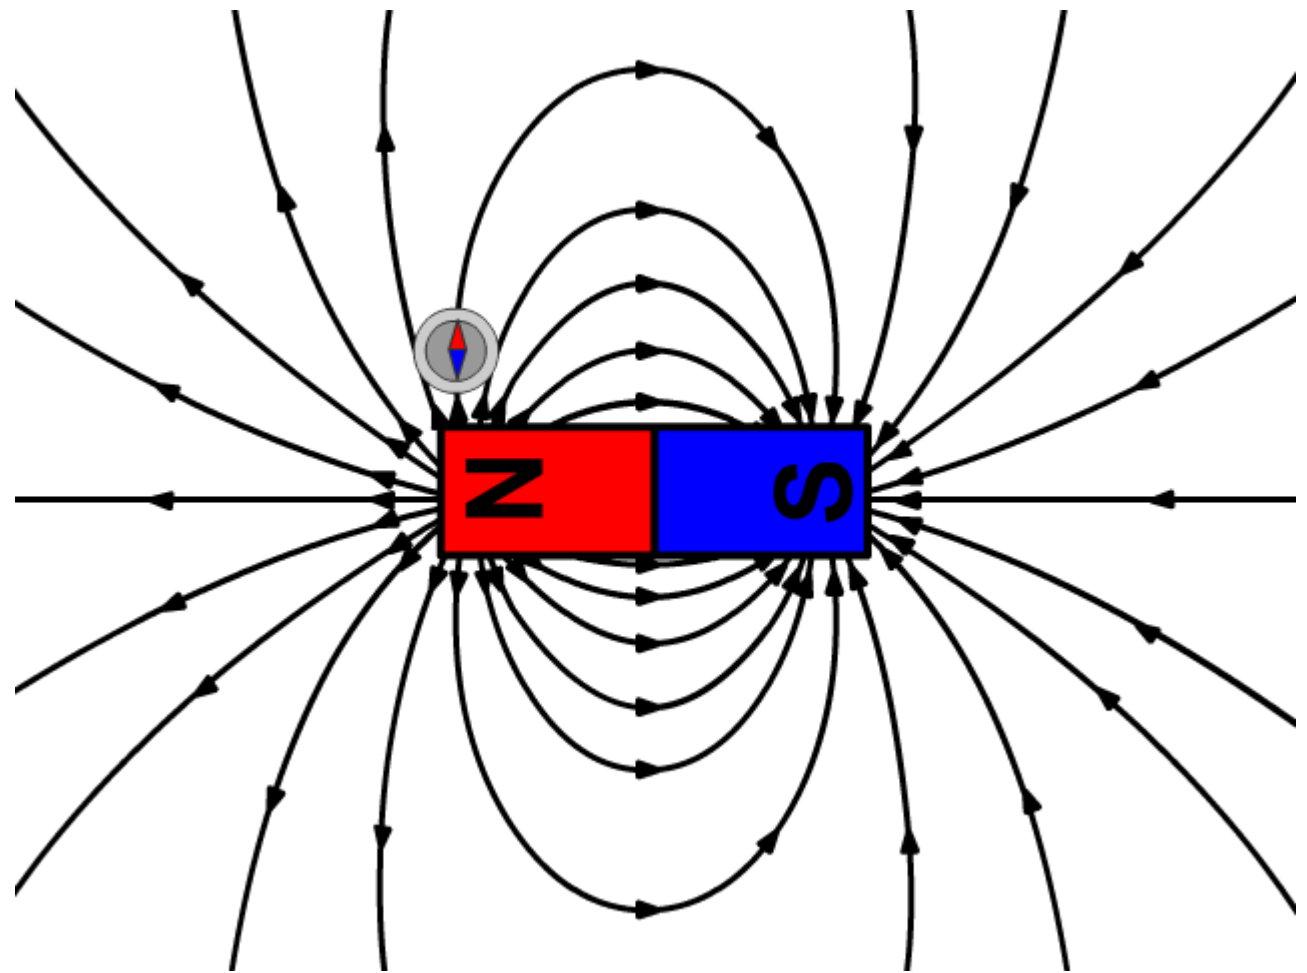

**Magnetic Flux** is a measure of the number of **magnetic field lines** passing through a given point.




# MUTUAL INDUCTANCE

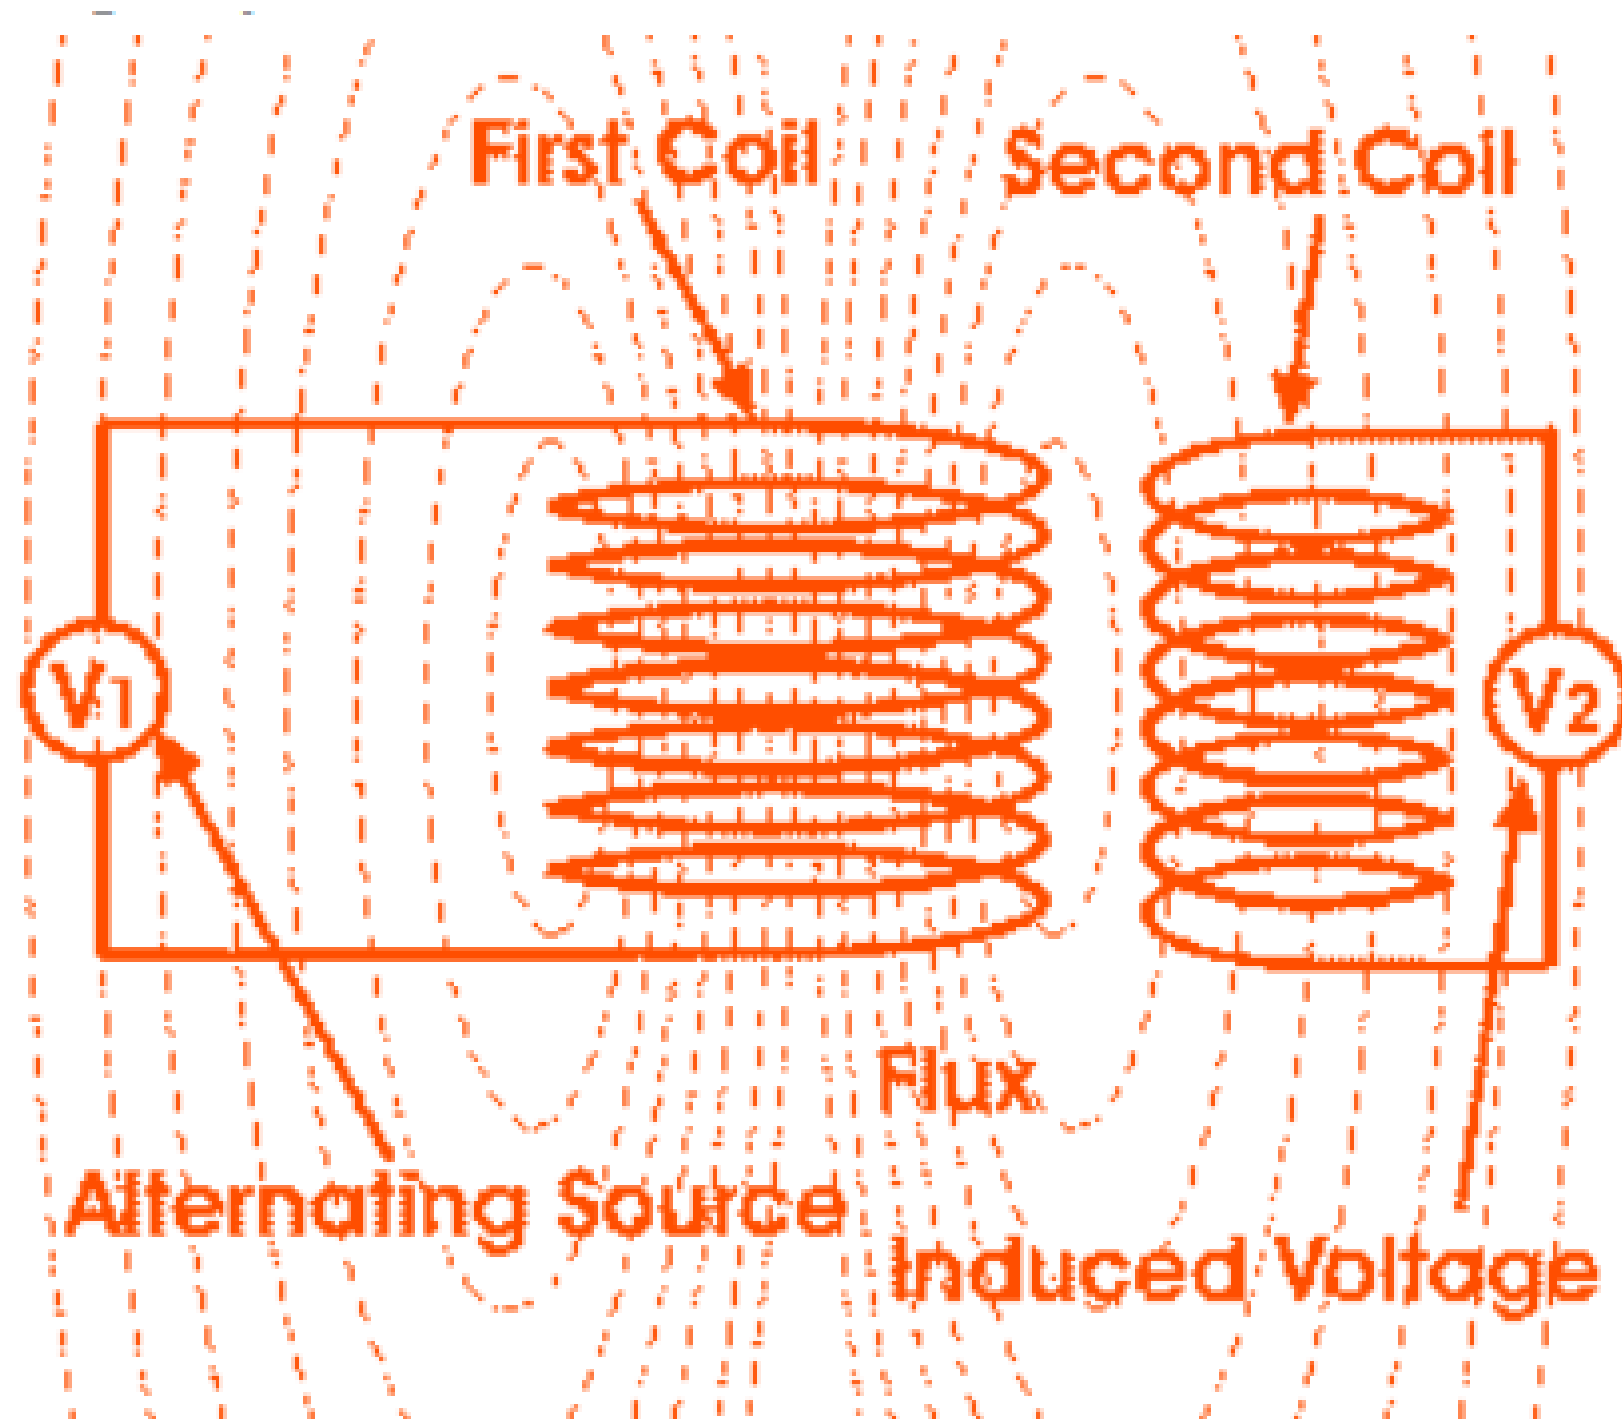


**Mutual Inductance** is the property of two coils, by virtue of which, either of the two coils opposes any change in the strength of the current flowing through the other coil, by inducing an opposing emf in itself.

# LAMINATED CORE

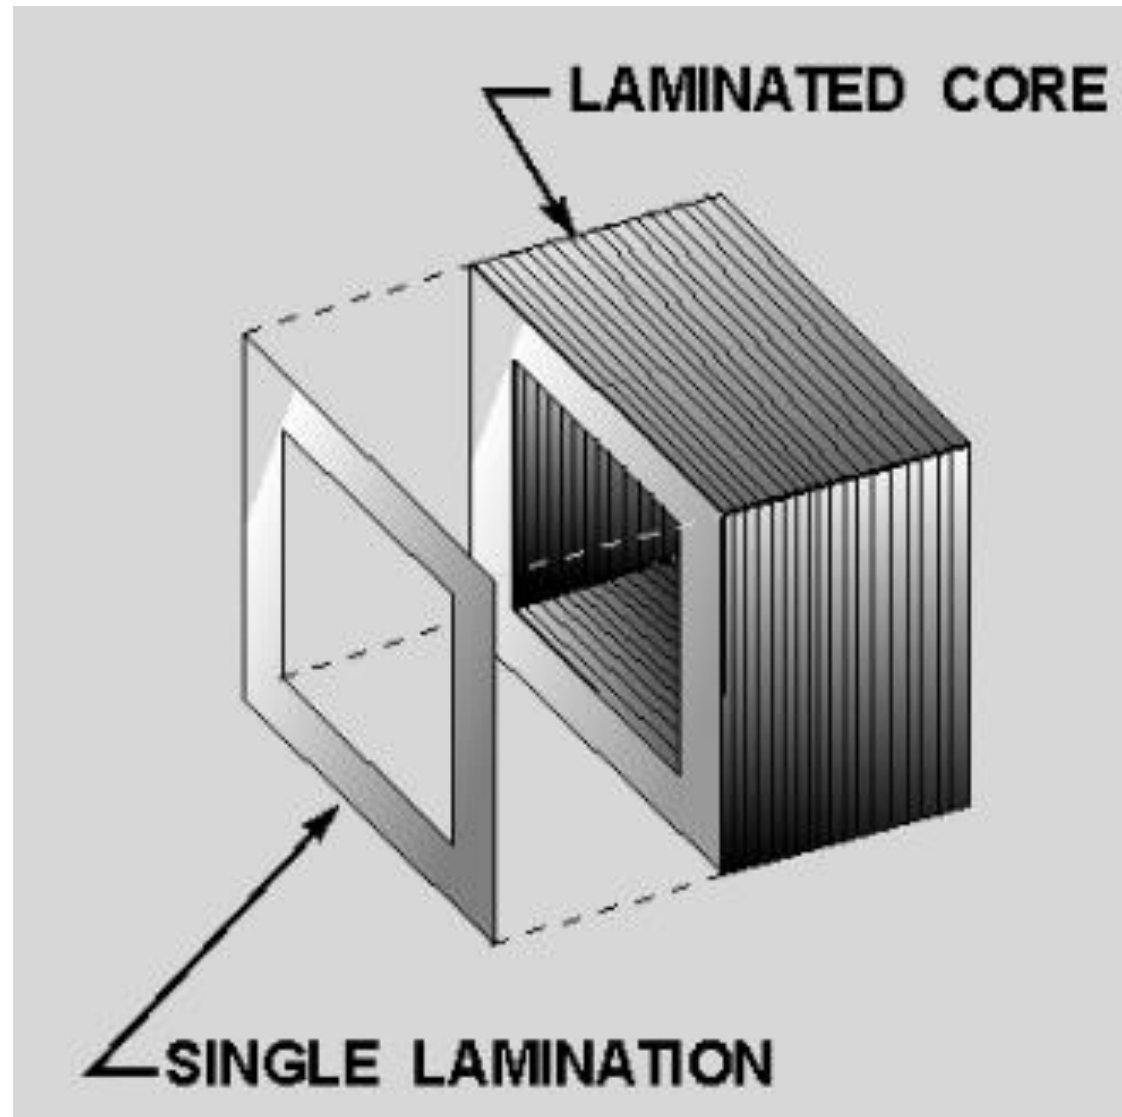

Shell-type Laminations


Core-type Laminations

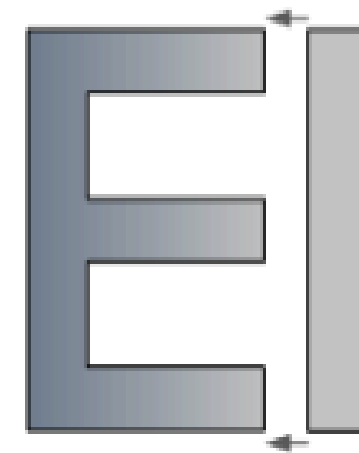


"E-I" Laminations




"E-E" Laminations

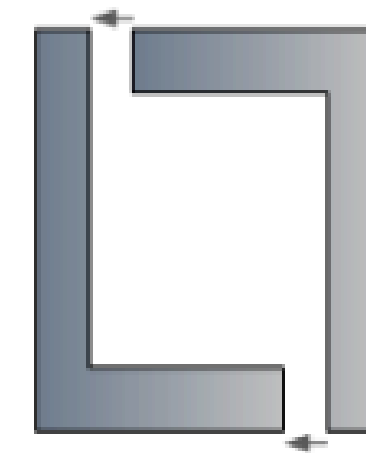

"L" Laminations

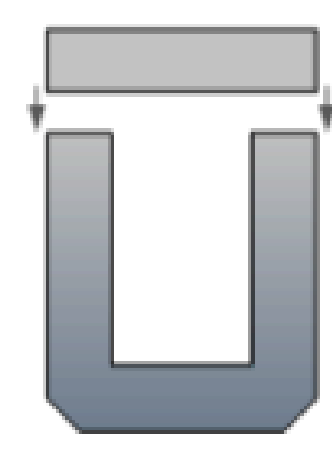

"U-I" Laminations


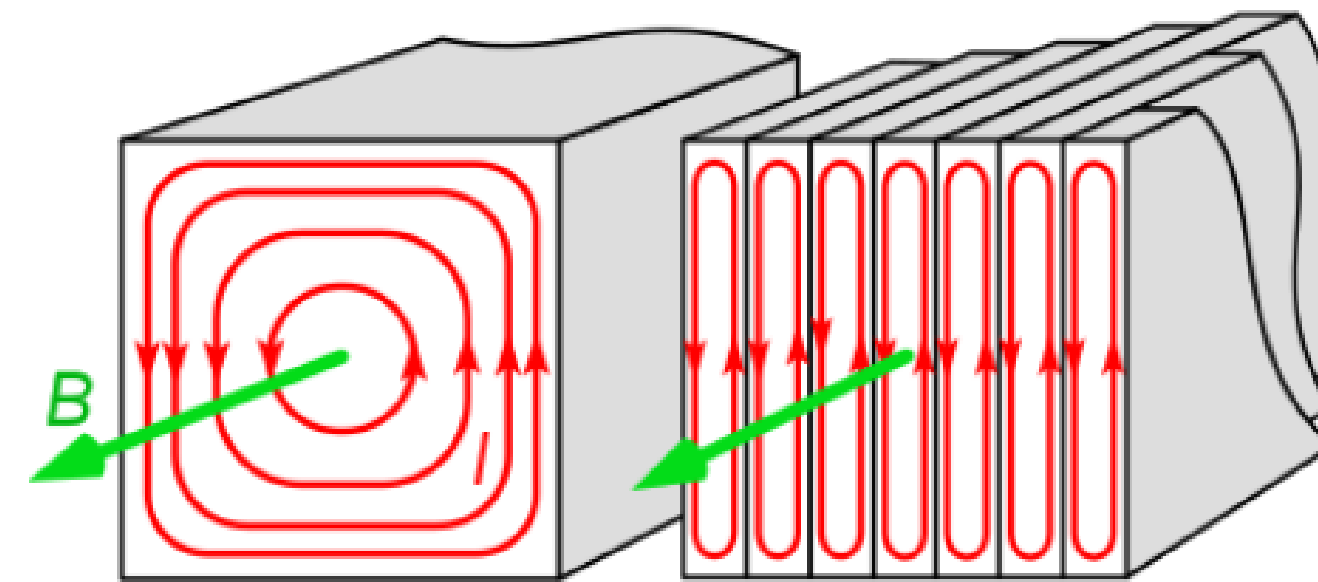


- Laminated sheets of steel are used to reduce eddy current loss. ( $I^2R$  Loss)
- Breaking a large core into narrow laminations reduces the power losses drastically



# RELUCTANCE

## Analogy between Electric circuit and magnetic circuit

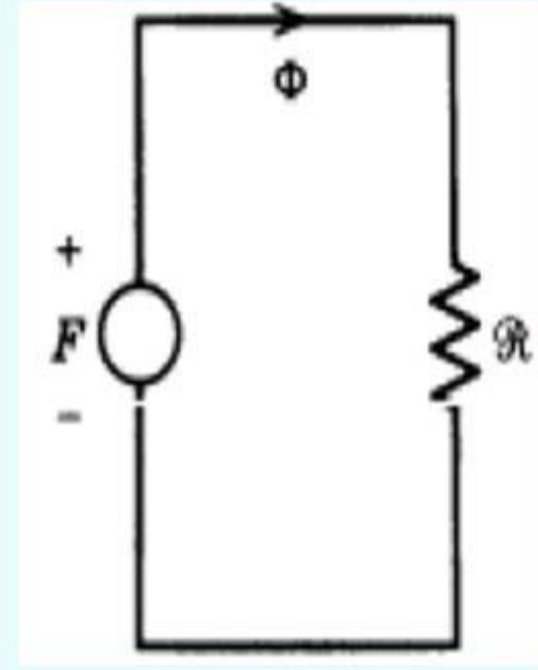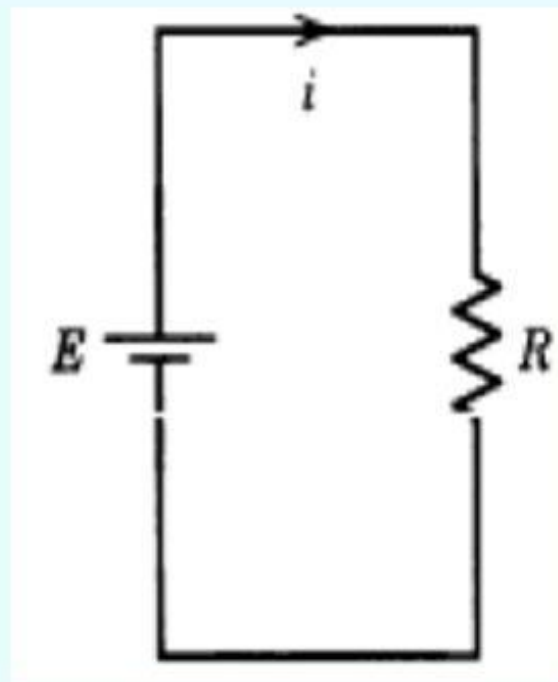

<b>Driving Force</b>	Emf (E)	Mmf (F)
<b>Produce</b>	Current i	Flux $\Phi$
<b>Limited by</b>	Resistance R	Reluctance

# EMF Equation of a Transformer

- $N_1$  = Number of Turns in Primary Winding
- $N_2$  = Number of Turns in Secondary Winding
- $\Phi_m$  = Maximum Flux in the Core
- $f$  = Frequency of AC Input

Average rate of change of flux =  $\frac{\Phi_m}{1/4 f} = 4 f \Phi_m$  Wb/s or volt

Average E.M.F / turn =  $4 f \Phi_m$  volt

If flux  $\Phi_m$  varies sinusoidally,


Form Factor =  $\frac{\text{R.M.S. value}}{\text{Average value}} = 1.11$

$\therefore$  R.M.S. value of E.M.F / turn =  $4.44 f \Phi_m$  volt

Now, R.M.S. value of the E.M.F. in the whole of primary winding

= ( induced E.M.F/turns) x No. of primary turns

$E_1 = 4.44 f N_1 \Phi_m$

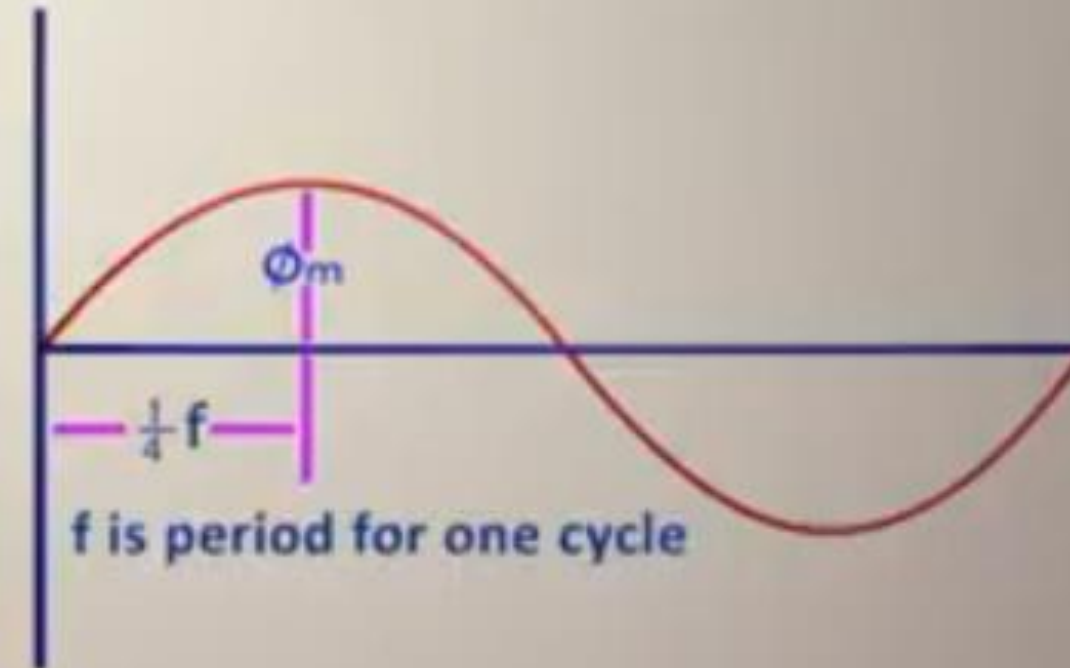

## EMF Equation of a Transformer

$N_1$  = Number of Turns in Primary Winding

$N_2$  = Number of Turns in Secondary Winding

$\Phi_m$  = Maximum Flux in the Core

$f$  = Frequency of AC Input

$$\text{Average rate of change of flux} = \frac{\Phi_m}{1/4 f} = 4 f \Phi_m \text{ Wb/s or volt}$$

$$\text{Average E.M.F / turn} = 4 f \Phi_m \text{ volt}$$


If flux  $\Phi_m$  varies sinusoidally,

$$\text{Form Factor} = \frac{\text{R.M.S. value}}{\text{Average value}} = 1.11$$

$$\therefore \text{R.M.S. value of E.M.F / turn} = 4.44 f \Phi_m \text{ volt}$$

$$E_1 = 4.44 f N_1 \Phi_m$$

$$E_2 = 4.44 f N_2 \Phi_m$$

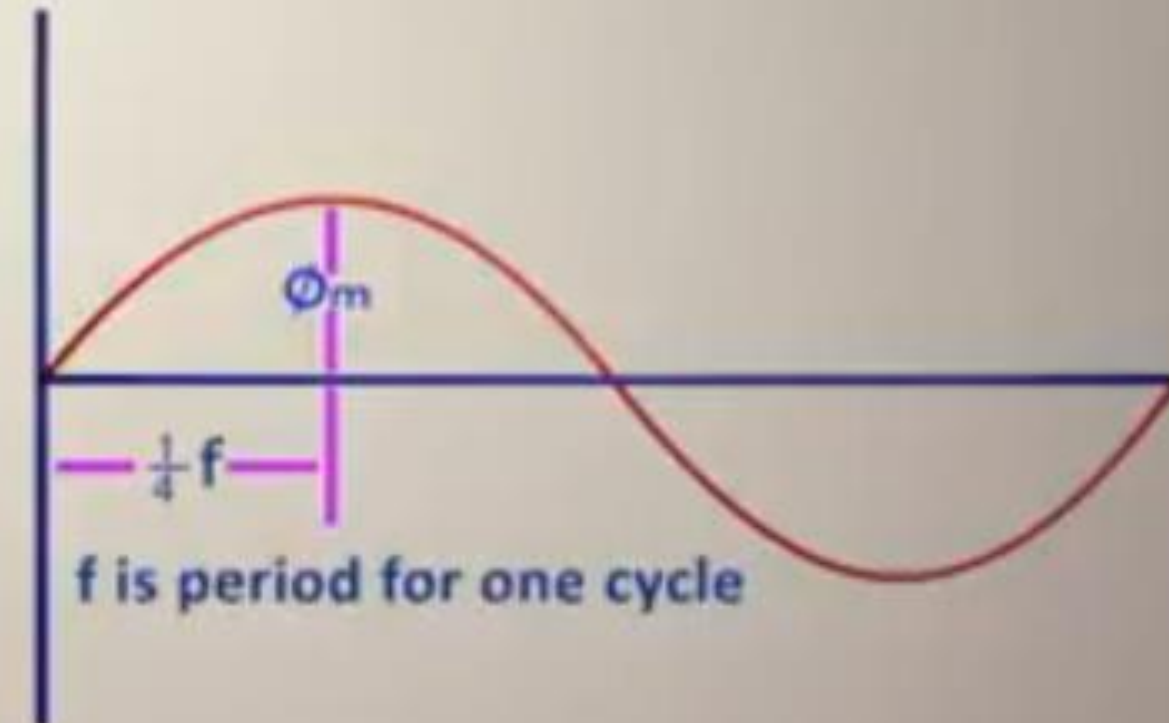

# EMF Equation of a Transformer

- $N_1$  = Number of Turns in Primary Winding
- $N_2$  = Number of Turns in Secondary Winding
- $\Phi_m$  = Maximum Flux in the Core
- $f$  = Frequency of AC Input

Average rate of change of flux =  $\frac{\Phi_m}{1/4 f} = 4 f \Phi_m$  Wb/s or volt

Average E.M.F / turn =  $4 f \Phi_m$  volt

If flux  $\Phi_m$  varies sinusoidally,


Form Factor =  $\frac{\text{R.M.S. value}}{\text{Average value}} = 1.11$

$\therefore$  R.M.S. value of E.M.F / turn =  $4.44 f \Phi_m$  volt

$$E_1 = 4.44 f N_1 \Phi_m$$

$$E_2 = 4.44 f N_2 \Phi_m$$

$$\frac{E_2}{E_1} = \frac{N_2}{N_1}$$

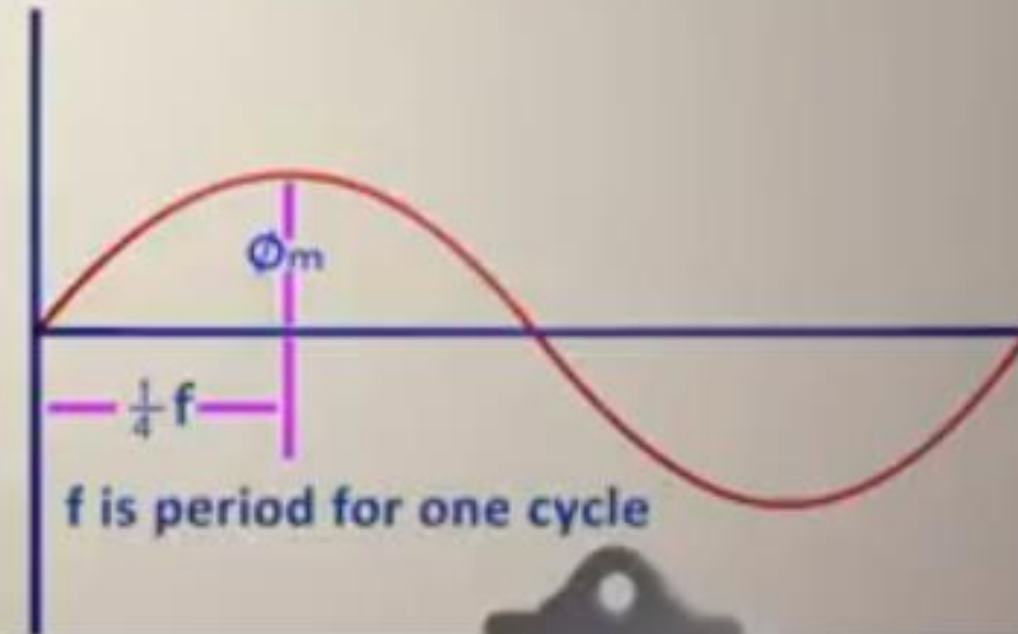

## Voltage Transformer Ratio (K)

$$\frac{E_2}{E_1} = \frac{N_2}{N_1}$$

If  $K > 1$

'Step-up' transformer

### Voltage Transformer Ratio (K)

$$\frac{E_2}{E_1} = \frac{N_2}{N_1}$$

If  $K > 1$        $N_2 > N_1$

'Step-up' transformer

### Voltage Transformer Ratio (K)

$$\frac{E_2}{E_1} = \frac{N_2}{N_1}$$

If  $K < 1$        $N_2 < N_1$

'Step-down' transformer

# ASSESSMENT

What is Transformer?

Why Transformer is called Static Device?

Why the core is laminated?

What is self inductance and mutual inductance?

Which power source is used for providing alternating magnetic flux?

Which power source is used for providing Constant magnetic flux?

The  
way