



# Electromagnetics Wave Equation



## Wave equation and their solution:

we can write the Maxwell's equations in the differential form as

$$\nabla \times \vec{H} = \vec{J} + \frac{\partial \vec{D}}{\partial t}$$

$$\nabla \times \vec{E} = -\frac{\partial \vec{B}}{\partial t}$$

$$\nabla \cdot \vec{D} = \rho$$

$$\nabla \cdot \vec{B} = 0$$

Let us consider a source free uniform medium having dielectric constant  $\epsilon$ , magnetic permeability  $\mu$  and conductivity  $\sigma$ . The above set of equations can be written as

$$\nabla \times \vec{H} = \sigma \vec{E} + \epsilon \frac{\partial \vec{E}}{\partial t}$$

$$\nabla \times \vec{E} = -\mu \frac{\partial \vec{H}}{\partial t}$$

$$\nabla \cdot \vec{E} = 0$$

$$\nabla \cdot \vec{H} = 0$$

Using the vector identity ,

$$\nabla \times \nabla \times \vec{A} = \nabla (\nabla \cdot \vec{A}) - \nabla^2 \vec{A}$$

We can write from

$$\begin{aligned}\nabla \times \nabla \times \vec{E} &= \nabla \cdot (\nabla \cdot \vec{E}) - \nabla^2 \vec{E} \\ &= -\nabla \times \left( \mu \frac{\partial \vec{H}}{\partial t} \right)\end{aligned}$$

Or

$$\nabla \cdot (\nabla \cdot \vec{E}) - \nabla^2 \vec{E} = -\mu \frac{\partial}{\partial t} \left( \sigma \vec{E} + \epsilon \frac{\partial \vec{E}}{\partial t} \right)$$

Substituting  $\nabla \times \vec{H}$

$$\nabla \cdot (\nabla \cdot \vec{E}) - \nabla^2 \vec{E} = -\mu \frac{\partial}{\partial t} (\nabla \times \vec{H})$$

But in source free medium  $\nabla \cdot \vec{E} = 0$

$$\nabla^2 \vec{E} = \mu \sigma \frac{\partial \vec{E}}{\partial t} + \mu \epsilon \frac{\partial^2 \vec{E}}{\partial t^2}$$

In the same manner for equation

$$\begin{aligned}\nabla \times \nabla \times \vec{H} &= \nabla \cdot (\nabla \cdot \vec{H}) - \nabla^2 \vec{H} \\ &= \sigma (\nabla \times \vec{E}) + \epsilon \frac{\partial}{\partial t} (\nabla \times \vec{E}) \\ &= \sigma \left( -\mu \frac{\partial \vec{H}}{\partial t} \right) + \epsilon \frac{\partial}{\partial t} \left( -\mu \frac{\partial \vec{H}}{\partial t} \right)\end{aligned}$$

Since  $\nabla \cdot \vec{H} = 0$  from eqn 5.29(d), we can write  $\nabla^2 \vec{H} = \mu \sigma \left( \frac{\partial \vec{H}}{\partial t} \right) + \mu \epsilon \left( \frac{\partial^2 \vec{H}}{\partial t^2} \right)$

These two equations

$$\nabla^2 \vec{E} = \mu \sigma \frac{\partial \vec{E}}{\partial t} + \mu \epsilon \frac{\partial^2 \vec{E}}{\partial t^2}$$

$$\nabla^2 \vec{H} = \mu \sigma \left( \frac{\partial \vec{H}}{\partial t} \right) + \mu \epsilon \left( \frac{\partial^2 \vec{H}}{\partial t^2} \right)$$

are known as wave equations.

It may be noted that the field components are functions of both space and time. Forexample, if we consider a Cartesian co ordinate system,  $\vec{E}$  and  $\vec{H}$

essentially represents  $\vec{E}(x, y, z, t)$  and  $\vec{H}(x, y, z, t)$ . For simplicity, we consider

propagation in free space , ,  $\sigma = 0$   $\mu = \mu_0$

i.e. reduces to and  $\epsilon = \epsilon_0$ .

The wave eqn

$$\nabla^2 \vec{E} = \mu_0 \epsilon_0 \left( \frac{\partial^2 \vec{E}}{\partial t^2} \right) \quad (5.32(a))$$

$$\nabla^2 \vec{H} = \mu_0 \epsilon_0 \left( \frac{\partial^2 \vec{H}}{\partial t^2} \right) \quad (5.32(b))$$

Further simplifications can be made if we consider in Cartesian co ordinatesystem a special case where

$\vec{E}$  and  $\vec{H}$  are considered to be independent in two dimensions, say  $\vec{E}$  and  $\vec{H}$  are assumed to be independent of y and z.

Such waves are called plane waves. From eqn (5.32 (a)) we can write

$$\frac{\partial^2 \vec{E}}{\partial x^2} = \epsilon_0 \mu_0 \left( \frac{\partial^2 \vec{E}}{\partial t^2} \right)$$

The vector wave equation is equivalent to the three scalar equations

$$\frac{\partial^2 \vec{E}_x}{\partial x^2} = \epsilon_0 \mu_0 \left( \frac{\partial^2 \vec{E}_x}{\partial t^2} \right) \quad (5.33(a))$$

$$\frac{\partial^2 \vec{E}_y}{\partial x^2} = \epsilon_0 \mu_0 \left( \frac{\partial^2 \vec{E}_y}{\partial t^2} \right) \quad (5.33(b))$$

$$\frac{\partial^2 \vec{E}_z}{\partial x^2} = \epsilon_0 \mu_0 \left( \frac{\partial^2 \vec{E}_z}{\partial t^2} \right) \quad (5.33(c))$$

Since we have  $\nabla \cdot \vec{E} = 0$ ,

$$\therefore \frac{\partial \vec{E}_x}{\partial x} + \frac{\partial \vec{E}_y}{\partial y} + \frac{\partial \vec{E}_z}{\partial z} = 0 \quad (5.34)$$

As we have assumed that the field components are independent of y and z eqn (5.34) reduces to

$$\frac{\partial E_x}{\partial x} = 0$$

i.e. there is no variation of  $E_x$  in the x direction.

Further, from 5.33(a), we find that  $\frac{\partial E_x}{\partial x} = 0$  implies  $\frac{\partial^2 E_x}{\partial x^2} = 0$  which requires any three of the conditions to be satisfied: (i)  $E_x = 0$ , (ii)  $E_x = \text{constant}$ , (iii)  $E_x$  increasing uniformly with time.

A field component satisfying either of the last two conditions (i.e (ii) and (iii)) is not a part of a plane wave motion and hence  $E_x$  is taken to be equal to zero. Therefore, a uniform plane wave propagating in x direction does not have a field component ( $E$  or  $H$ ) acting along x.

Without loss of generality let us now consider a plane wave having  $E_y$  component only (Identical results can be obtained for  $E_z$  component) .

The equation involving such wave propagation is given by

$$\frac{\partial^2 \vec{E}_y}{\partial x^2} = \epsilon_0 \mu_0 \left( \frac{\partial^2 \vec{E}_y}{\partial t^2} \right) \quad (5.36)$$

The above equation has a solution of the form


$$E_y = f_1(x - v_0 t) + f_2(x + v_0 t) \quad (5.37)$$

where 
$$v_0 = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$$

Thus equation (5.37) satisfies wave eqn (5.36) can be verified by substitution.  $f_1(x - v_0 t)$  corresponds to the wave traveling in the + x direction while  $f_2(x + v_0 t)$  corresponds to a wave traveling in the -x direction. The general solution of the wave eqn thus consists of two waves, one traveling away from the source and other traveling back towards the source. In the absence of any reflection, the second form of the eqn (5.37) is zero and the solution can be written as

$$E_y = f_1(x - v_0 t)$$

Such a wave motion is graphically shown in fig at two instances of time  $t_1$  and  $t_2$ .

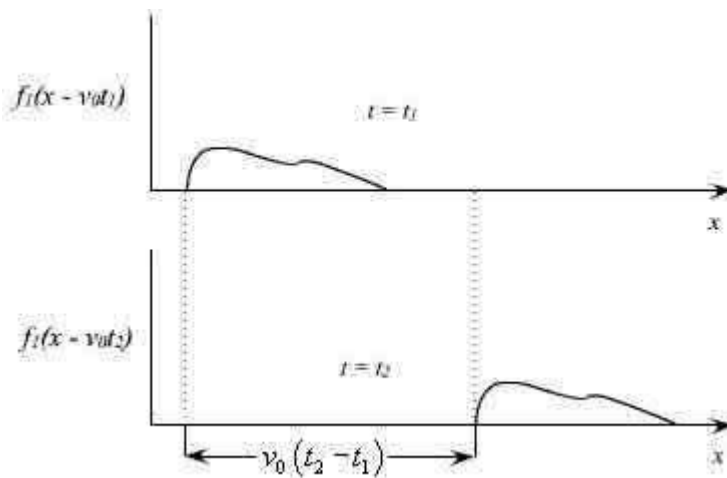

**Traveling wave in the + x direction**

Let us now consider the relationship between E and H components for the Forward travelling wave.

Since  $\vec{E} = \hat{a}_y E_y = \hat{a}_y f_1(x - v_0 t)$  and there is no variation along y and z.

$$\nabla \times \vec{E} = \hat{a}_z \frac{\partial E_y}{\partial x}$$

Since only z component of  $\nabla \times \vec{E}$  exists, from (5.29(b))

$$\frac{\partial E_y}{\partial x} = -\mu_0 \frac{\partial H_z}{\partial t} \quad (5.39)$$

and from (5.29(a)) with  $\sigma = 0$ , only  $H_z$  component of magnetic field being present

$$\nabla \times \vec{H} = -\hat{a}_y \frac{\partial H_z}{\partial x}$$

$$\therefore -\frac{\partial H_z}{\partial x} = \epsilon_0 \frac{\partial E_y}{\partial t} \quad (5.40)$$

Substituting  $E_y$  from (5.38)

$$\frac{\partial H_z}{\partial x} = -\epsilon_0 \frac{\partial E_y}{\partial t} = -\epsilon_0 v_0 f_1'(x - v_0 t)$$

$$\therefore \frac{\partial H_z}{\partial x} = -\epsilon_0 \frac{1}{\sqrt{\mu_0 \epsilon_0}} f_1'(x - v_0 t)$$

$$\therefore H_z = \sqrt{\frac{\epsilon_0}{\mu_0}} \int f_1'(x - v_0 t) dx + c$$

$$= \sqrt{\frac{\epsilon_0}{\mu_0}} \int \frac{\partial}{\partial x} f_1 dx + c$$

$$= \sqrt{\frac{\epsilon_0}{\mu_0}} f_1 + c$$

$$H_z = \sqrt{\frac{\epsilon_0}{\mu_0}} E_y + c$$

The constant of integration means that a field independent of x may also exist. However, this field will not be a part of the wave motion.

Hence

(5.41)

which relates the  $E$  and  $H$  components of the traveling wave.

$$Z_0 = \frac{E_y}{H_x} = \sqrt{\frac{\mu_0}{\epsilon_0}} \cong 120\pi \text{ or } 377\Omega$$

$Z_0 = \sqrt{\frac{\mu_0}{\epsilon_0}}$  is called the characteristic or intrinsic impedance of the free space

