



# **SNS COLLEGE OF TECHNOLOGY**

**Coimbatore-35**  
**An Autonomous Institution**

Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A++’ Grade  
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



## **DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING**

### **19ECB211 – MICROCONTROLLER PROGRAMMING & INTERFACING**

II YEAR IV SEM

**UNIT I – PIC MICROCONTROLLER : HISTORY , FEATURES & ARCHITECTURE**

**TOPIC 6 – PIC Status Register**




## PIC Status Register

- The STATUS register is of most importance to programming the PIC, it contains the arithmetic status of the ALU (Arithmetic Logic Unit), the RESET status and the bank select bit for data memory.
- As with any register, the STATUS register can be the destination for any instruction



## PIC Status Register

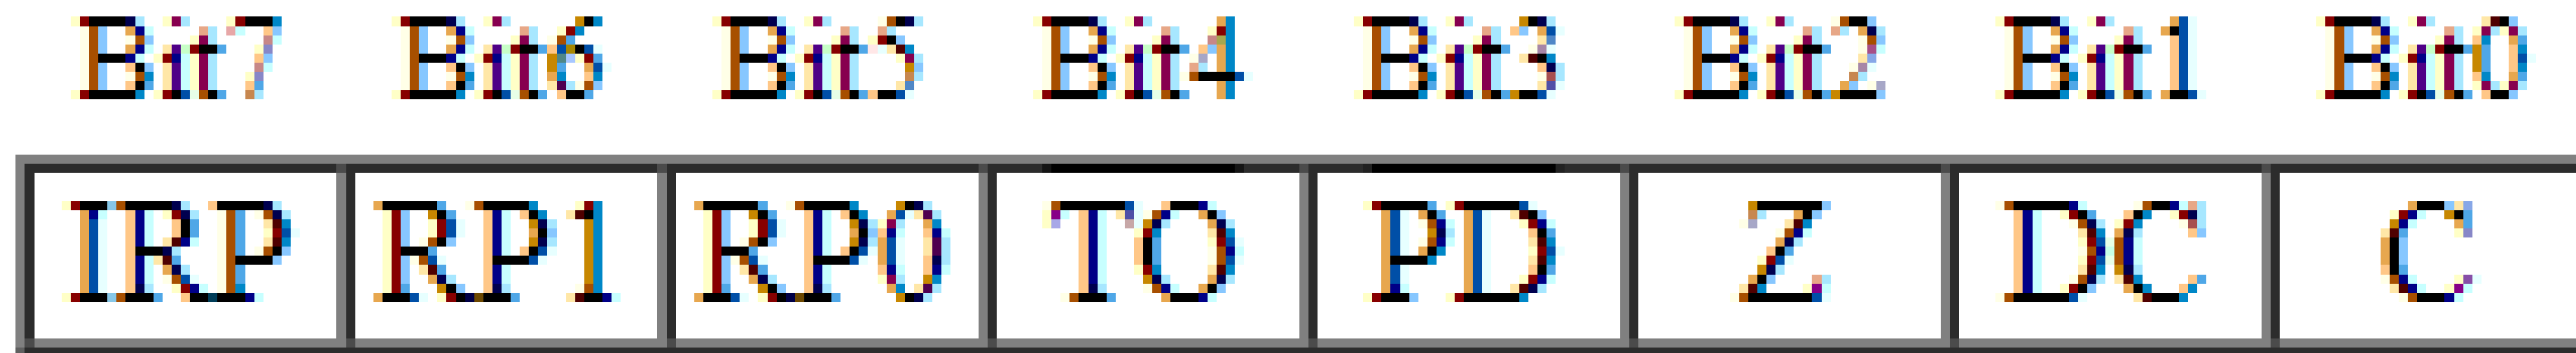

- If the STATUS register is the destination for an instruction that affects the Z, DC or C bits, then the write to these three bits is disabled.
- These bits are set or cleared according to device logic.



## PIC Status Register

- Furthermore, the TO and PD bits are not writable.
- Therefore, the result of an instruction with the STATUS register as destination may be different than intended.
- For example, CLRF STATUS will clear the upper-three bits and set the Z bit. This leaves the STATUS register as 000u u1uu (where u = unchanged).




## PIC Status Register

- The first three bits (STATUS<0> to STATUS<2>) are the carry (C), digit carry (DC) and zero (Z) flags of the ALU respectively.
- The values of these bits change depending on the results of arithmetic or logical operations performed during program execution.



## PIC Status Register

➤ Bits 3 and 4 are the power down PD and watchdog timer timeout TO bits respectively and bits 5 and 6 (RP0 and RP1) are the bank selection bits.

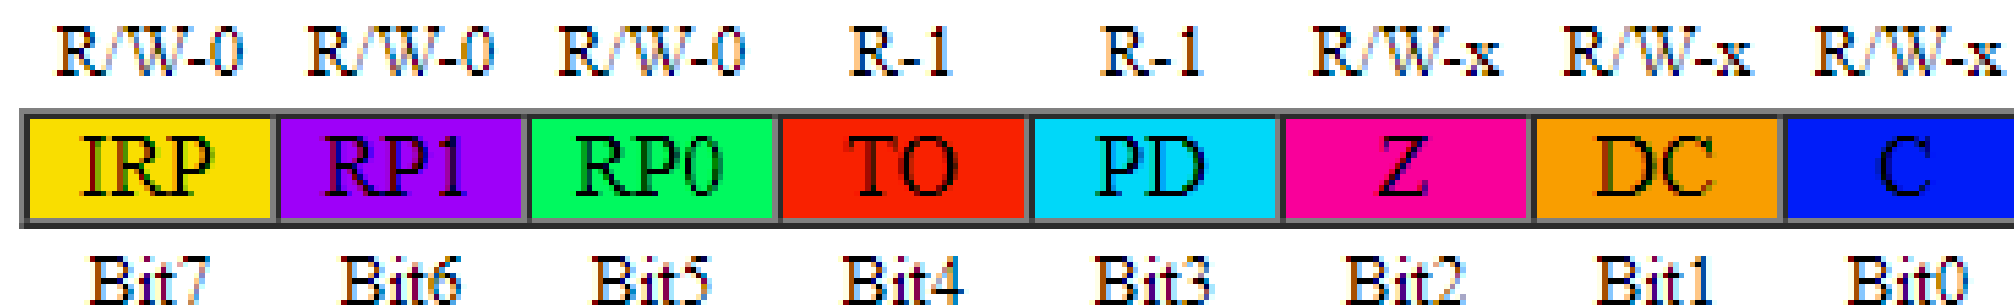

R = Readable bit

W = Writable bit

U = Unimplemented bit, read as '0'

-n = Value at POR reset



# PIC Status Register



## **bit 7:**

IRP: Register Bank Select bit (used for indirect addressing)

0 = Bank 0, 1 (00h - FFh)

1 = Bank 2, 3 (100h - 1FFh)

The IRP bit is not used by the PIC16F8X.

## **bit 6-5:**

RP1:RP0: Register Bank Select bits (used for direct addressing)

00 = Bank 0 (00h - 7Fh)

01 = Bank 1 (80h - FFh)

10 = Bank 2 (100h - 17Fh)

11 = Bank 3 (180h - 1FFh)

Each bank is 128 bytes.





# PIC Status Register



## **bit 4:**

TO: Time-out bit

1 = After power-up, CLRWDT instruction, or SLEEP instruction

0 = A WDT time-out occurred

## **bit 3:**

PD: Power-down bit

1 = After power-up or by the CLRWDT instruction

0 = By execution of the SLEEP instruction

## **bit 2:**

Z: Zero bit

1 = The result of an arithmetic or logic operation is zero

0 = The result of an arithmetic or logic operation is not zero bit





# PIC Status Register



## **bit 1:**

DC: Digit carry/borrow

1 = A carry-out from the 4th low order bit of the result occurred

0 = No carry-out from the 4th low order bit of the result

bit (for ADDWF and ADDLW instructions)

## **bit 0:**

C: Carry/borrow

1 = A carry-out from the most significant bit of the result occurred

0 = No carry-out from the most significant bit of the result occurred

.



# References



<https://www.embedded.com/the-evolution-of-embedded-devices-addressing-complex-design-challenges/>

[https://en.wikipedia.org/wiki/Embedded\\_system](https://en.wikipedia.org/wiki/Embedded_system)

<https://www.electronicsspecifier.com/products/design-automation/embedded-systems-the-evolution-of-embedded-system-design>

Mazidi M. A., McKinlay R. D., Causey D. "PIC Microcontroller And Embedded Systems" Pearson Education International, 2008(Unit I,II,III, IV & V)

*Thank You*