





Problem 13: Determine the support reactions of the beam show in figure.

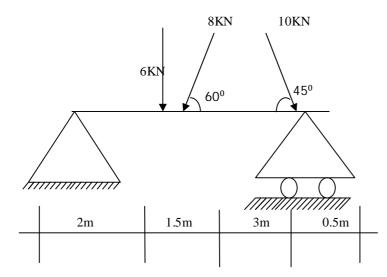

Solution:

First of all the inclined forces are to be resolved into two components.

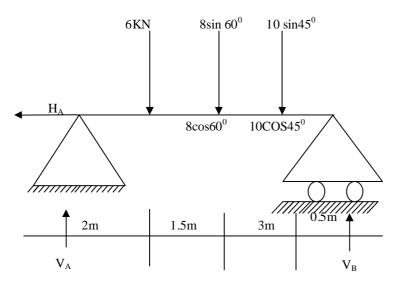

Applying $\Sigma H = 0(\rightarrow +)$

 $10\cos 45^{\circ} - 8\cos 60^{\circ} - H_A = 0$

$$H_A = 3.07 \ KN$$

 H_A is positive, hence direction of H_A assumed is correct (\leftarrow) Applying $\sum V = O(\uparrow +)$





$$V_A + V_B - 6 - 8\sin 60 - 10\sin 45 = 0$$

$$V_A + V_B = 20 \ KN \longrightarrow (1)$$

Applying $\sum m_A = O(\sim +)$

 $(H_A \times 0) + (V_A \times 0) + (6 \times 2) + (8 \sin 60 \times 3.5) + (10 \sin 45 \times 6.5) - (V_B \times 7) = 0$ $V_B \times 7 = 8.22$ $V_B = 11.74 \text{ KN}$ Sub $V_B = 11.74 \text{ KN}$ in (1) $V_A + V_B = 20$

$$V_A + 11.74 = 20 KN$$


 $V_A = 8.26 KN$

Both V_A and V_B are positive, Hence assumed directions are correct. Both are acting upwards.

Results:

$$H_A = 3.07 \ KN(\leftarrow)$$
$$V_A = 8.26 \ KN(\uparrow)$$
$$V_B = 11.74 \ KN(\uparrow)$$

Problem 14: A beam AB of spam 10m is loaded as shown in fig Determine the recations at A and B.

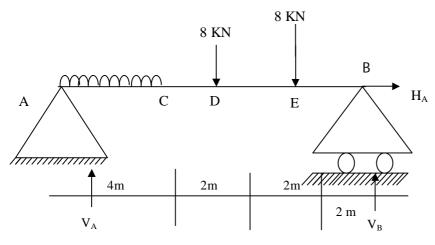

Solution:

For u.d.l total load is (3*4)=12 KN which acts at mid point of AC , i.e at $\frac{4}{2} = 2m$ from A





Applying $\sum H = O(\rightarrow +)$

 $H_B = 0$

Applying $\sum V = 0(\uparrow +)$

$$V_A + V_B - 8 - 8 - (3 \times 4) = 0$$

 $V_A + V_B = 28$ (1)

Applying $\sum m_A = 0(\gamma +)$


$$(8 \times 6) + (8 \times 6) + (3 \times 4 \times \frac{4}{2}) - (V_B \times 10) = 0$$

 $V_B = 13.6 \ KN(\uparrow)$

Substitute V_B in (1)

$$V_A = 14.4 \ KN(\uparrow)$$

Problem 15: Calculated the support reaction of a simply supported beam shown in fig

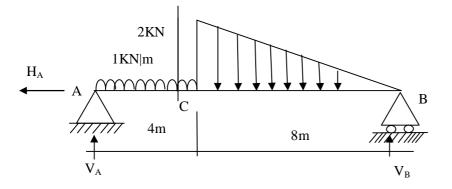

Solution:

Total udl load is $1 \times 4 = 4KN$ which is located at mid point of AC.

Total load of triangular load is area of the triangle i.e $\frac{1}{2} \times 8 \times 2 = 8KN$ acts at centroid of the triangle, at $\frac{2}{3} \times 8 = 5.33 m$ from B.

Applying
$$\Sigma H = 0$$
; $H_A = 0$
Applying $\Sigma V = 0(\uparrow +)$
 $V_A + V_B - (1 \times 4) - (\frac{1}{2} \times 8 \times 2) = 0$
 $V_A + V_B = 12$ (1)

Applying $\sum m_A = 0$ (γ +)





$$(1 \times 4 \times \frac{4}{2}) - [8 \times (12 - 5.33)] - (V_B \times 12) = 0$$

 $12 V_B = 8 + 53.36$
 $V_B = 5.11 \text{ KN} (\uparrow)$

Substitute V_B in (1)

 $V_A = 6.89 KN$