



SNS COLLEGE OF TECHNOLOGY

Coimbatore-35
An Autonomous Institution



Accredited by NBA – AICTE and Accredited by NAAC – UGC with 'A++' Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

DEPARTMENT OF ELECTRONICS & COMMUNICATION ENGINEERING

19ECB211 – MICROCONTROLLER PROGRAMMING & INTERFACING

II YEAR IV SEM

**UNIT I – PIC MICROCONTROLLER : HISTORY ,
FEATURES & ARCHITECTURE**

1.4 - PIC16F877A PIN Configuration



PIC16F877A – Pin Configuration




- Has 40 pins of this microcontroller IC. It consists of two 8 bit and one 16 bit timer
- Capture and compare modules, serial ports, parallel ports and five input/output ports are also present



PIC16F877A – Pin Configuration



PDIP

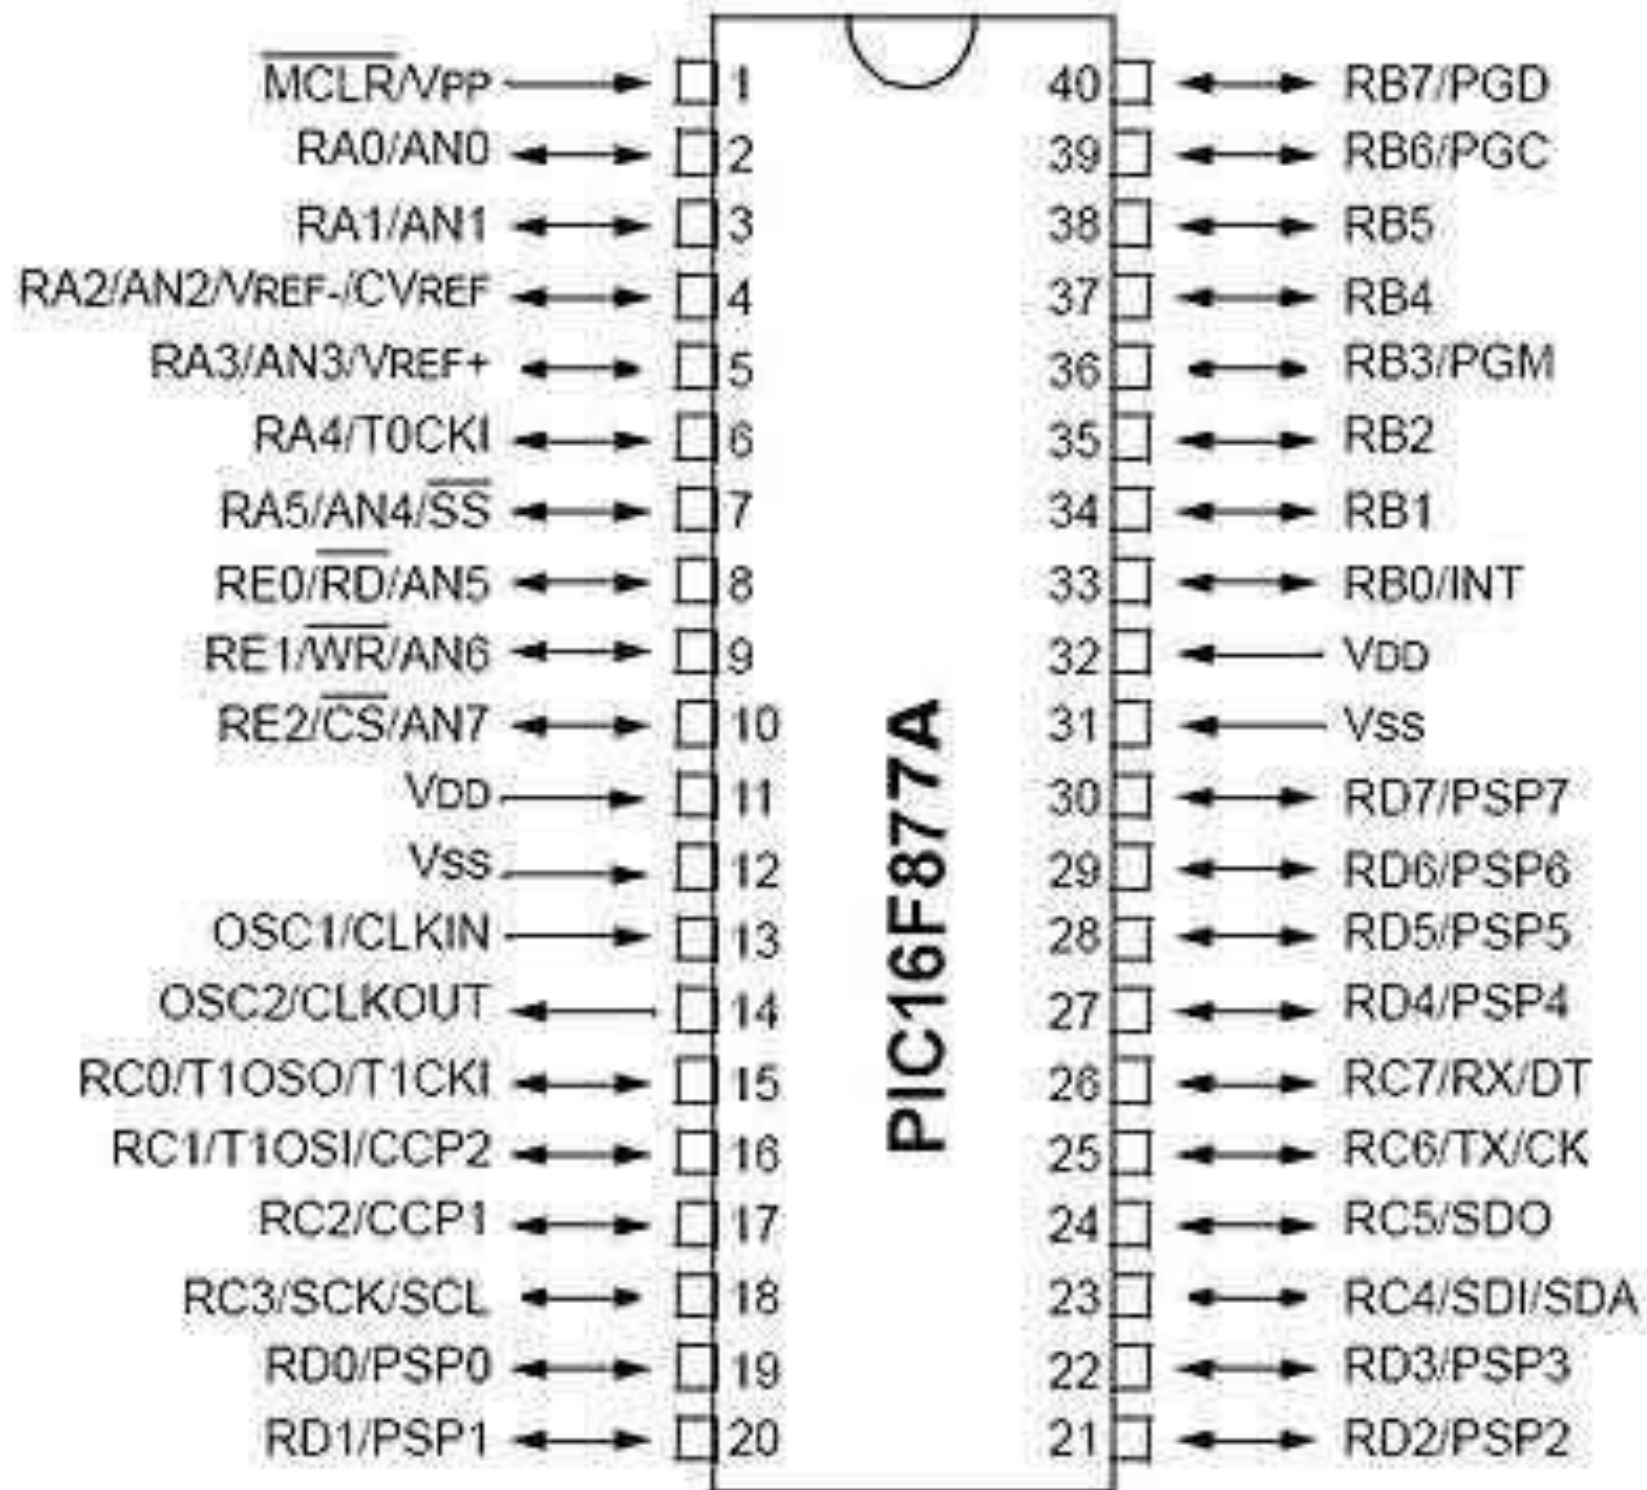



PIC16F877A – Pin Configuration



PIN 1: MCLR : is the master clear pin of this IC. It resets the microcontroller and is active low

PIN 2: RA0/AN0: PORTA consists of 6 pins, from pin 2 to pin 7, all of these are bidirectional input/output pins. Pin 2 is the first pin of this port. This pin can also be used as an analog pin AN0

PIN 3: RA1/AN1: This can be the analog input 1.

PIN 4: RA2/AN2/Vref- : It can also act as the analog input 2.

PIN 5: RA3/AN3/Vref+: It can act as the analog input 3

PIN 6: RA0/T0CKI: To timer0 this pin can act as the clock input pin, the type of output is open drain.

PIN 7: RA5/SS/AN4: This can be the analog input 4

PIN 8: RE0/RD/AN5: PORTE starts from pin 8 to pin 10 and this is also a bidirectional I/O port

PIN 9: RE1/WR/AN6: It can be the analog input 6

PIN 10: RE2/CS/A7: It can be the analog input 7, or for the parallel slave port it can act as the 'control select' which will also be active low just like read and write control pins



PIC16F877A – Pin Configuration



PIN 11 and 32: VDD: These two pins are the positive supply for the input/output and logic pins

PIN 12 and 31: VSS: These pins are the ground reference for input/output and logic pins

PIN 13: OSC1/CLKIN: This is the oscillator input or the external clock input pin.

PIN 14: OSC2/CLKOUT: This is the oscillator output pin. A crystal resonator is connected between pin 13 and 14 to provide external clock to the microcontroller

PIN 15: RC0/T1OCO/T1CKI: PORTC consists of 8 pins

PIN 16: RC1/T1OSI/CCP2: It can be the oscillator input of timer 1 or the capture 2 input/compare 2 output/ PWM 2 output.

PIN 17: RC2/CCP1: It can be the capture 1 input/ compare 1 output/ PWM 1 output.

PIN 18: RC3/SCK/SCL: It can be the output for SPI or I2C modes and can be the input/output for synchronous serial clock.



PIC16F877A – Pin Configuration



PIN 23: RC4/SDI/SDA: It can be the SPI data in pin. Or in I2C mode it can be data input/output pin.

PIN 24: RC5/SDO: It can be the data out of SPI in the SPI mode.

PIN 25: RC6/TX/CK: It can be the synchronous clock or USART Asynchronous transmit pin.

PIN 26: RC7/RX/DT: It can be the synchronous data pin or the USART receive pin.

PIN 19,20,21,22,27,28,29,30: All of these pins belong to PORTD which is again a bidirectional input and output port. When the microprocessor bus is to be interfaced, it can act as the parallel slave port.

PIN 33-40: PORT B: All these pins belong to PORTB. Out of which RB0 can be used as the external interrupt pin and RB6 and RB7 can be used as in-circuit debugger pins.



THANK YOU