




# Non Deterministic Finite Automata (NFA)

- If there is more than one possible transition from one state on the same input symbol.
- Particular input  $\rightarrow$  multiple states
- Exact movement of machine cannot be determined (Non-Deterministic)
- It can have  $\epsilon$  transition
- $\{Q, \Sigma, q_0, F, \delta\}$
- $Q = \{q_0, q_1, q_2\}$
- $\Sigma = \{a, b\}$
- $q_0 = q_0$
- $F = q_1$
- $\delta = Q^* \Sigma = 2^Q$




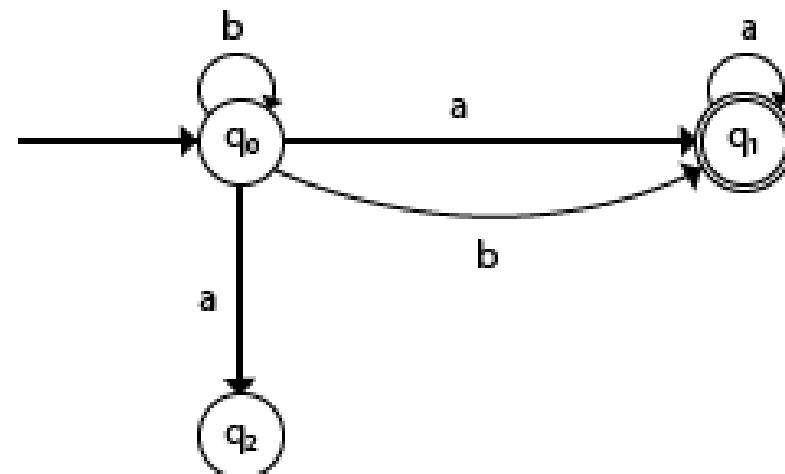

# NFA

- Transition Table


	a	b
q0	q1, q2	q0,q1
q1	q1	-
Q2	-	-

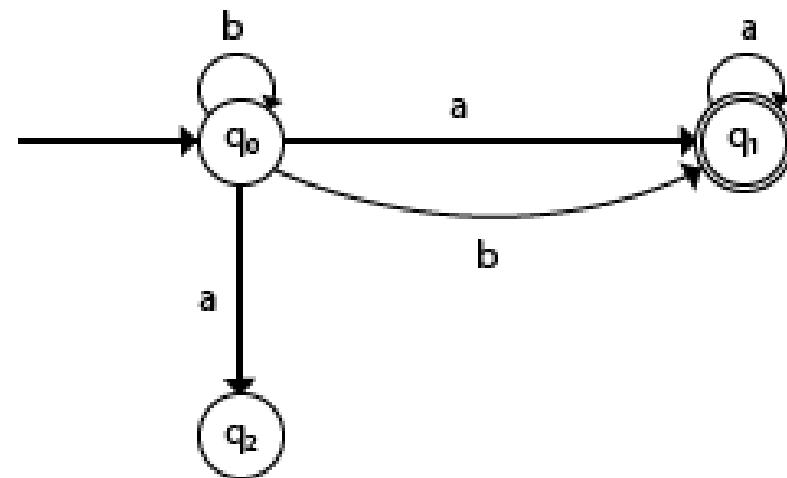



## NFA - Examples

- Set of strings over {0,1} that end with '0'

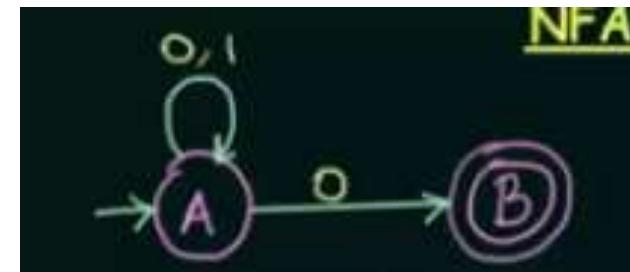


- Transitions  $\rightarrow Q^* \Sigma = 2^Q$
- $Q \rightarrow 2$  states  $\rightarrow 2^Q \rightarrow 4$
- $A \rightarrow \text{null}, A, B, AB \rightarrow 4$  possibilities



## NFA - Examples

String which begins with '0'  $\rightarrow 0(0+1)^*$

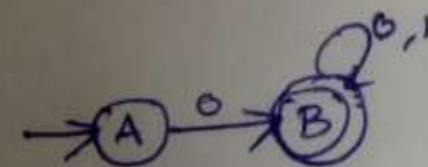




## NFA - Examples

Starts with '0' & ends with '10'


$$R \cdot L = \{010, 0010, 0110, 00110, 011010, \dots\}$$

$$R \cdot E = 0(0+1)^*10$$

DFA

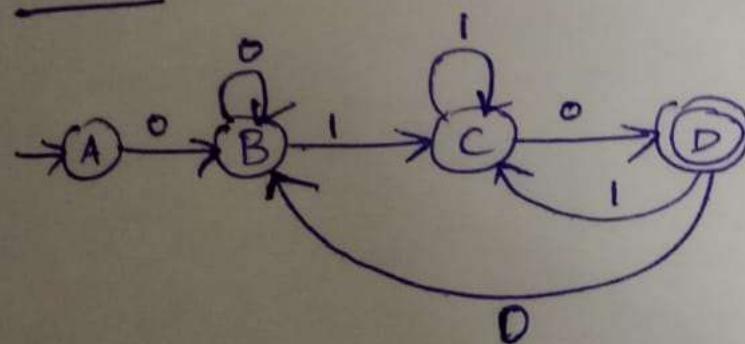

NFA

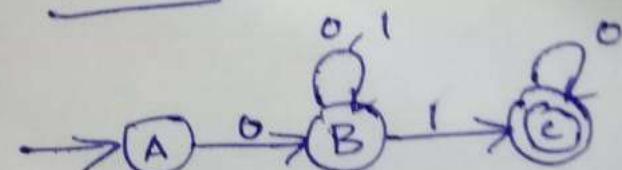



## NFA - Examples

- Set of strings over  $\{0,1\}$  that starts with 0 and ends with 1
- Set of strings over  $\{0,1\}$  that start with 1 and end with 0
- Set of strings over  $\{a,b\}$  that ends with bb
- Set of strings over  $\{a,b\}$  that has atleast 1 a
- Set of strings over  $\{a,b\}$  that has atmost 1 a




# Equivalence of NFA & DFA

- Every DFA is an NFA, Every NFA is not DFA
- $\text{NFA} \rightarrow \text{DFA} \rightarrow L(N) == L(D)$
- $\text{NFA} = \{Q, \Sigma, q_0, F, \delta\}$
- $\text{DFA} = \{Q', \Sigma, q_0, F', \delta'\}$
- Steps for converting NFA to DFA
  - Initially  $Q' = \emptyset$
  - $Q' = \{q_0\}$
  - For each state in  $Q'$  find the possible set of states for each input symbol. If this set of states is not in  $Q'$  add them to  $Q'$
  - Final state of DFA will be the states which contain Final states of NFA



# Equivalence of NFA & DFA

- NFA which accepts all the strings ending with 01

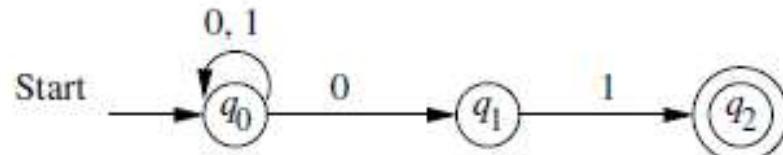

	0	1
$q_0$	$q_0, q_1$	$q_0$
$q_1$	-	$q_2$
$q_2$	-	-

- DFA Construction
  - $Q' = \text{NULL}$
  - $Q' = \{q_0, \{q_0, q_1\}, \{q_0, q_2\}\}$

	0	1
(initial) $q_0$	$\{q_0, q_1\}$	$q_0$
$\{q_0, q_1\}$	$\{q_0, q_1\}$	$\{q_0, q_2\}$
(Final) $\{q_0, q_2\}$	$\{q_0, q_1\}$	$q_0$




# Equivalence of NFA & DFA

- DFA Construction – strings that end with 01

–  $Q' = \{q_0, \{q_0, q_1\}, \{q_0, q_2\}\}$

	0	1
$q_0$	$\{q_0, q_1\}$	$q_0$
$\{q_0, q_1\}$	$\{q_0, q_1\}$	$\{q_0, q_2\}$
$\{q_0, q_2\}$	$\{q_0, q_1\}$	$q_0$

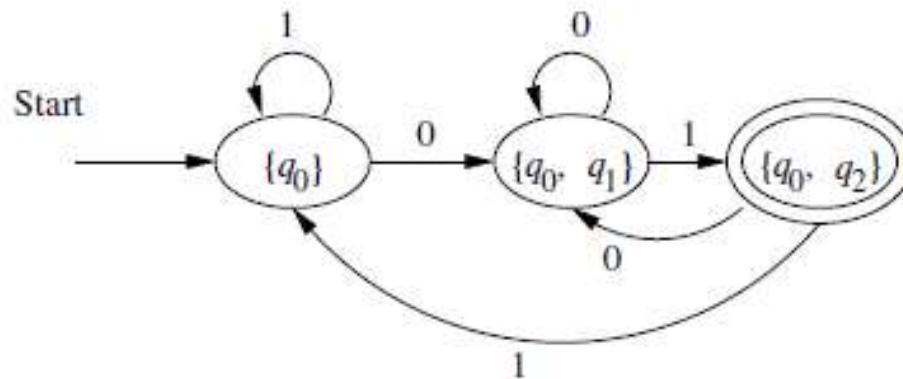



# Equivalence of NFA & DFA- Example

- Construct the NFA for the given transition table and find the equivalent DFA

<b>States/ Inputs</b>	<b>0</b>	<b>1</b>
<b>A</b>	A	B
<b>B</b>	B	A,B