




- ① A block of mass 75 kg slides down a 30° inclined plane from rest, as shown. After moving 1.2 m, the block strikes a spring whose modulus is 20 N/mm. Determine the max deformation of spring. Take coefficient of kinetic friction b/w the block and plane is 0.25

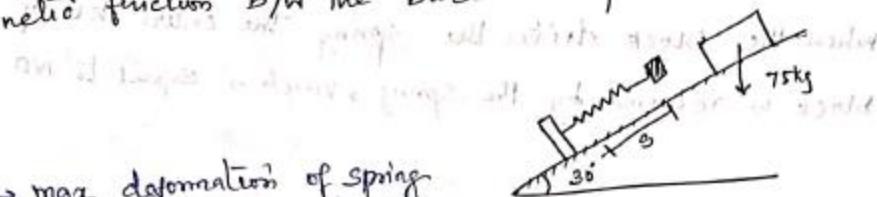

\Rightarrow max deformation of spring

$u \rightarrow$ velocity at which the block strikes.

Resolving the force normal to plane

$$N_R = (75 \times 9.81 \cos 30) = 0$$

$$N_R = 637.17 \text{ N}$$


Resolving the force along the plane,

$$\sum F_x = -(75 \times 9.81 \sin 30) + F$$

$$\sum F_x = -(75 \times 9.81 \sin 30) + M \cdot a$$

$$= -208.58 \text{ N}$$

$$\sum F_x = 208.58 \text{ N}$$



Second law of motion \rightarrow Newton

$$P = ma$$

$$a = P/m = \frac{208.58}{75} = 2.781 \text{ m/s}^2$$

$$V^2 = u^2 + 2as \quad (u = 0)$$

$$V^2 = 0 + 2 \times 2.781 \times 1.2$$

$$V = 2.583 \text{ m/s}$$



Q1 A car of mass 300 kg is travelling at 36 kmph on a level road. It is brought to rest after travelling a distance of 5m. What is the average force of resistance acting on car.

Q2 From Conservation of Energy

$$\text{mass, } m = 300 \text{ kg}$$

$$u = 36 \text{ kmph} = \frac{36 \times 1000}{3600} = 10 \text{ m/s}$$

$$v = 0$$

$$\text{distance travelled, } s = 5 \text{ m}$$

Find the average resistance?

Force of resistance be 'F'

$$\text{K.E of the moving car, } KE = \frac{1}{2} mu^2$$
$$= \frac{1}{2} \times 300 \times 10^2 = 15000 \text{ Nm}$$

The moving car is brought to rest.

Whole K.E is lost at a distance of 5m.

K.E = Workdone by resistance

15000 = Resistance X distance

$$15000 = F \times 5$$

$$F = 3000 \text{ N}$$

$$W_{PM} = 3 \cdot T$$

Apply work energy method.

Workdone = change in K.E

$$(-F) \cdot s = \frac{W}{2g} \times (v^2 - u^2)$$

$$-F \times 5 = \frac{300 \times 9.81}{2 \times 9.81} (0 - 10^2)$$

$$F = 3000 \text{ N}$$

$$(m)a = -F \Rightarrow ma = 0$$

$$F = -ma$$

$$v^2 = u^2 + 2as$$

$$0 = 10^2 + (2 \times a \times 5)$$

$$a = -\frac{100}{10} = -10 \text{ m/s}^2$$

$$F = -ma \cdot v$$


$$= -300 \times (-10)$$

$$= 3000 \text{ N}$$



(P) Two weights 80N and 20N are connected by a thread and move along a rough horizontal plane under the action of a force 40N applied to the first weight of 80N as shown. The coefficient of friction between the sliding surfaces of the weights and the plane is 0.3. Determine the acceleration of the weights and the tension in the thread using D'Alembert's principle.

Soln:




a = acceleration of the weights

T = Tension in the thread.

Consider 80N Block.

with the forces, the block will move towards right.



D'Alembert's principle states the body is in equilibrium condition, with the imaginary force 'ma' (called inertia force) in opposite direction.

$$\Sigma v = 0 \quad (\uparrow)$$

$$N_1 - 80 = 0 \quad \text{or} \quad N_1 = 80\text{N}$$

$$\Sigma H = 0 \quad (\rightarrow)$$

$$40 - T - F_1 - Ma = 0$$

$$40 - T - (\mu N_1) - Ma = 0$$

$$40 - T - (0.3 \times 80) - \left(\frac{80}{9.81} \times a\right) = 0$$

$$T + 8.185a = 16 \rightarrow ①$$