



## Random Access

In random access protocol, **one or more stations cannot depend on another station nor any station control another station**. Depending on the channel's state (idle or busy), each station transmits the data frame. However, if more than one station sends the data over a channel, there may be a collision or data conflict.

In this protocol, all the station has the equal priority to send the data over a channel. In random access protocol, one or more stations cannot depend on another station nor any station control another station. Depending on the channel's state (idle or busy), each station transmits the data frame. However, if more than one station sends the data over a channel, there may be a collision or data conflict. Due to the collision, the data frame packets may be lost or changed. And hence, it does not receive by the receiver end.

Following are the different methods of random-access protocols for broadcasting frames on the channel.


- Aloha
- CSMA
- CSMA/CD
- CSMA/CA

### ALOHA Random Access Protocol

It is designed for wireless LAN (Local Area Network) but can also be used in a shared medium to transmit data. Using this method, any station can transmit data across a network simultaneously when a data frameset is available for transmission.

### Aloha Rules

1. Any station can transmit data to a channel at any time.
2. It does not require any carrier sensing.
3. Collision and data frames may be lost during the transmission of data through multiple stations.
4. Acknowledgment of the frames exists in Aloha. Hence, there is no collision detection.
5. It requires retransmission of data after some random amount of time.

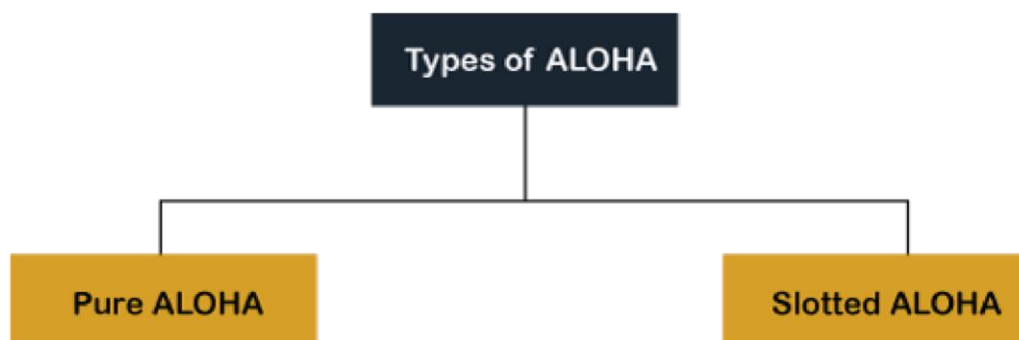



SNS COLLEGE OF TECHNOLOGY, COIMBATORE –35  
(An Autonomous Institution)



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING  
CSMA (Carrier Sense Multiple Access)

It is a **carrier sense multiple access** based on media access protocol to sense the traffic on a channel (idle or busy) before transmitting the data. It means that if the channel is idle, the station can send data to the channel. Otherwise, it must wait until the channel becomes idle. Hence, it reduces the chances of a collision on a transmission medium.

### CSMA Access Modes

**1-Persistent:** In the 1-Persistent mode of CSMA that defines each node, first sense the shared channel and if the channel is idle, it immediately sends the data. Else it must wait and keep track of the status of the channel to be idle and broadcast the frame unconditionally as soon as the channel is idle.


**Non-Persistent:** It is the access mode of CSMA that defines before transmitting the data, each node must sense the channel, and if the channel is inactive, it immediately sends the data. Otherwise, the station must wait for a random time (not continuously), and when the channel is found to be idle, it transmits the frames.

**P-Persistent:** It is the combination of 1-Persistent and Non-persistent modes. The P-Persistent mode defines that each node senses the channel, and if the channel is inactive, it sends a frame with a **P** probability. If the data is not transmitted, it waits for a (**q = 1-p probability**) random time and resumes the frame with the next time slot.


**O- Persistent:** It is an O-persistent method that defines the superiority of the station before the transmission of the frame on the shared channel. If it is found that the channel is inactive, each station waits for its turn to retransmit the data.




DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

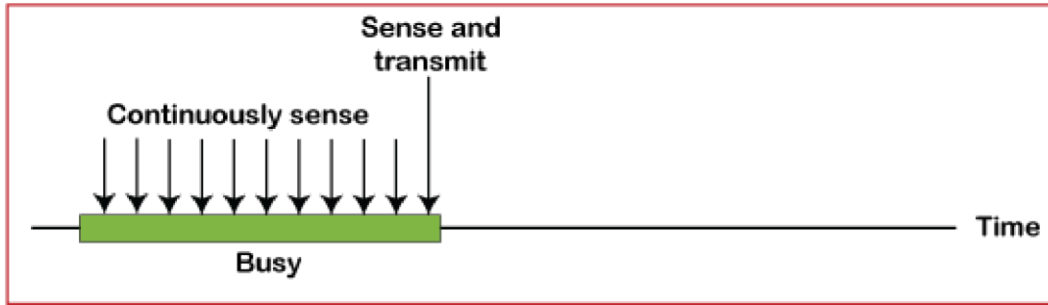

a. 1-persistent

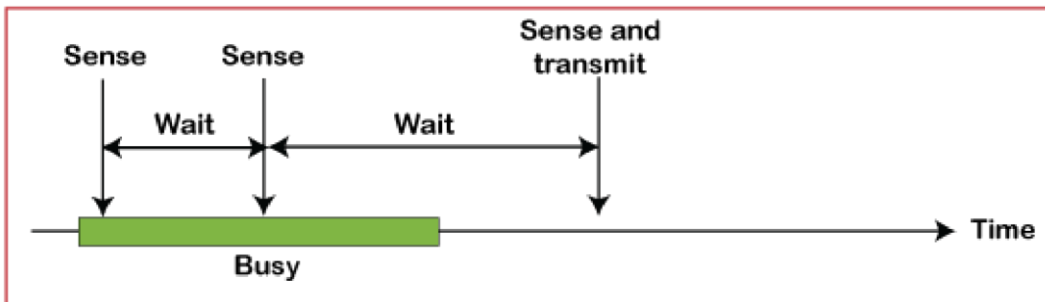

b. Nonpersistent

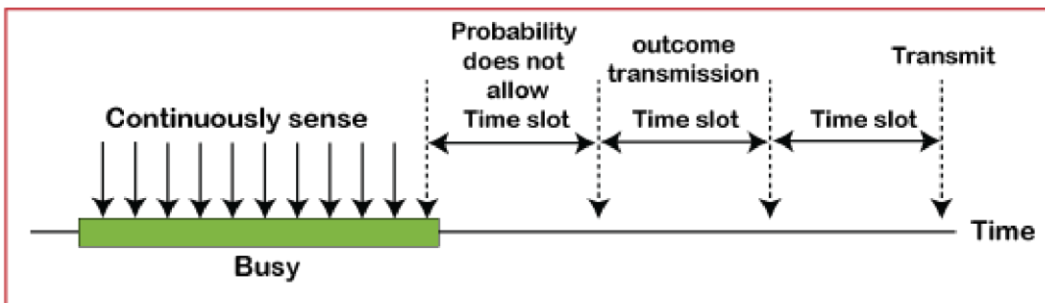

c. p-persistent

### CSMA/ CD

It is a **carrier sense multiple access/ collision detection** network protocol to transmit data frames. The CSMA/CD protocol works with a medium access control layer. Therefore, it first senses the shared channel before broadcasting the frames, and if the channel is idle, it transmits a frame to check whether the transmission was successful. If the frame is successfully received, the station sends another frame. If any collision is detected in the CSMA/CD, the station sends a jam/ stop signal to the shared channel to terminate data transmission. After that, it waits for a random time before sending a frame to a channel.

### CSMA/ CA

It is a **carrier sense multiple access/collision avoidance** network protocol for carrier transmission of data frames. It is a protocol that works with a medium access control layer. When a data frame is sent to a channel, it receives an acknowledgment to check whether the channel is clear. If the station receives only a single (own) acknowledgments, that means the data frame has been successfully transmitted to the



## DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

receiver. But if it gets two signals (its own and one more in which the collision of frames), a collision of the frame occurs in the shared channel. Detects the collision of the frame when a sender receives an acknowledgment signal.

Following are the methods used in the CSMA/ CA to avoid the collision:

**Interframe space:** In this method, the station waits for the channel to become idle, and if it gets the channel is idle, it does not immediately send the data. Instead of this, it waits for some time, and this time period is called the **Interframe** space or IFS. However, the IFS time is often used to define the priority of the station.

**Contention window:** In the Contention window, the total time is divided into different slots. When the station/ sender is ready to transmit the data frame, it chooses a random slot number of slots as **wait time**. If the channel is still busy, it does not restart the entire process, except that it restarts the timer only to send data packets when the channel is inactive.

**Acknowledgment:** In the acknowledgment method, the sender station sends the data frame to the shared channel if the acknowledgment is not received ahead of time.

### B. Controlled Access Protocol

It is a method of reducing data frame collision on a shared channel. In the controlled access method, each station interacts and decides to send a data frame by a particular station approved by all other stations. It means that a single station cannot send the data frames unless all other stations are not approved. It has three types of controlled access: **Reservation, Polling, and Token Passing**.

### C. Channelization Protocols

It is a channelization protocol that allows the total usable bandwidth in a shared channel to be shared across multiple stations based on their time, distance and codes. It can access all the stations at the same time to send the data frames to the channel.

Following are the various methods to access the channel based on their time, distance and codes:


1. FDMA (Frequency Division Multiple Access)
2. TDMA (Time Division Multiple Access)
3. CDMA (Code Division Multiple Access)

### FDMA

It is a frequency division multiple access (**FDMA**) method used to divide the available bandwidth into equal bands so that multiple users can send data through a different frequency to the subchannel. Each station is reserved with a particular band to prevent the crosstalk between the channels and interferences of stations.



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

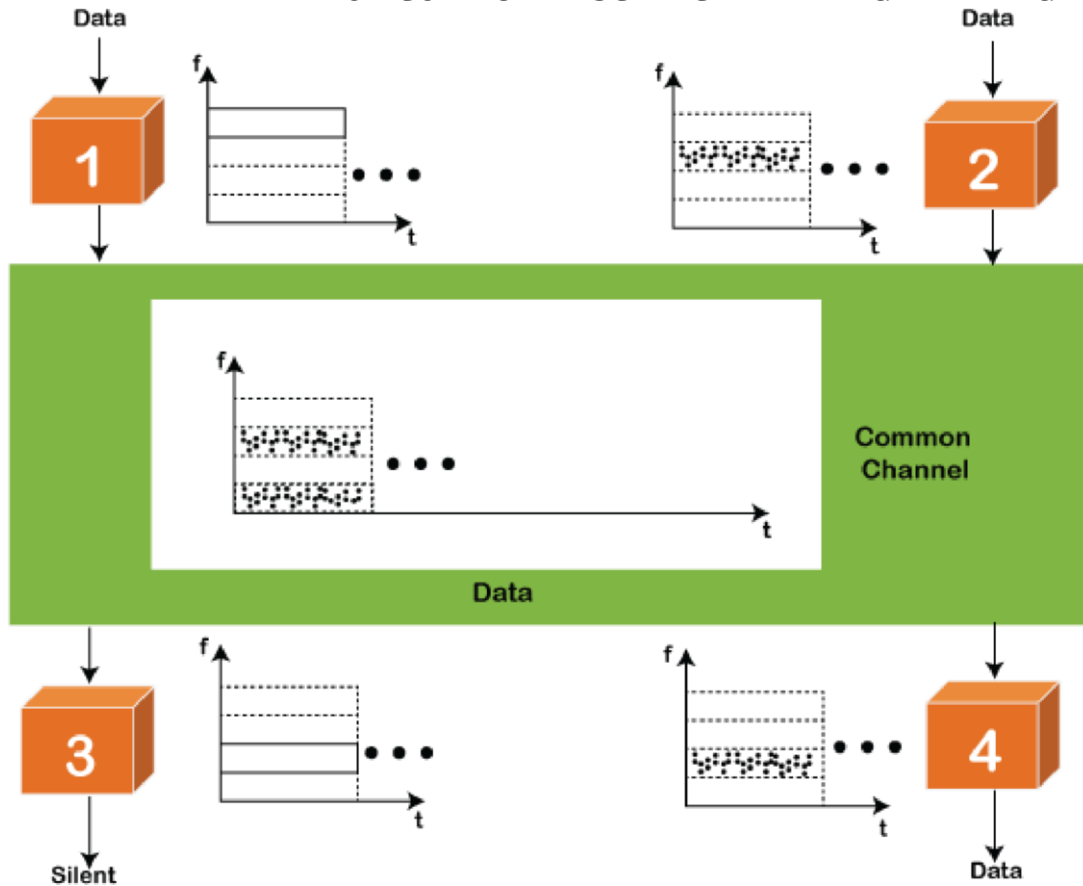

### TDMA

Time Division Multiple Access (**TDMA**) is a channel access method. It allows the same frequency bandwidth to be shared across multiple stations. And to avoid collisions in the shared channel, it divides the channel into different frequency slots that allocate stations to transmit the data frames. The same **frequency** bandwidth into the shared channel by dividing the signal into various time slots to transmit it. However, TDMA has an overhead of synchronization that specifies each station's time slot by adding synchronization bits to each slot.

### CDMA

The code division multiple access (**CDMA**) is a channel access method. In CDMA, all stations can simultaneously send the data over the same channel. It means that it allows each station to transmit the data frames with full frequency on the shared channel at all times. It does not require the division of bandwidth on a shared channel based on time slots. If multiple stations send data to a channel simultaneously, their data frames are separated by a unique code sequence. Each station has a different unique code for transmitting the data over a shared channel. For example, there are multiple users in a room that are continuously speaking. Data is received by the users if only two-person interact with each other using the same language. Similarly, in the network, if different stations communicate with each other simultaneously with different code language.