

METAL CASTING PROCESSES

UNIT I METAL CASTING & JOINING PROCESSES

Die-casting - centrifugal casting

SNS COLLEGE OF TECHNOLOGY Permanent Mold Casting Processes

- Economic disadvantage of expendable mold
 Departing an application of personal properties of personal personal properties of personal properties of personal properties of personal personal
 - In permanent mold casting, the mold is reused many times
 - The processes include:
 - Basic permanent mold casting
 - Die casting
 - Centrifugal casting



The Basic Permanent Mold Process

Uses a metal mold constructed of two sections designed for easy, precise opening and closing

- Molds used for casting lower melting point alloys are commonly made of steel or cast iron
- Molds used for casting steel must be made of refractory material, due to the very high pouring temperatures



Permanent Mold Casting

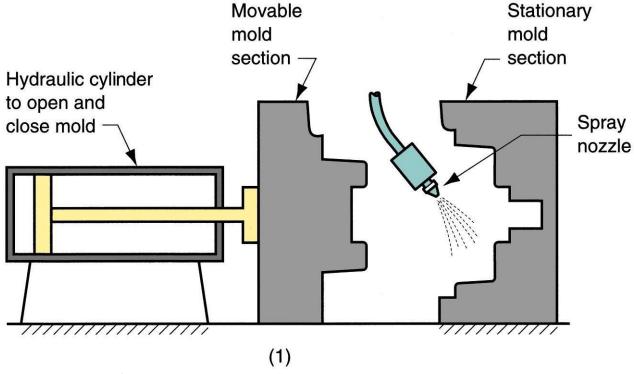
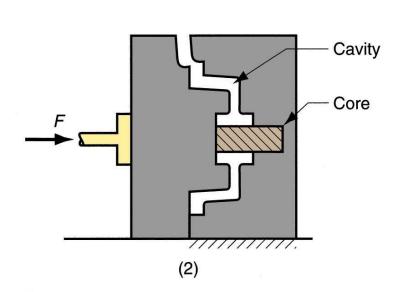


Figure Steps in permanent mold casting: (1) mold is preheated and coated

SNS COLLEGE OF TECHNOLOGY Department of Aerospace Engineering

Permanent Mold Casting



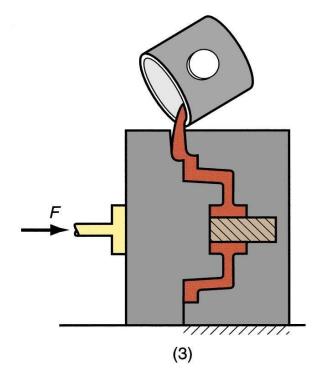


Figure Steps in permanent mold casting: (2) cores (if used) are inserted and mold is closed, (3) molten metal is poured into the mold, where it solidifies.



Advantages and Limitations

- Advantages of permanent mold casting:
 - Good dimensional control and surface finish
 - More rapid solidification caused by the cold metal mold results in a finer grain structure, so castings are stronger
- Limitations:
 - Generally limited to metals of lower melting point
 - Simpler part geometries compared to sand casting because of need to open the mold
 - High cost of mold

SNS COLLEGE OF TECHNOLOGY

Department of Aerospace Engineering

Applications of Permanent Mold Casting
Due to high mold cost, process is best suited to high

- Due to high mold cost, process is best suited to high volume production and can be automated accordingly
- Typical parts: automotive pistons, pump bodies, and certain castings for aircraft and missiles
- Metals commonly cast: aluminum, magnesium, copper-base alloys, and cast iron



SNS COLLEGE OF TECHNOLOGY



Department of Aerospace Engineering

A permanent mold casting process in which molten metal is injected into mold cavity under high pressure

Die Casting

- Pressure is maintained during solidification, then mold is opened and part is removed
- Molds in this casting operation are called *dies*; hence the name die casting
- Use of high pressure to force metal into die cavity is what distinguishes this from other permanent mold processes



- Designed to hold and accurately close two mold halves and keep them closed while liquid metal is forced into cavity
- Two main types:

- Die Casting Machines
- 1. Hot-chamber machine
- 2. Cold-chamber machine




Hot-Chamber Die Casting

Metal is melted in a container, and a piston injects liquid metal under high pressure into the die

- High production rates 500 parts per hour not
- uncommon
 - Applications limited to low melting-point metals that do not chemically attack plunger and other
- mechanical components
 - Casting metals: zinc, tin, lead, and magnesium



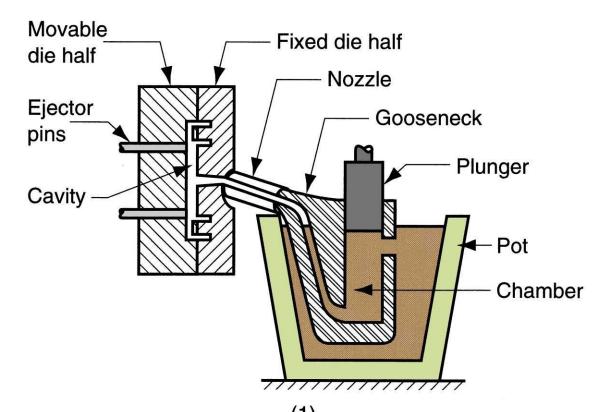

gure Cycle III Hot-chamber casung. (1) with the closed and plunger withdrawn, molten metal flows into the chamber (2) Figure plunger forces metal in chamber to flow into die, maintaining pressure during cooling and solidification.



Molten metal is poured into unheated chamber from external melting container, and a piston injects metal under high pressure into die cavity

- High production but not usually as fast as hot-chamber machines because of pouring step
- Casting metals: aluminum, brass, and magnesium alloys
- Advantages of hot-chamber process favor its use on low melting-point alloys (zinc, tin, lead)

SNS COLLEGE OF TECHNOLOGY



Cold-Chamber Die Casting

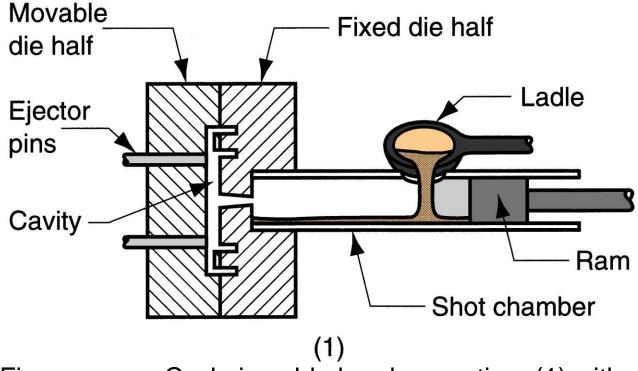


Figure Cycle in cold-chamber casting: (1) with die closed and ram withdrawn, molten metal is poured into the chamber





Cold-Chamber Die Casting

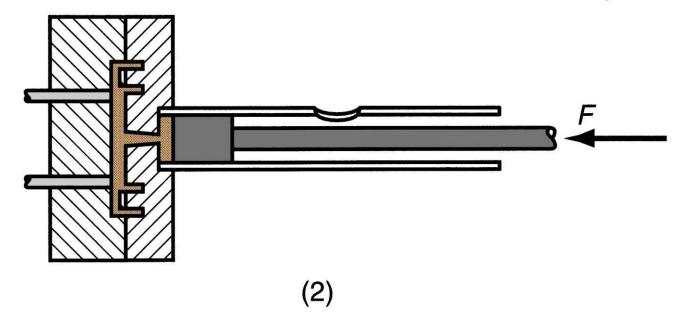


Figure Cycle in cold-chamber casting: (2) ram forces metal to flow into die, maintaining pressure during cooling and solidification.



- Usually made of tool steel, mold steel, or maraging steel
- Tungsten and molybdenum (good refractory qualities) used to die cast steel and cast iron
- Ejector pins required to remove part from die when it opens
- Lubricants must be sprayed into cavities to prevent sticking





Advantages and Limitations Advantages of die casting:

- - Economical for large production quantities
 - Good accuracy and surface finish
 - Thin sections are possible
 - Rapid cooling provides small grain size and good strength to casting
- Disadvantages:
 - Generally limited to metals with low metal points
 - Part geometry must allow removal from die



Centrifugal Casting

A family of casting processes in which the mold is rotated at high speed so centrifugal force distributes molten metal to outer regions of die cavity

- The group includes:
 - True centrifugal casting
 - Semicentrifugal casting
 - Centrifuge casting




True Centrifugal Casting
Molten metal is poured into rotating mold to produce a tubular part

- In some operations, mold rotation commences after pouring rather than before
- Parts: pipes, tubes, bushings, and rings
- Outside shape of casting can be round, octagonal, hexagonal, etc , but inside shape is (theoretically) perfectly round, due to radially symmetric forces



True Centrifugal Casting Figure Setup for true centrifugal casting.

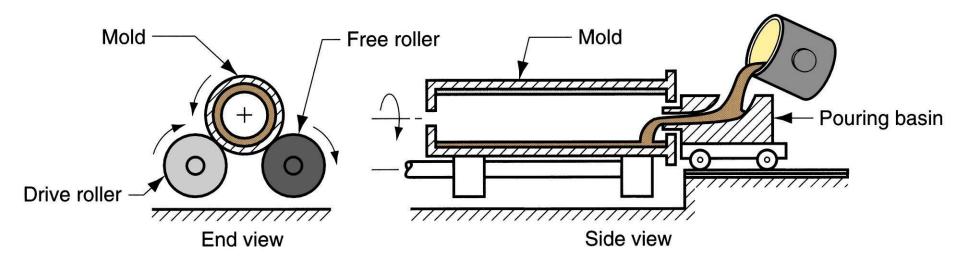



Semicentrifugal Casting
Centrifugal force is used to produce solid castings rather than tubular parts

- Molds are designed with risers at center to supply feed metal
- Density of metal in final casting is greater in outer sections than at center of rotation
- Often used on parts in which center of casting is machined away, thus eliminating the portion where quality is lowest
- Examples: wheels and pulleys



Centrifuge Casting

Mold is designed with part cavities located away from axis of rotation, so that molten metal poured into mold is distributed to these cavities by centrifugal

- toseed for smaller parts
- Radial symmetry of part is not required as in other centrifugal casting methods