



SNS COLLEGE OF ENGINEERING

Kurumbapalayam (PO), Coimbatore - 641 107

Accredited by NAAC-UGC with 'A' Grade

Approved by AICTE, Recognized by UGC & Affiliated to Anna University, Chennai

DEPARTMENT OF INFORMATION TECHNOLOGY


COURSE NAME: 19IT301 COMPUTER ORGANIZATION

AND ARCHITECTURE

II YEAR/ III SEM

Unit 1 : BASIC STRUCTURE OF COMPUTERS Topic 2:

Basic operational concepts – Bus Structures

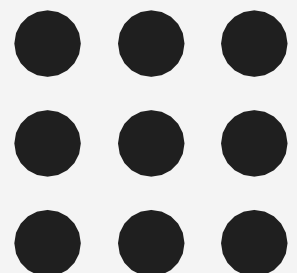




Recap

- Activity in a computer is governed by instructions.
- To perform a task, an appropriate program consisting of a list of instructions is stored in the memory.
- Individual instructions are brought from the memory into the processor, which executes the specified operations.
- Data to be used as operands are also stored in the memory.





Basic Operational Concepts



Instruction:

Add LOCA, R0

- Add the operand at memory location LOCA to the operand in a register R0 in the processor.
- Place the sum into register R0.
- The original contents of LOCA are preserved.
- The original contents of R0 is overwritten.
- Steps involved:
 - ✓ Instruction is fetched from the memory into the processor
 - ✓ the operand at LOCA is fetched and added to the contents of R0
 - ✓ the resulting sum is stored in register R0.




Separate Memory Access and ALU Operation




- Load LOCA, R1 ->Memory Access
- Add R1, R0 -> ALU Operation
- Whose contents will be overwritten? R1 and R0

Connection Between the Processor and the Memory

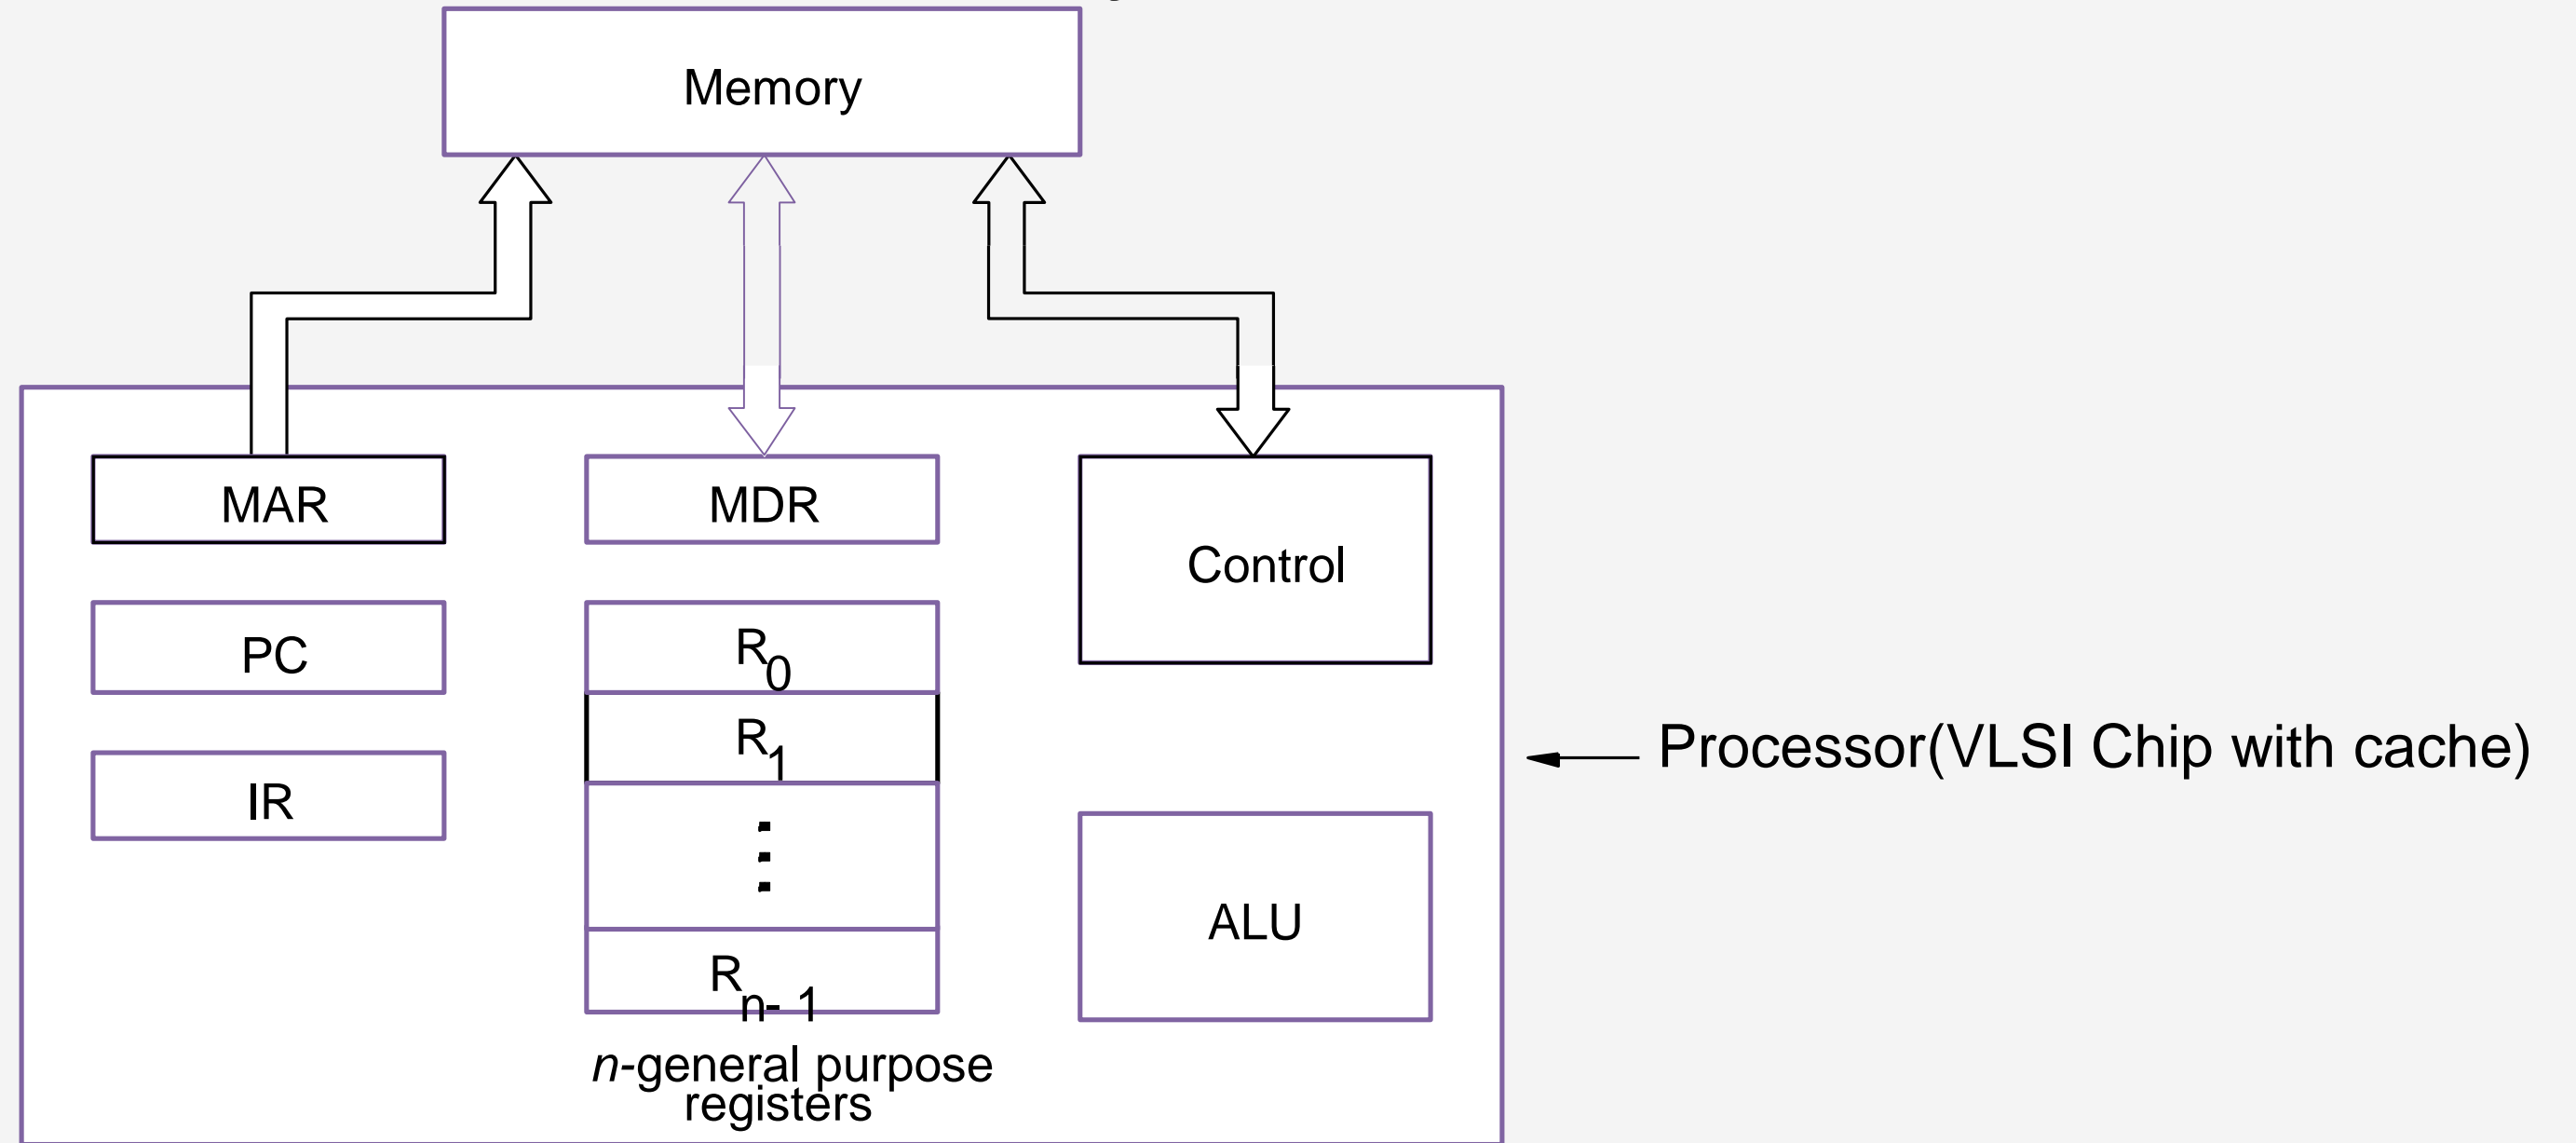


Connections between the processor and the memory.






Registers


- Instruction register (IR)
- Program counter (PC)
- General-purpose register (R0 – Rn-1)
- Memory address register (MAR)
- Memory data register (MDR)





Typical Operating Steps

- Programs reside in the memory through input devices
- PC is set to point to the first instruction
- The contents of PC are transferred to MAR
- A Read signal is sent to the memory
- The first instruction is read out and loaded into MDR
- The contents of MDR are transferred to IR
- Decode and execute the instruction
- Get operands for ALU
 - ✓ Either from general-purpose register or
 - ✓ Memory (address to MAR – Read – MDR to ALU)
- Perform operation in ALU
- Store the result back
 - ✓ To general-purpose register
 - ✓ To memory (address to MAR, result to MDR – Write)
- During the execution, PC is incremented to the next instruction



Interrupt




- Normal execution of programs may be preempted if some device requires urgent servicing.
- The normal execution of the current program must be interrupted – the device raises an interrupt signal.
- Interrupt-service routine
- Current system information backup and restore (PC, general-purpose registers, control information, specific information)



Bus Structures


- There are many ways to connect different parts inside a computer together.
- A group of lines(wires) that serves as a connecting path for several devices is called a *bus*.
- Address/data/control

Single-bus

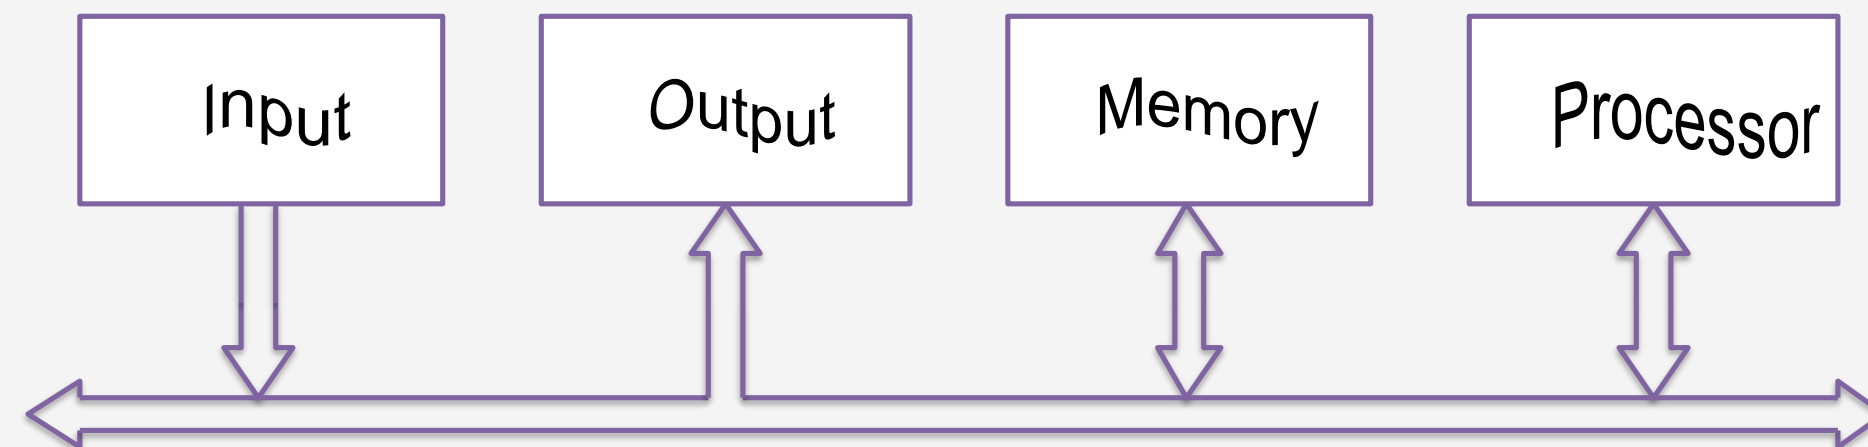




Speed Issue





- Different devices have different transfer/operate speed.
- If the speed of bus is bounded by the slowest device connected to it, the efficiency will be very low.
- How to solve this?
- A common approach – use buffer registers.
e.g.- Printing the characters

Adv. of Buffers: Processor switches rapidly from one device to another.



Identify the Images

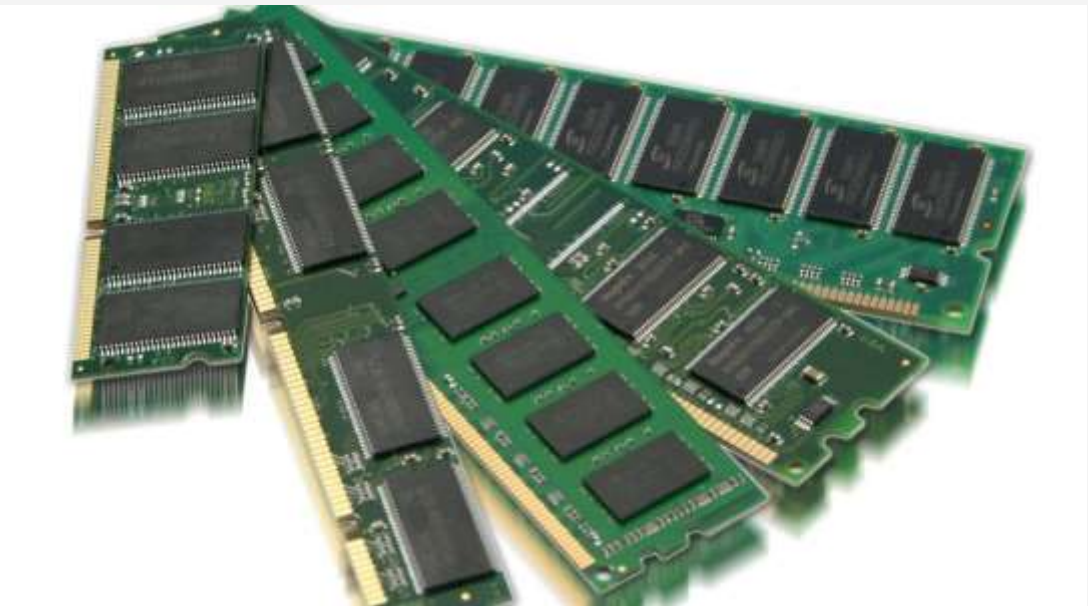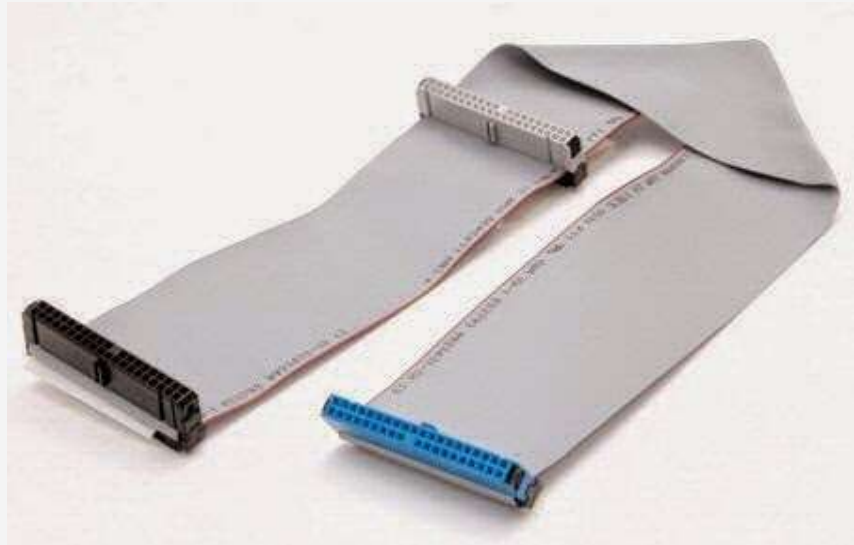



Thank You