



SNS COLLEGE OF ENGINEERING

Kurumbapalayam (Po), Coimbatore – 641 107

An Autonomous Institution

Accredited by NBA – AICTE and Accredited by NAAC – UGC with 'A' Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

DEPARTMENT OF COMPUTER SCIENCE AND TECHNOLOGY

COURSE NAME : 19CS302 AGILE SOFTWARE ENGINEERING

II YEAR /III SEMESTER

Unit 1- Introduction to Software Engineering

Topic 8: Design concepts and model





Brain Storming



1. How to design a product?



Design



Mitch Kapor, the creator of Lotus 1-2-3, presented a “software design manifesto” in *Dr. Dobbs Journal*. He said:

Good software design should exhibit:


Firmness: A program should not have any bugs that inhibit its function.

Commodity: A program should be suitable for the purposes for which it was intended.

Delight: The experience of using the program should be pleasurable one.



Analysis Model -> Design Model

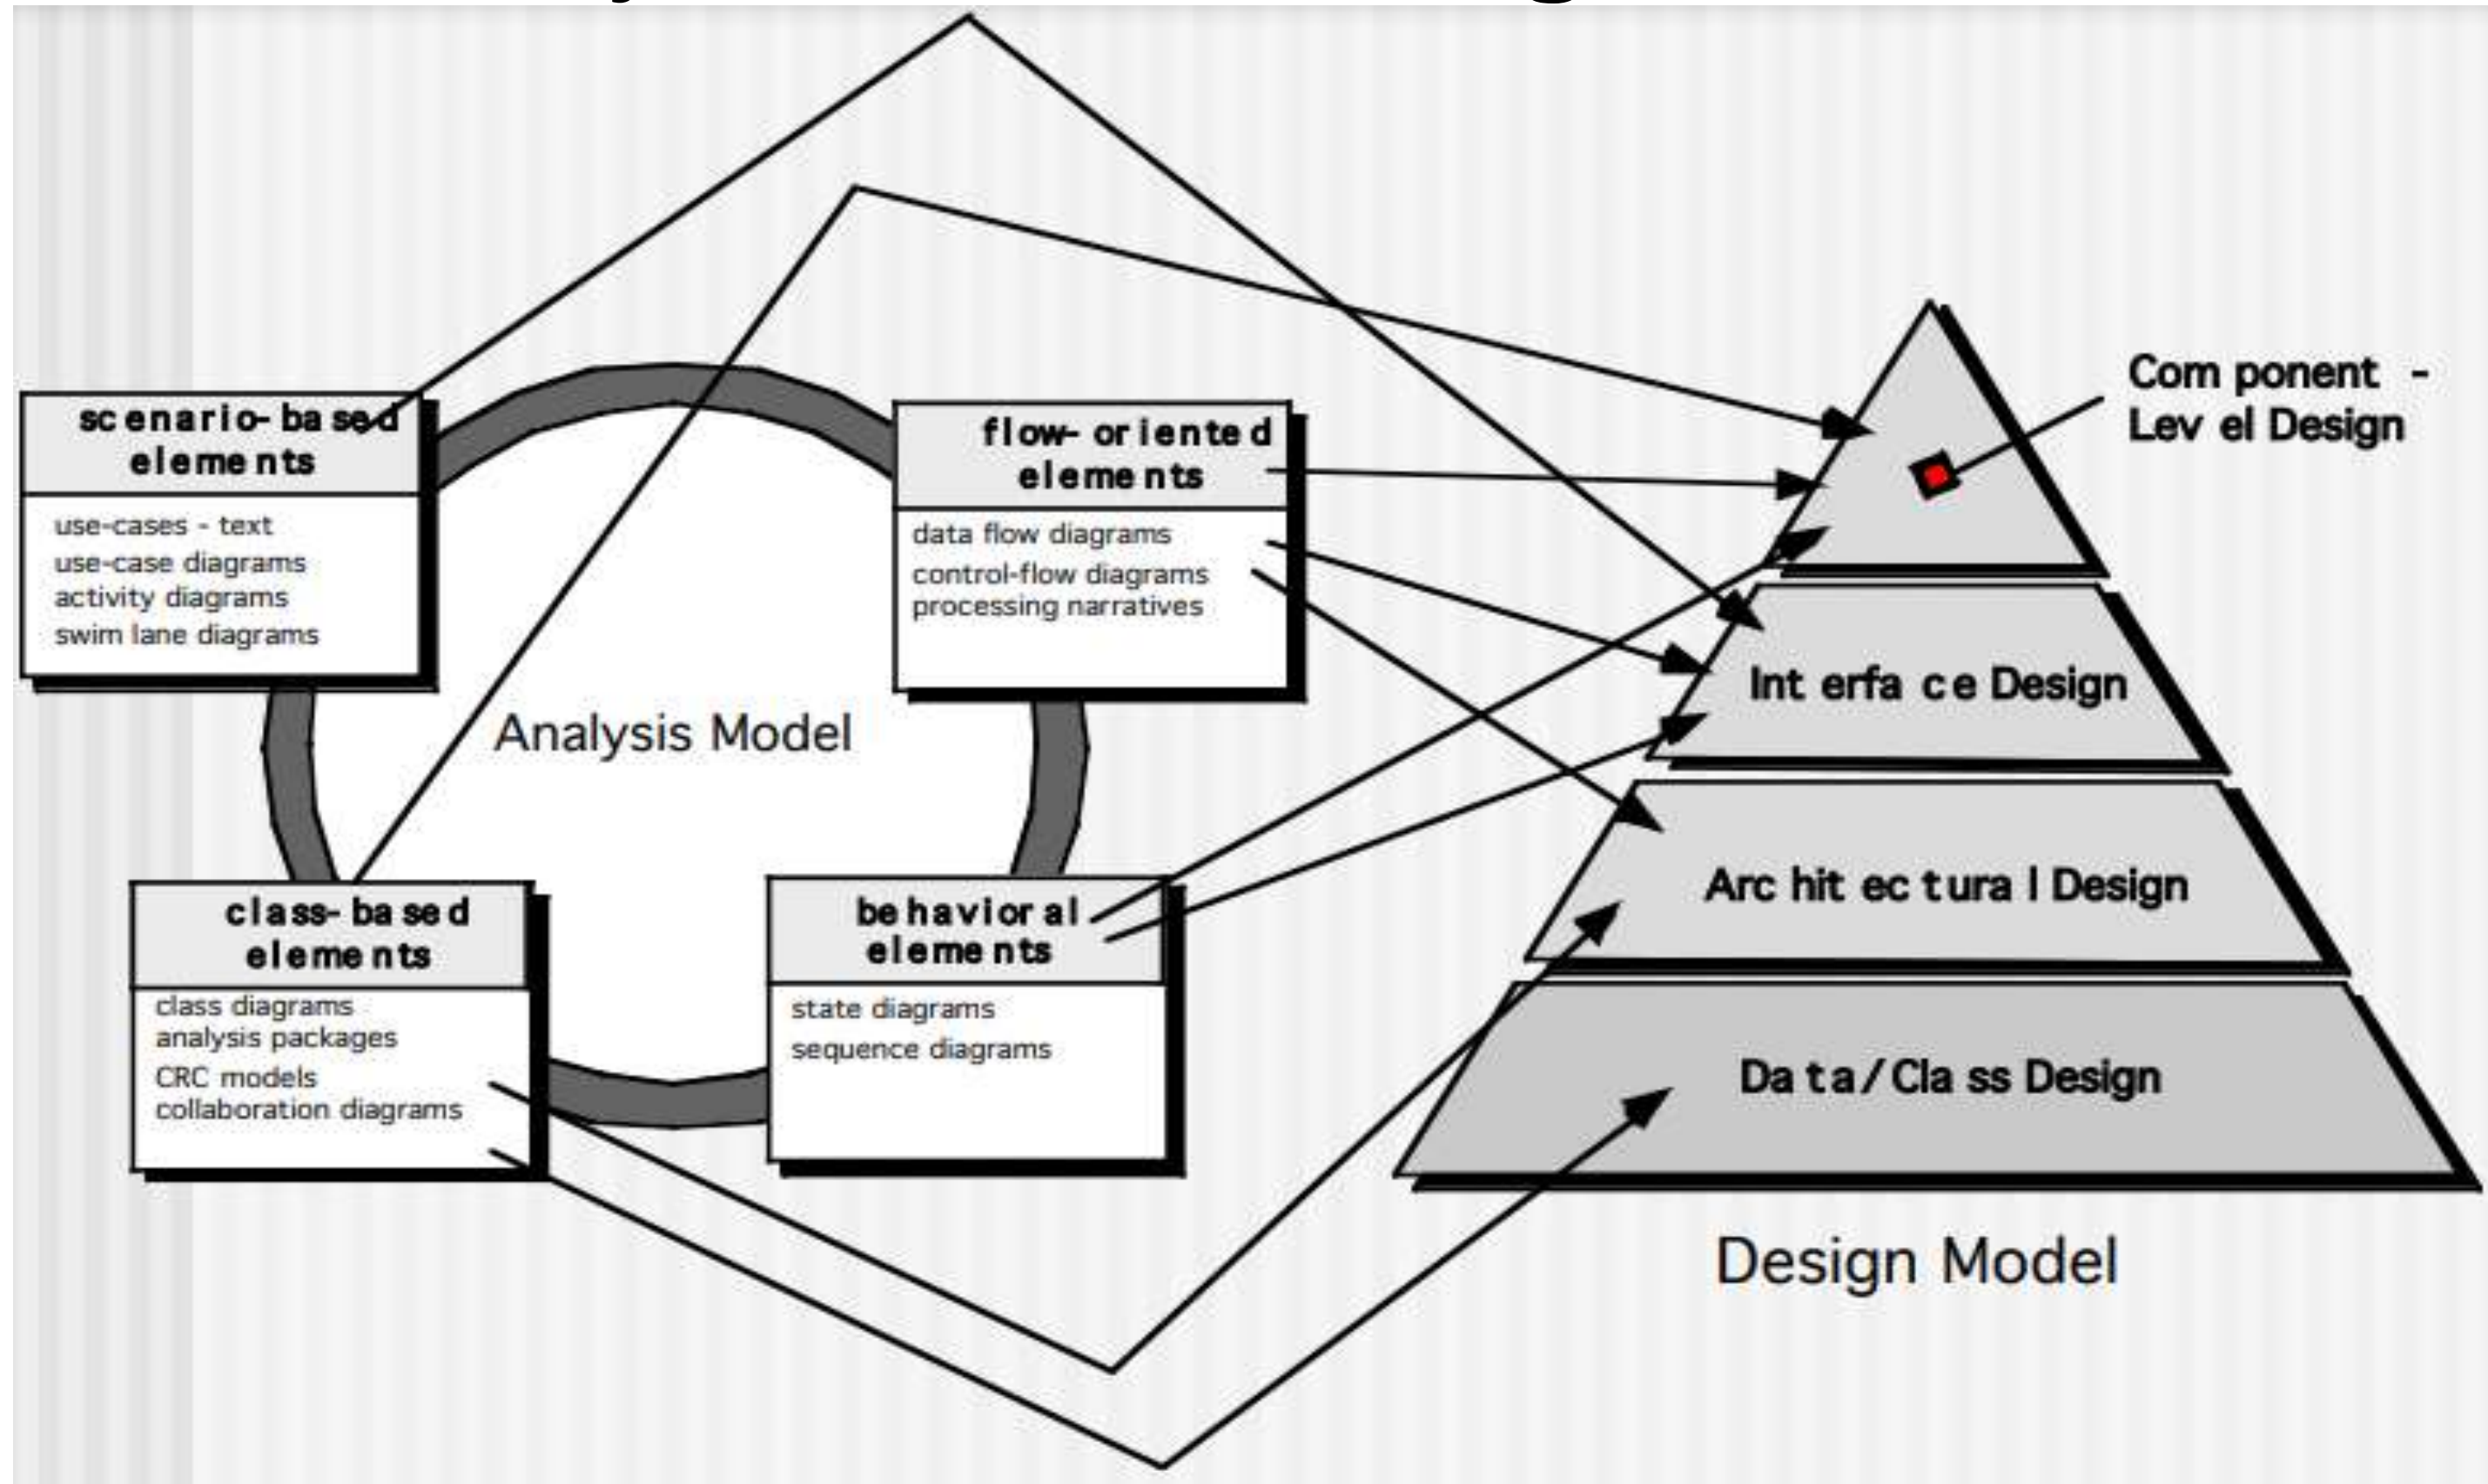



Design and Quality Goals

- **The design must implement all of the explicit requirements** contained in the analysis model, and it must accommodate all of the implicit requirements desired by the customer.
- **The design must be a readable, understandable guide** for those who generate code and for those who test and subsequently support the software.
- **The design should provide a complete picture of the software**, addressing the data, functional, and behavioral domains from an implementation perspective.



How to achieve the Quality?



- **A design should exhibit an architecture** that (1) has been created using recognizable architectural styles or patterns, (2) is composed of components that exhibit good design characteristics and (3) can be implemented in an evolutionary fashion
 - For smaller systems, design can sometimes be developed linearly.
- **A design should be modular**; that is, the software should be logically partitioned into elements or subsystems
- **A design should contain distinct representations** of data, architecture, interfaces, and components.
- **A design should lead to data structures that are appropriate** for the classes to be implemented and are drawn from recognizable data patterns.
- **A design should lead to components that exhibit independent functional characteristics.**
- **A design should lead to interfaces that reduce the complexity** of connections between components and with the external environment.
- **A design should be derived using a repeatable method** that is driven by information obtained during software requirements analysis.
- **A design should be represented using a notation that effectively communicates its meaning.**



Fundamental Concepts in Design



- **Abstraction**—data, procedure, control
- **Architecture**—the overall structure of the software
- **Patterns**—”conveys the essence” of a proven design solution
- **Separation of concerns**—any complex problem can be more easily handled if it is subdivided into pieces
- **Modularity**—manifestation of separation of concerns
- **Information Hiding**—controlled interfaces, no details of algorithms/data
- **Functional independence**—single-minded function and low coupling
- **Refinement**—elaboration of detail for all abstractions
- **Aspects**—a mechanism for understanding how global requirements affect design
- **Refactoring**—a reorganization technique that simplifies the design
- **OO design concepts**—Appendix II
- **Design Classes**—provide design detail that will enable analysis classes to be implemented





Abstraction



- A solution is stated in large terms using the language of the problem environment at the highest level abstraction.
- The lower level of abstraction provides a more detail description of the solution.
- A sequence of instruction that contain a specific and limited function refers in a procedural abstraction.
- A collection of data that describes a data object is a data abstraction.



Data Abstraction



door


- manufacturer model
- number type
- swing direction
- inserts
- lights
 - type number
- weight
- opening mechanism

implemented as a data structure

Describes the door object



Procedural Abstraction

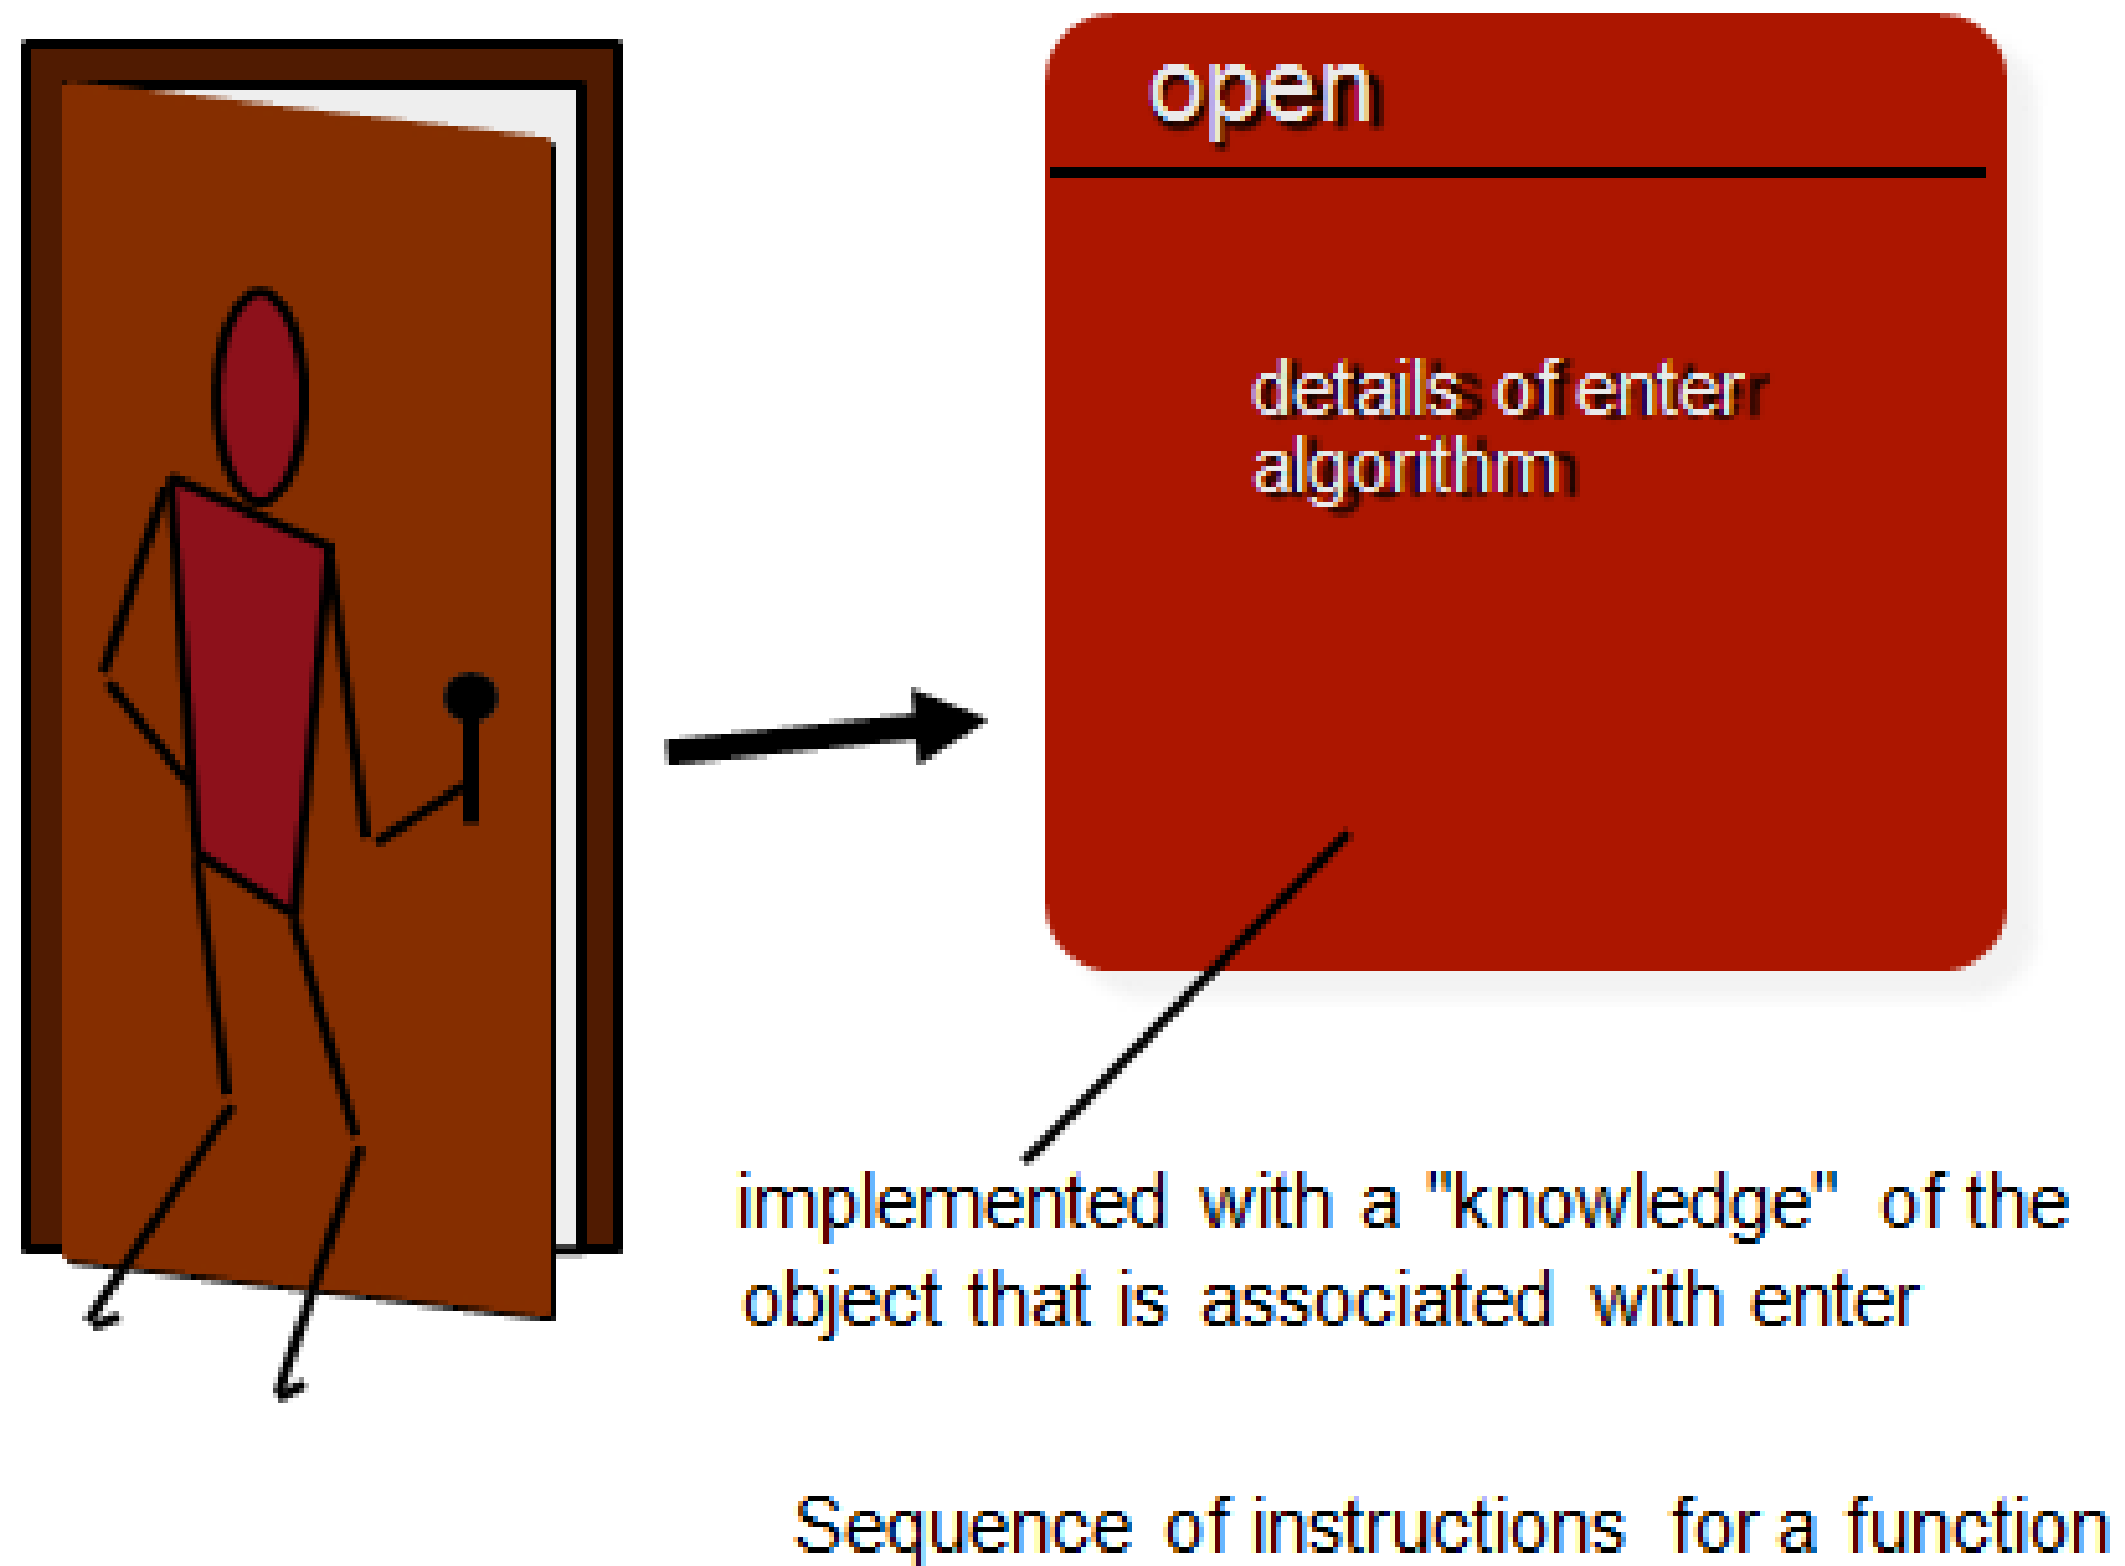



Software Architecture



“The overall structure of the software and the ways in which that structure provides conceptual integrity for a system.” [SHA95a]

Structural properties. This aspect of the architectural design representation defines the components of a system (e.g., modules, objects, filters) and the manner in which those components are packaged and interact with one another. For example, objects are packaged to encapsulate both data and the processing that manipulates the data and interact via the invocation of methods

Extra-functional properties. The architectural design description should address how the design architecture achieves requirements for performance, capacity, reliability, security, adaptability, and other system characteristics.

Families of related systems. The architectural design should draw upon repeatable patterns that are commonly encountered in the design of families of similar systems. In essence, the design should have the ability to reuse architectural building blocks.



Patterns



A design pattern describes a design structure and that structure solves a particular design problem in a specified content.

Design Pattern Template

Pattern name—describes the essence of the pattern in a short but expressive name

Intent—describes the pattern and what it does

Also-known-as—lists any synonyms for the pattern

Motivation—provides an example of the problem

Applicability—notes specific design situations in which the pattern is applicable

Structure—describes the classes that are required to implement the pattern

Participants—describes the responsibilities of the classes that are required to implement the pattern

Collaborations—describes how the participants collaborate to carry out their responsibilities

Consequences—describes the “design forces” that affect the pattern and the potential trade-offs that must be considered when the pattern is implemented

Related patterns—cross-references related design patterns



Separation of Concerns



- Any complex problem can be more easily handled if it is subdivided into pieces that can each be solved and/or optimized independently
- A *concern* is a feature or behavior that is specified as part of the requirements model for the software
- By separating concerns into smaller, and therefore more manageable pieces, a problem takes less effort and time to solve.



Modularity




- "Modularity is the single attribute of software that allows a program to be intellectually manageable" [Mye78].
- Monolithic software (i.e., a large program composed of a single module) cannot be easily grasped by a software engineer.
 - The number of control paths, span of reference, number of variables, and overall complexity would make understanding close to impossible.
- In almost all instances, you should break the design into many modules, hoping to make understanding easier and as a consequence, reduce the cost required to build the software.
- BUT: Pay attention to integration costs too.




Modularity: Trade-offs

What is the "right" number of modules for a specific software design?

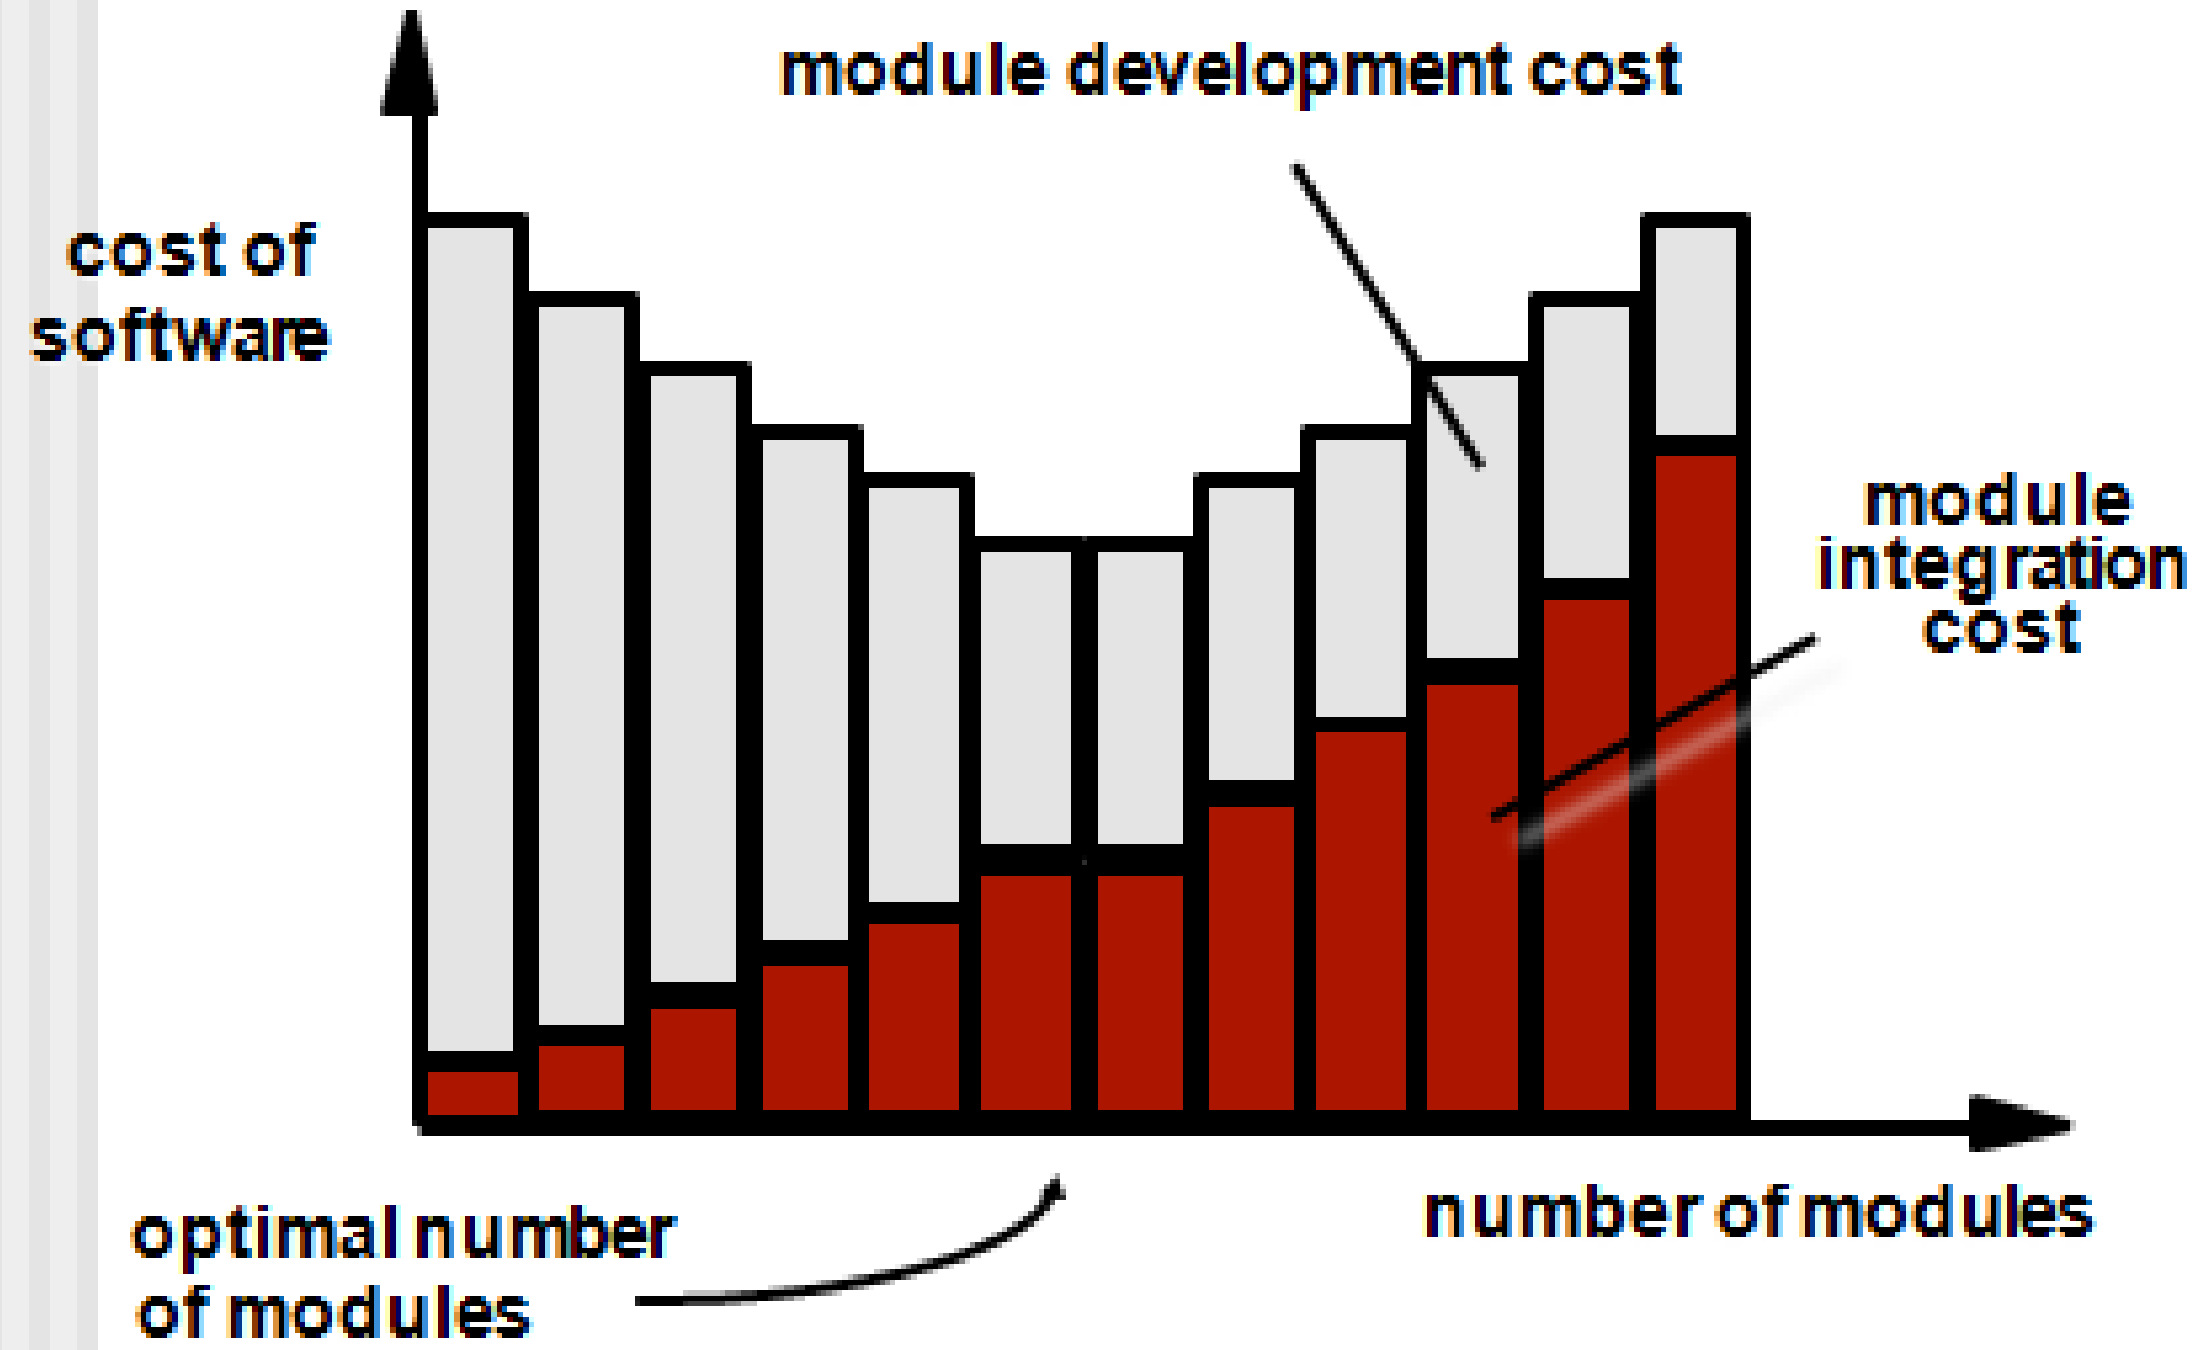

Information Hiding

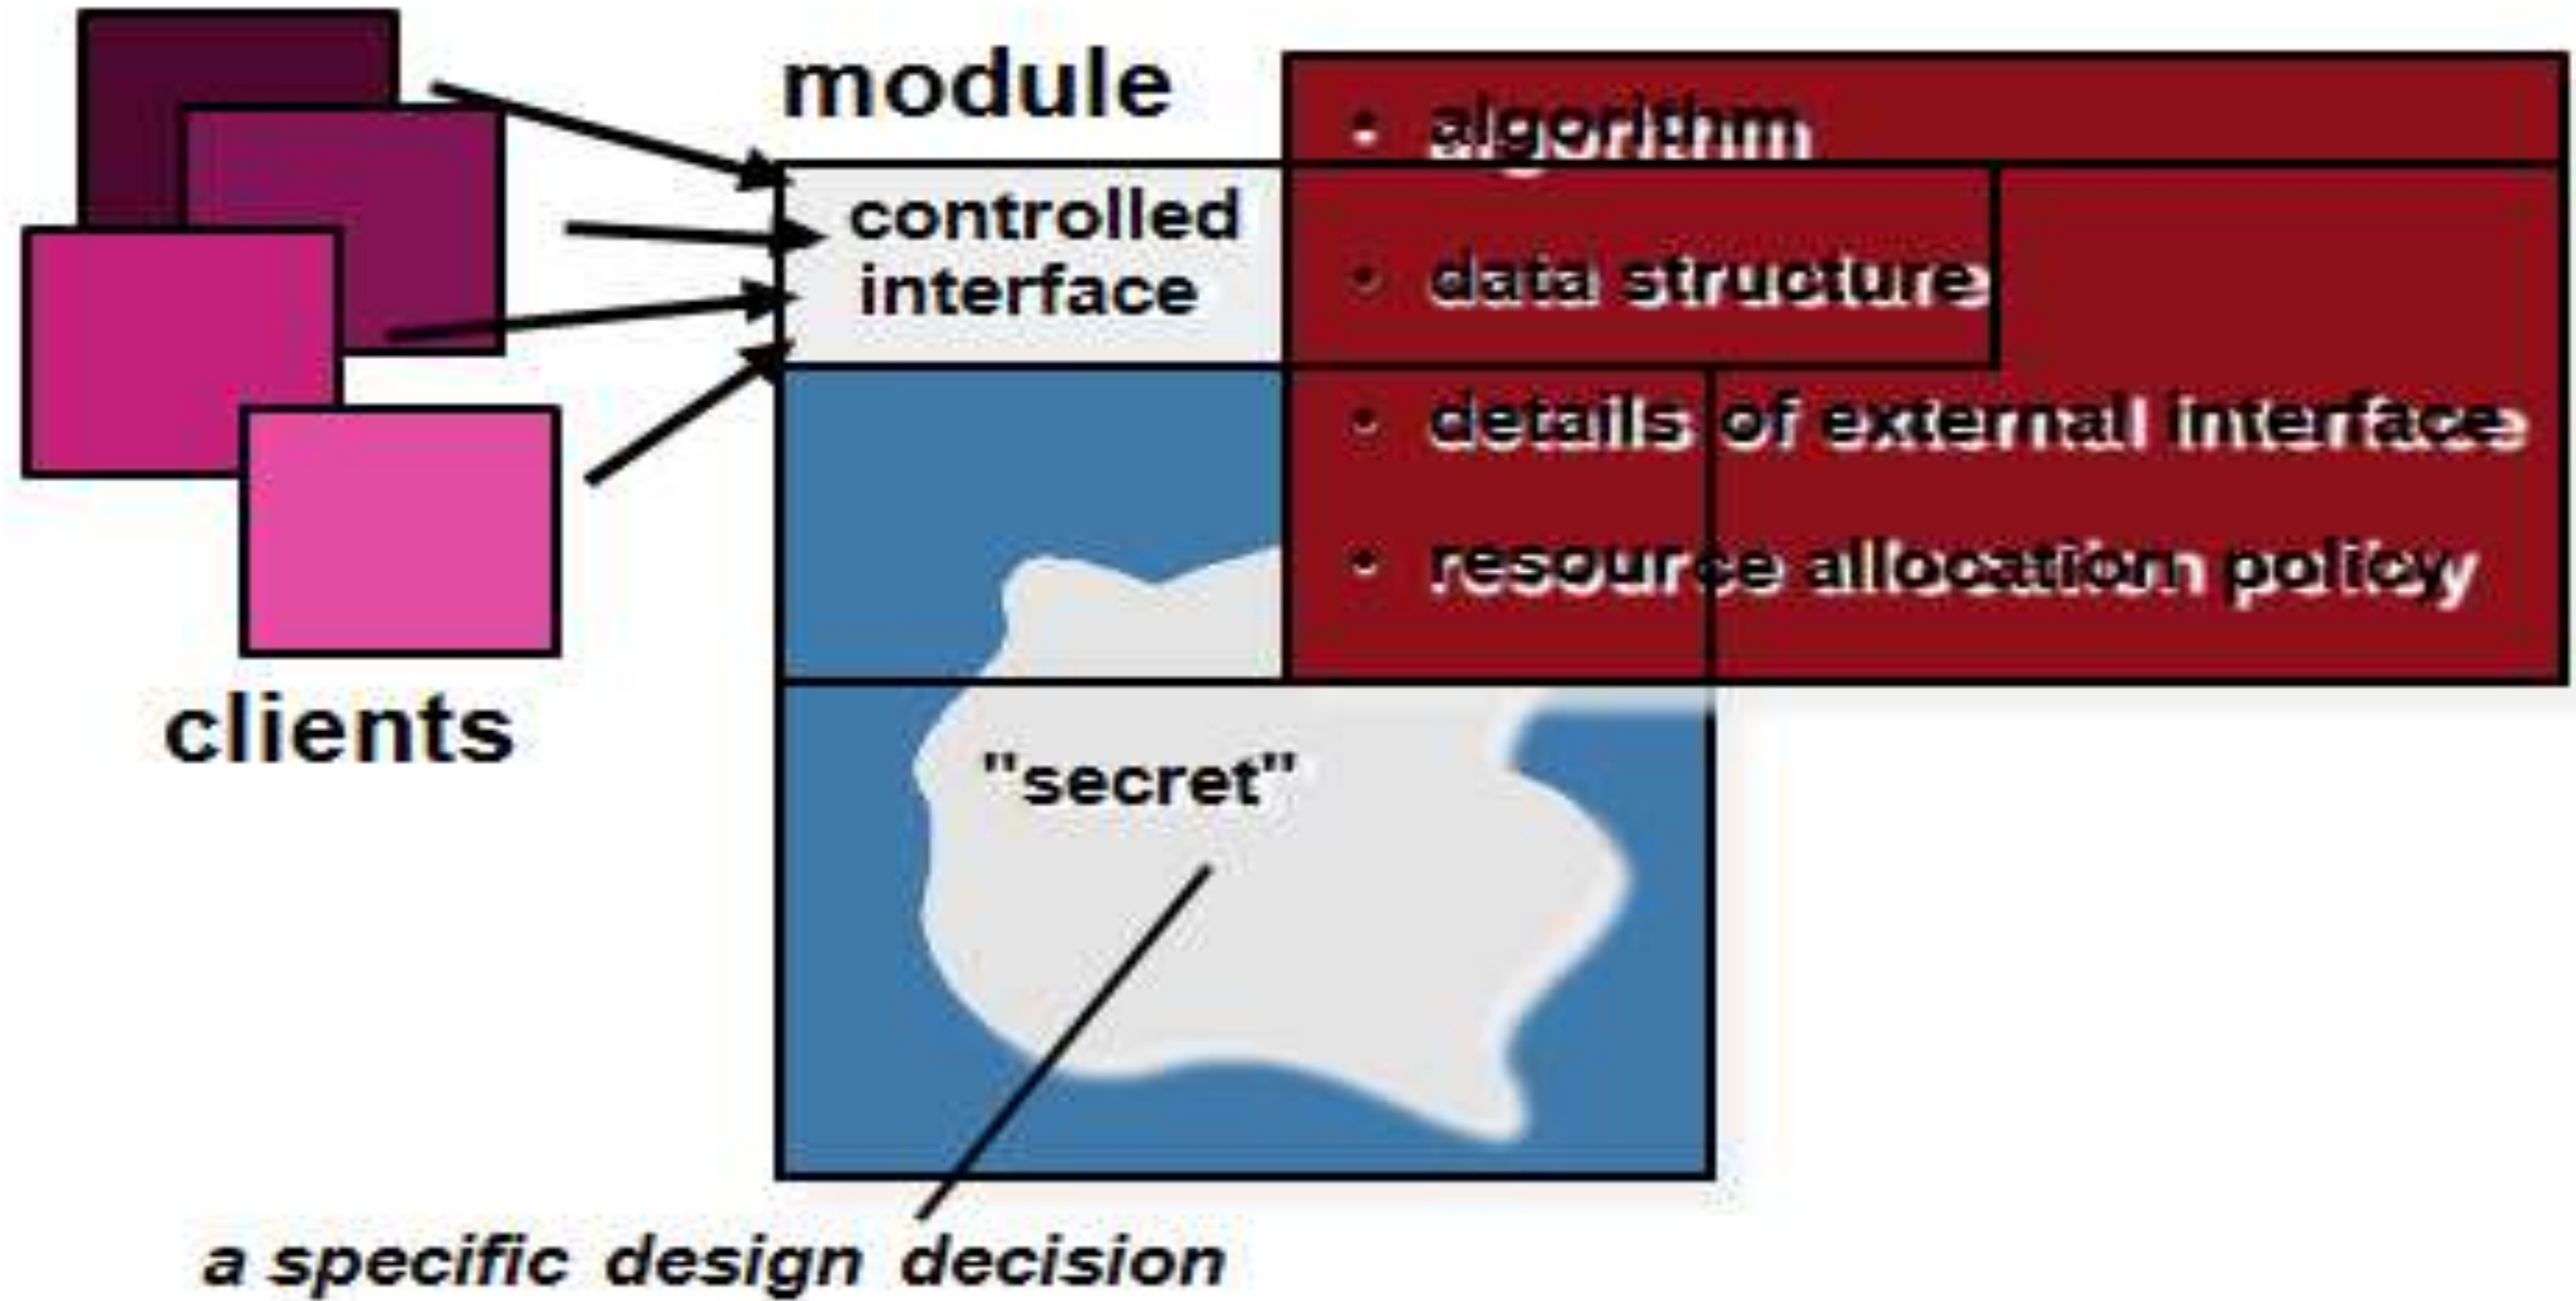



Why Information Hiding?



Modules must be specified and designed so that the information like algorithm and data presented in a module is not accessible for other modules not requiring that information.

- reduces the likelihood of “side effects”
- limits the global impact of local design decisions
- emphasizes communication through controlled interfaces
- discourages the use of global data
- leads to encapsulation—an attribute of high quality design
- results in higher quality software




Functional Independence



- The functional independence is the concept of separation and related to the concept of modularity, abstraction and information hiding.
- *Cohesion* is an indication of the relative functional strength of a module.
 - A cohesive module performs a single task, requiring little interaction with other components in other parts of a program. Stated simply, a cohesive module should (ideally) do just one thing.
- *Coupling* is an indication of the relative interdependence among modules.
 - Coupling depends on the interface complexity between modules, the point at which entry or reference is made to a module, and what data pass across the interface.



Stepwise Refinement

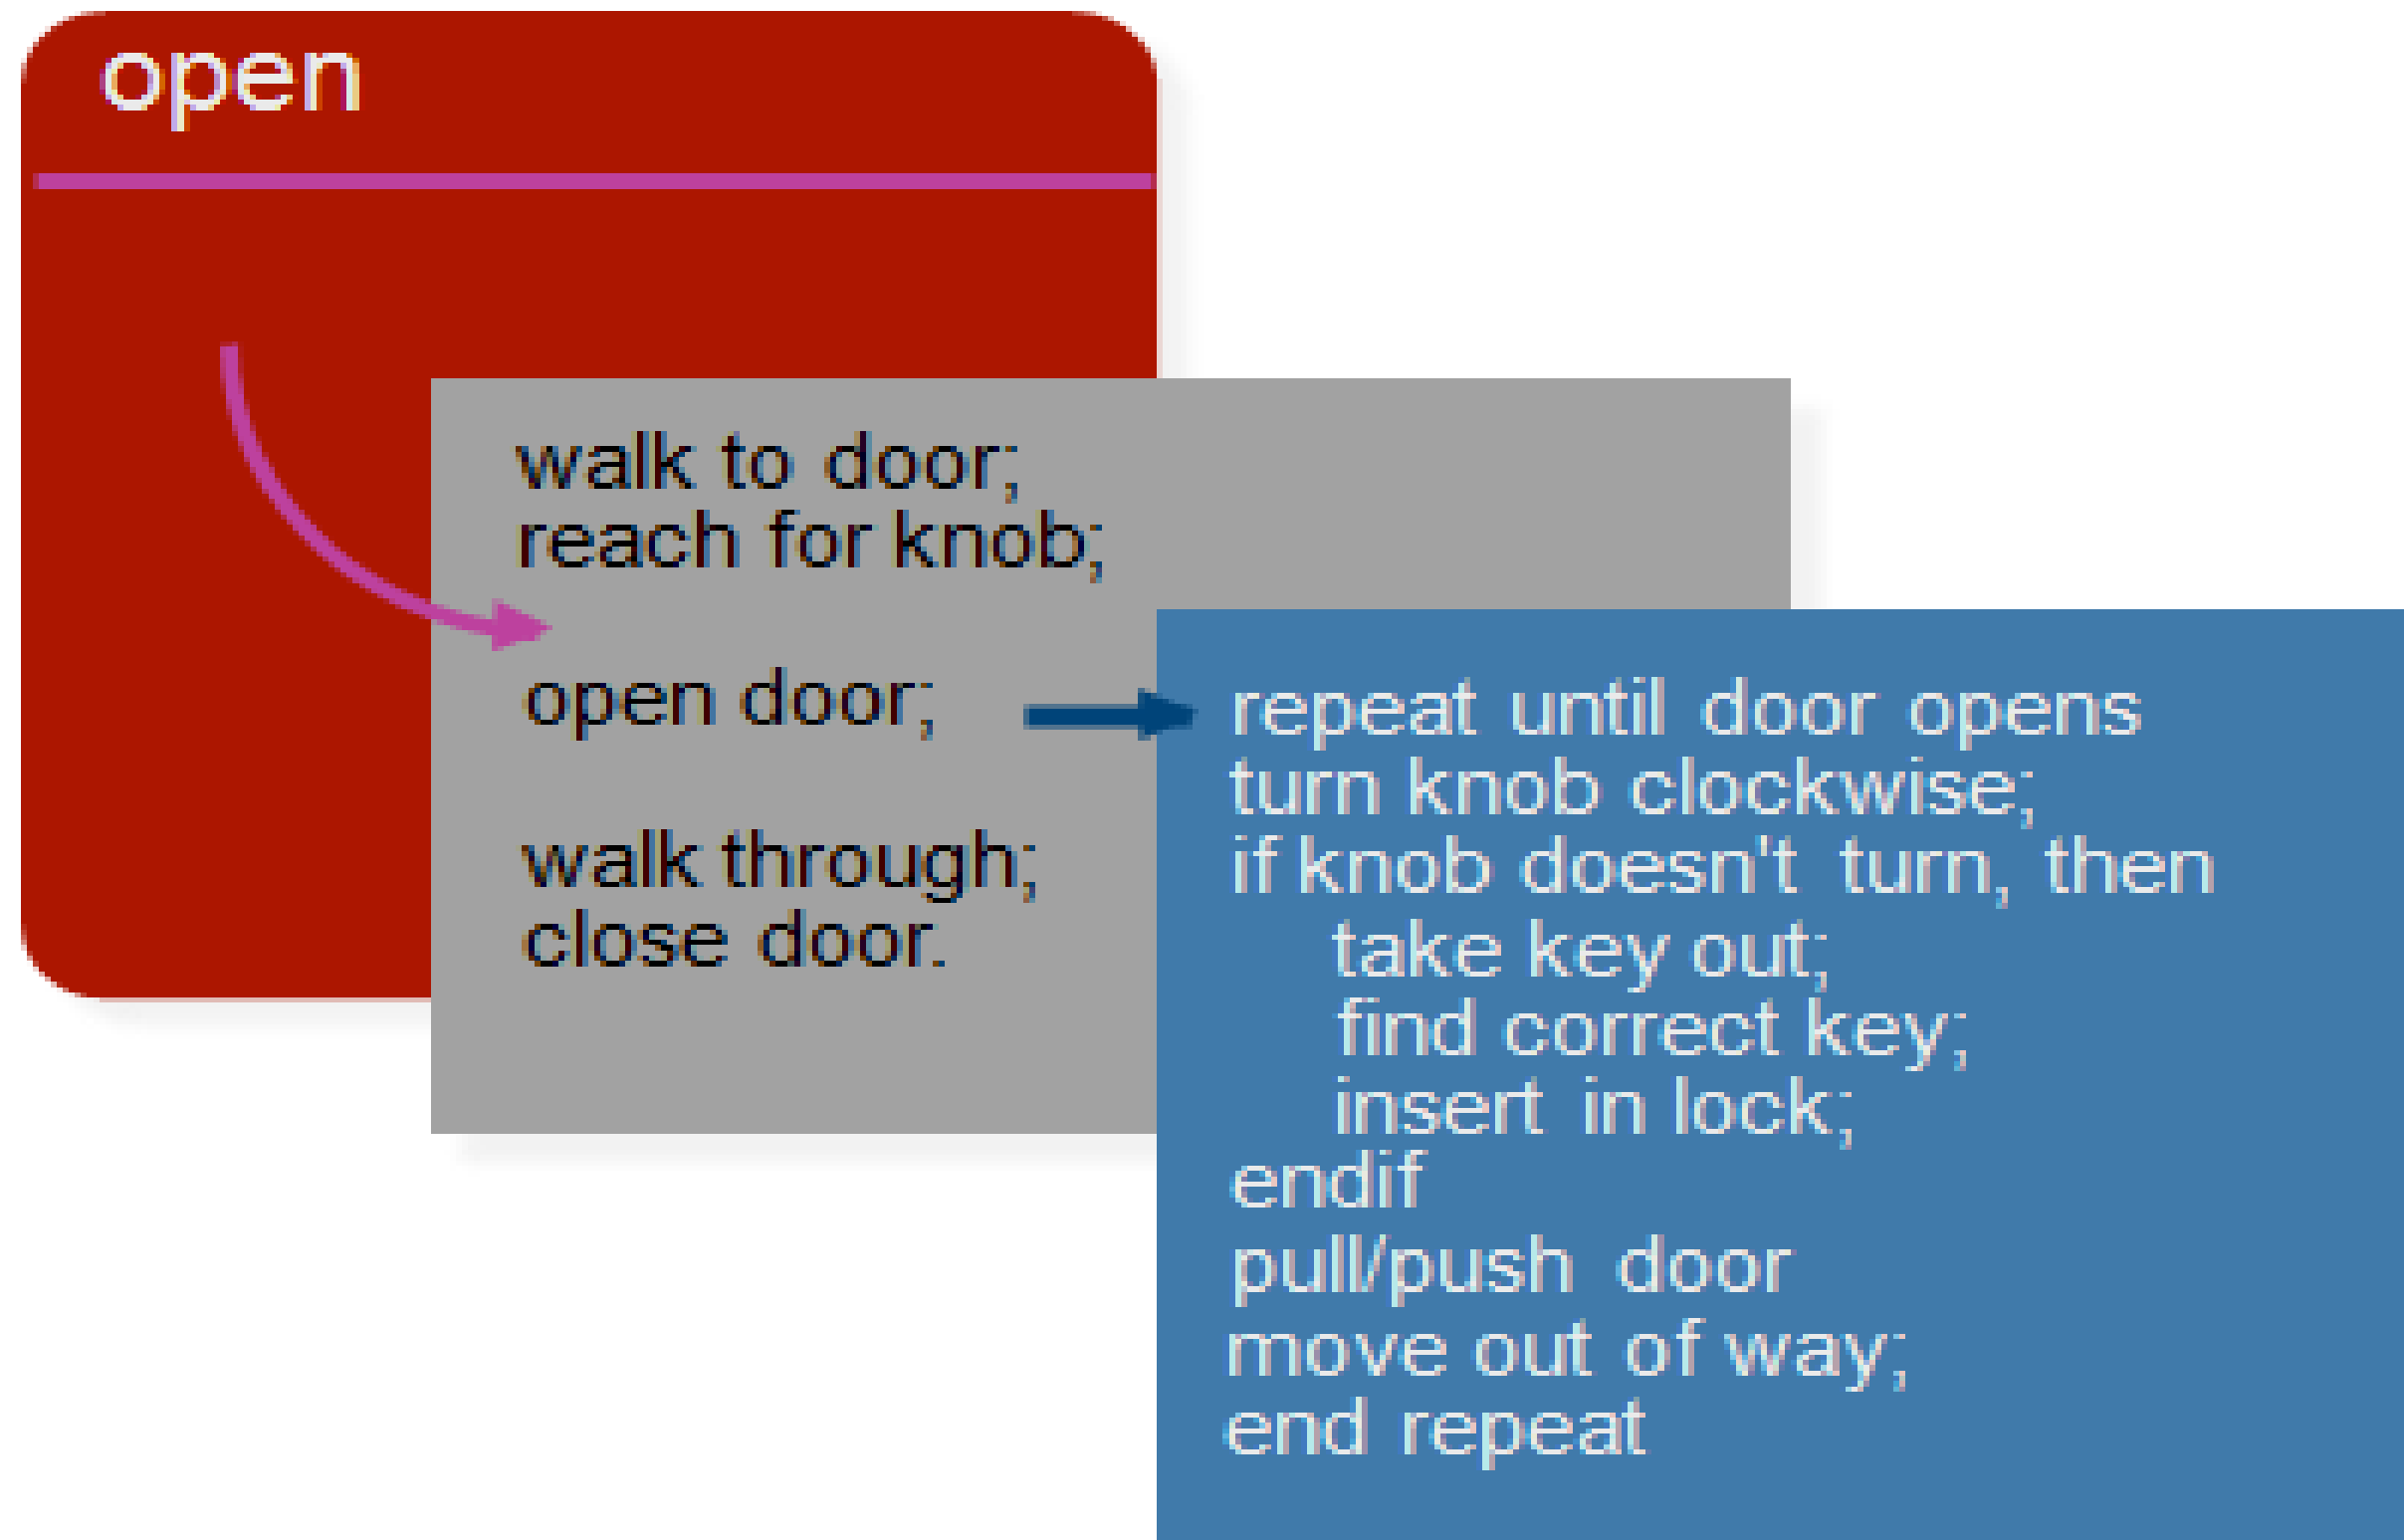



Refactoring



- Fowler [FOW99] defines refactoring in the following manner:
 - "Refactoring is the process of changing a software system in such a way that it does not alter the external behavior of the code [design] yet improves its internal structure."
 - When software is refactored, the existing design is examined for
 - redundancy
 - unused design elements
 - inefficient or unnecessary algorithms
 - poorly constructed or inappropriate data structures
 - or any other design failure that can be corrected to yield a better design.



OO Design Concepts



- **Design classes**
 - Entity classes
 - Boundary classes
 - Controller classes
- **Inheritance**—all responsibilities of a superclass is immediately inherited by all subclasses
- **Messages**—stimulate some behavior to occur in the receiving object
- **Polymorphism**—a characteristic that greatly reduces the effort required to extend the design




Design Classes



- Analysis classes are refined during design to become **entity classes**
- **Boundary classes** are developed during design to create the interface (e.g., interactive screen or printed reports) that the user sees and interacts with as the software is used.
 - Boundary classes are designed with the responsibility of managing the way entity objects are represented to users.
 - **Controller classes** are designed to manage
 - the creation or update of entity objects;
 - the instantiation of boundary objects as they obtain information from entity objects;
 - complex communication between sets of objects;
 - validation of data communicated between objects or between the user and the application.



The Design Model

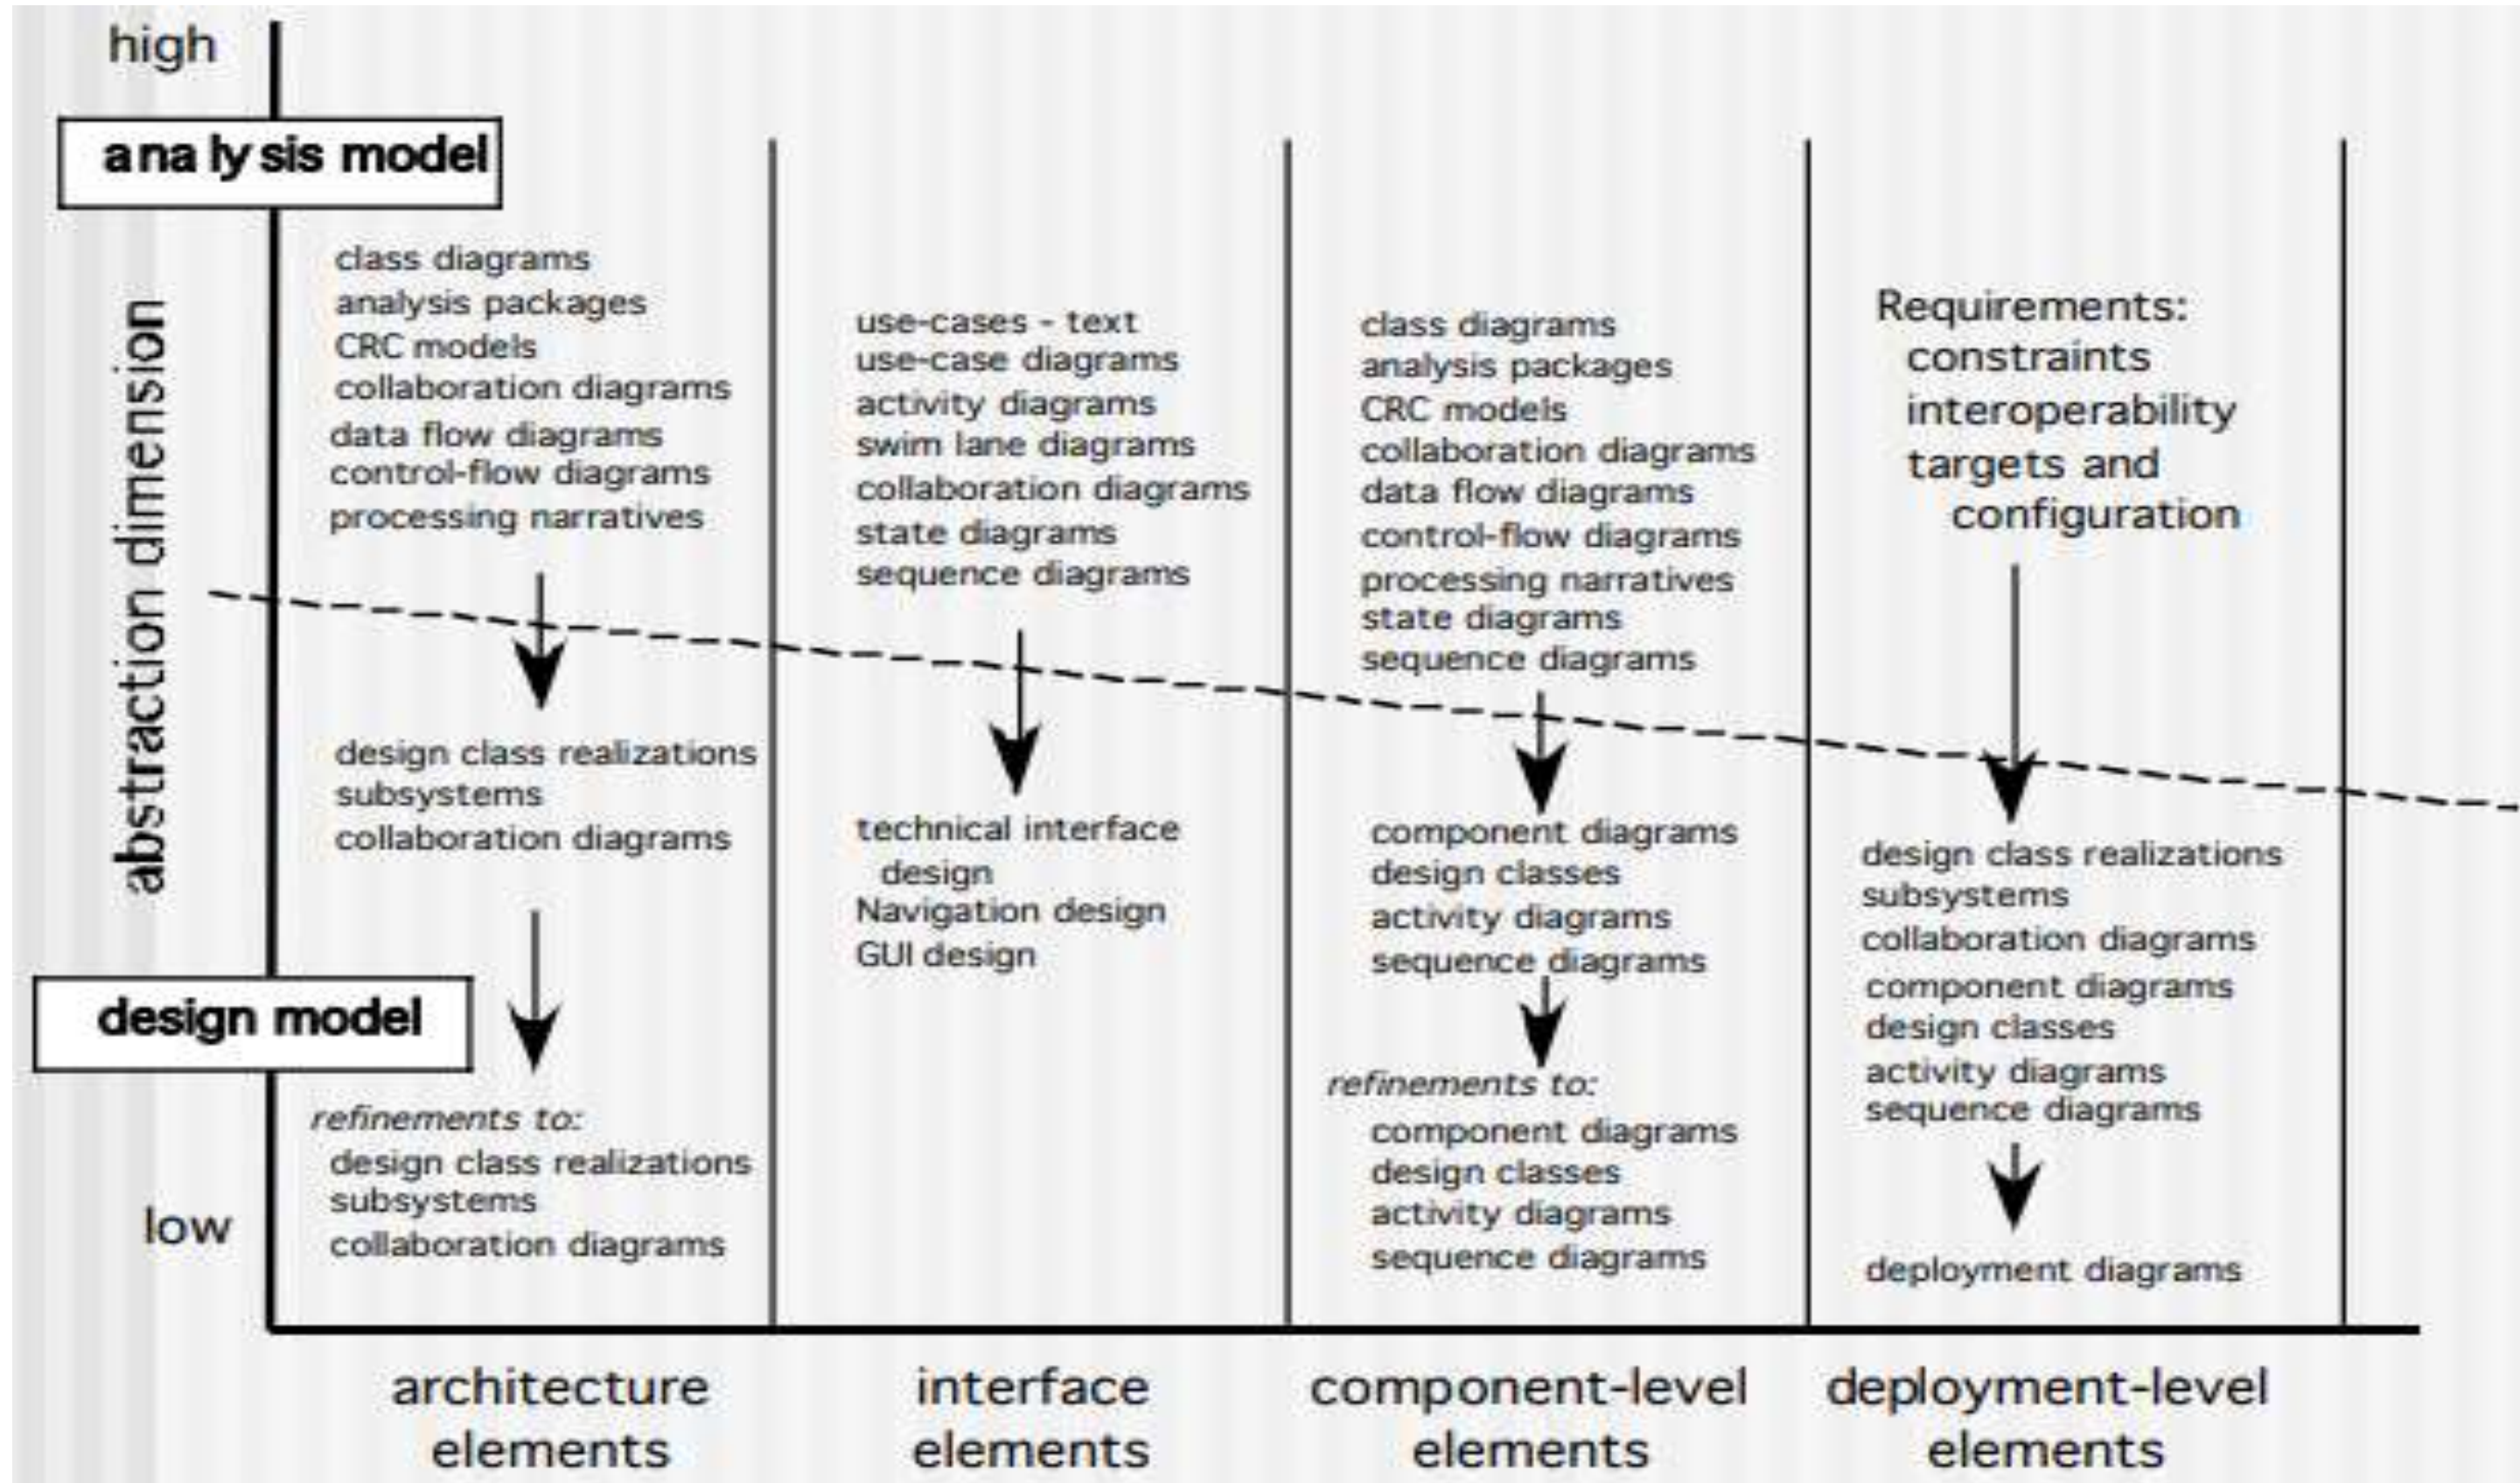



Design Model Elements



Data elements

- Data model --> data structures
- Data model --> database architecture

Architectural elements

- Like floor plan of a house
- Analysis classes, their relationships, collaborations and behaviors are transformed into design realizations
- Patterns and “styles” (Chapters 9 and 12)

Interface elements

- the user interface (UI)
- external interfaces to other systems, devices, networks or other producers or consumers of information
- internal interfaces between various design components.

Component elements

Deployment elements




Architectural Elements



- The architectural model [Sha96] is derived from three sources:
 - **information about the application domain** for the software to be built;
 - **specific requirements model elements** such as data flow diagrams or analysis classes, their relationships and collaborations for the problem at hand, and
 - **the availability of architectural patterns and styles**

Interface Elements

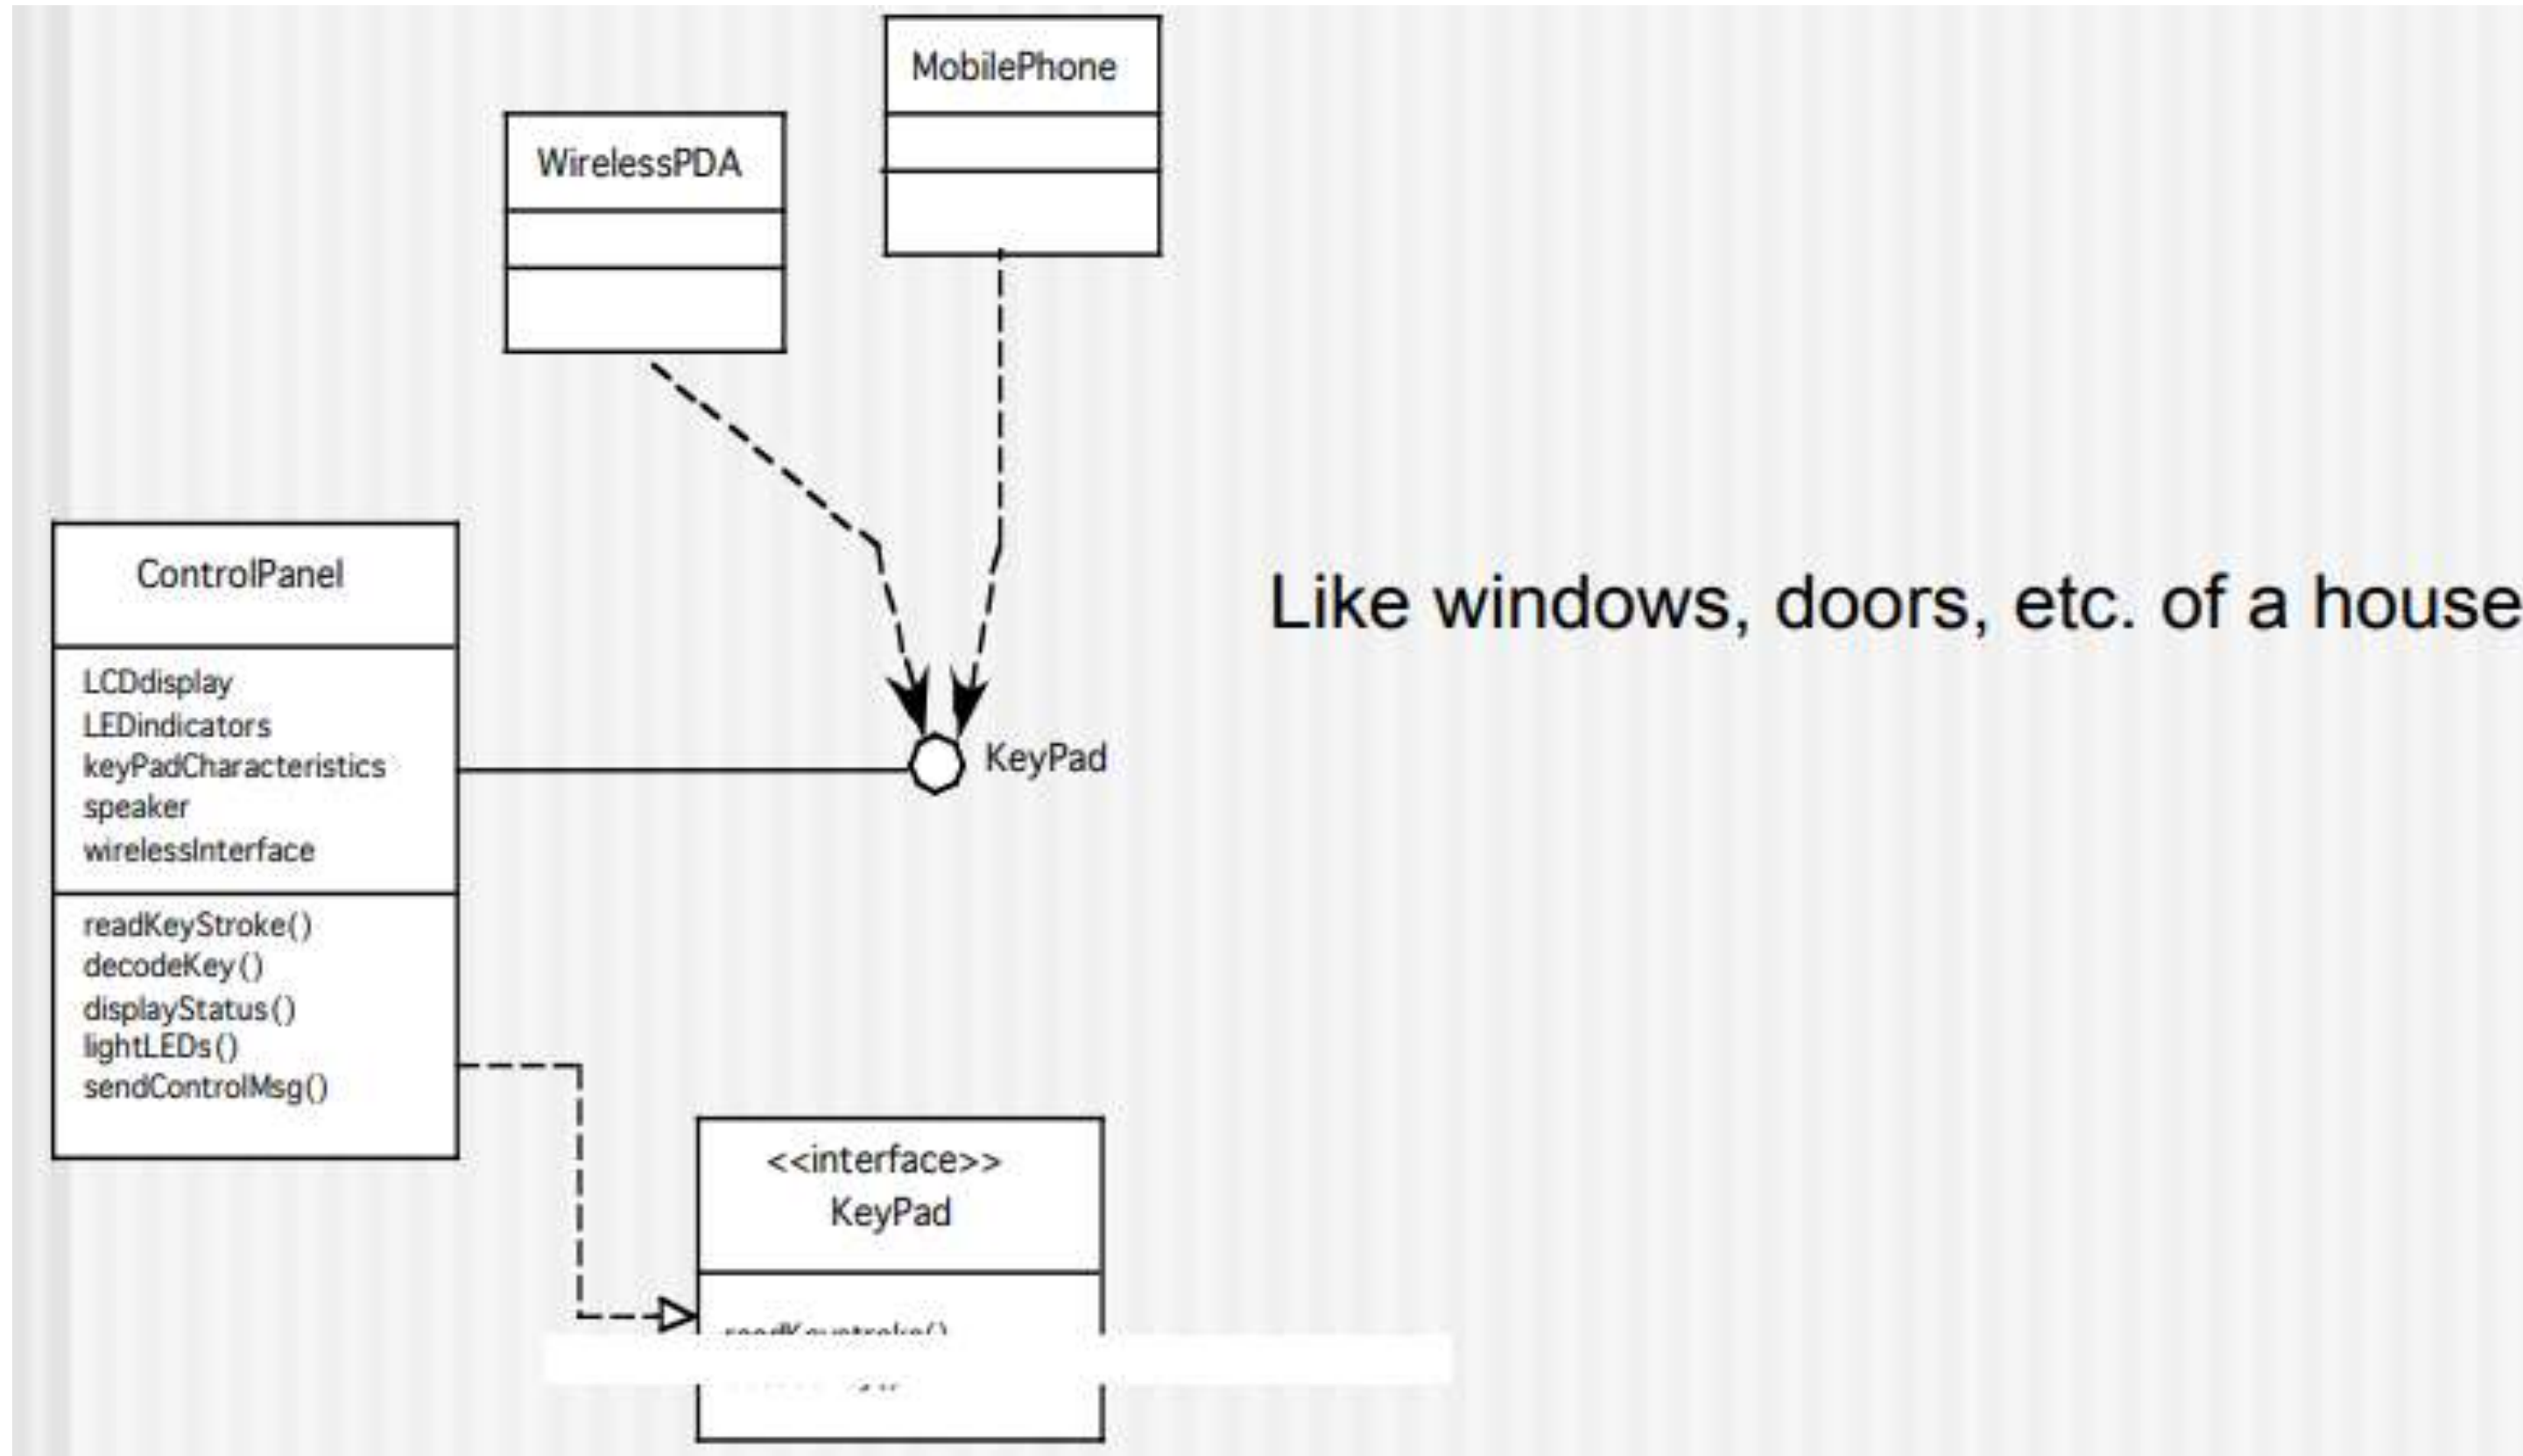




Component Elements




- Specifies the details of components
 - Similar to the plumbing, electrical, details of every room in a floor plan
- SensorManagement performs all functions regarding sensors

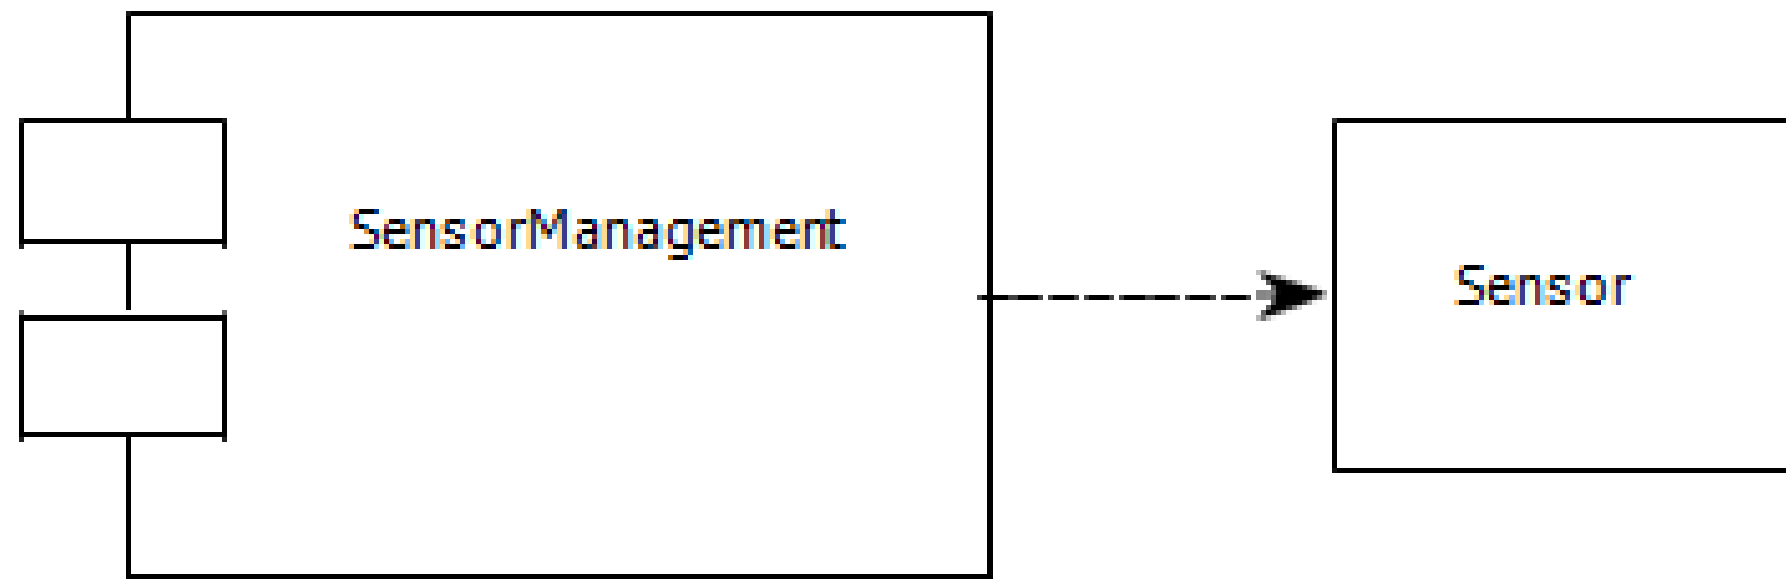

Deployment Elements

- How subsystems will be allocated in the physical environment
- Computing environment but no details about hardware

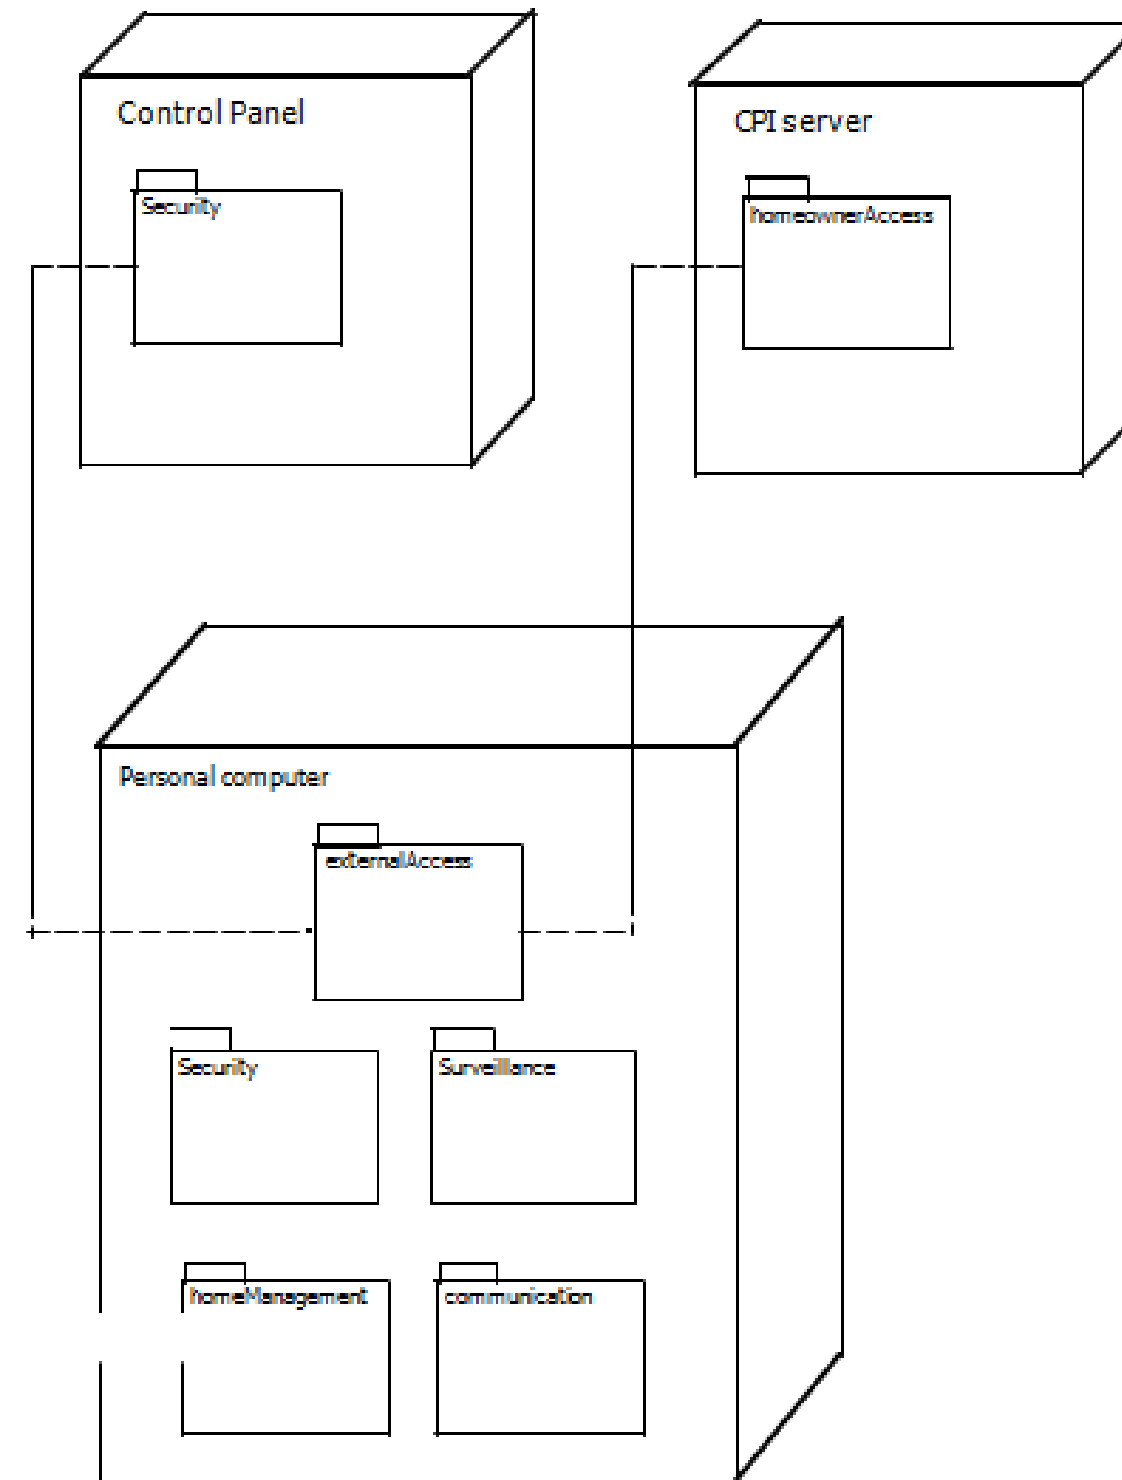



Assessment 1



1. What is Design concepts?

Ans : _____

2. What is Design model?

Ans : _____





References



1. Roger S. Pressman, Software engineering- A practitioner's Approach, 10th Edition, McGraw-Hill, 2017.
2. Ken Schawber, Mike "Agile Software Development with Scrum" Pearson Education, 2nd Edition, 2015.

Thank You