



# SNS COLLEGE OF ENGINEERING

Kurumbapalayam (PO), Coimbatore – 641 107

Accredited by NAAC-UGC with 'A' Grade

Approved by AICTE, Recognized by UGC & Affiliated to Anna University, Chennai

## DEPARTMENT OF ECE

**COURSE NAME: 19IT301 COMPUTER ORGANIZATION**


**AND ARCHITECTURE**

**II YEAR/ III SEM**

**Unit 1 : BASIC STRUCTURE OF COMPUTERS Topic 4:**


**Memory locations and addresses -Memory**

**Operations**



# Memory locations and addresses

- Memory consists of many millions of storage cells, each of which can store 1 bit.
- Data is usually accessed in  $n$ -bit groups.  $n$  is called word length.

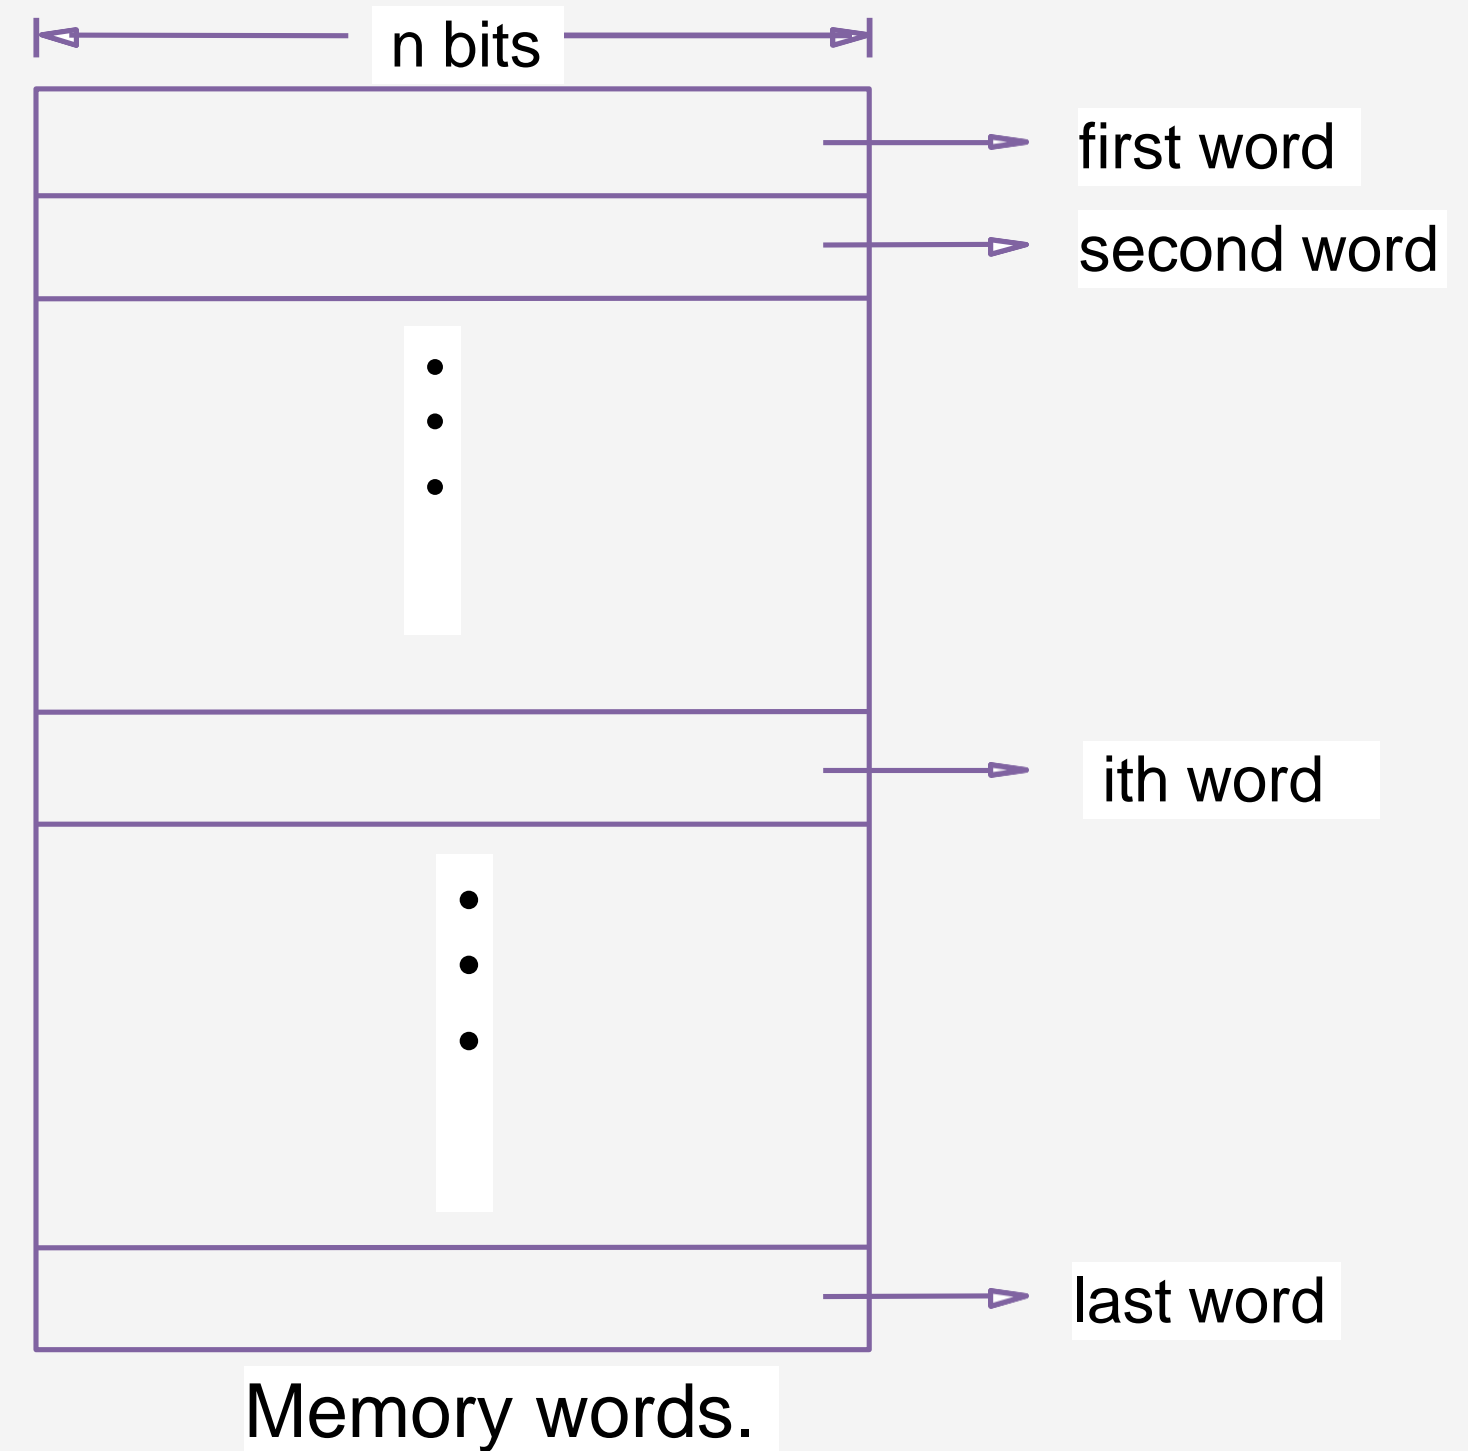




# Example of encoded information in a 32-bit word




## 32-bit word length example

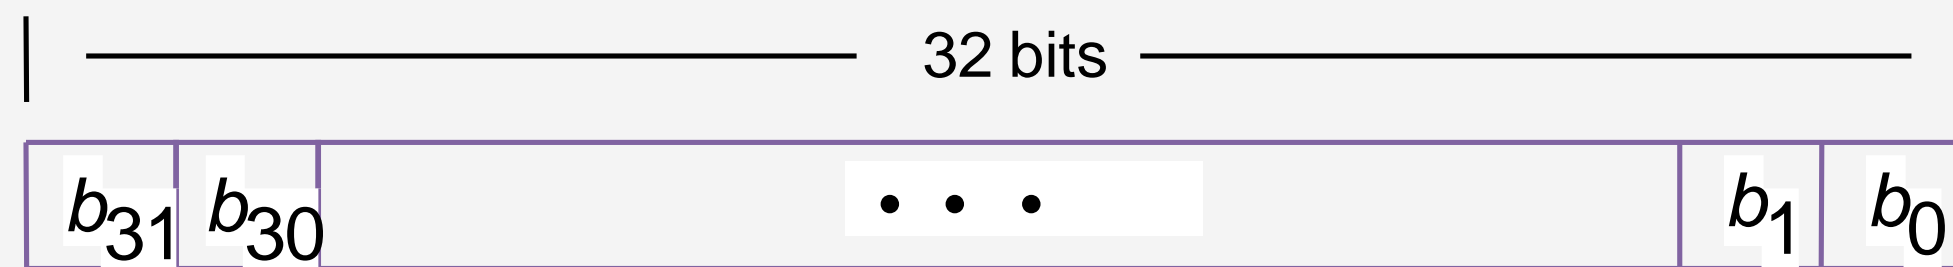

↑ Sign bit:  $b_{31}=0$  for positive numbers  
 $b_{31}=1$  for negative numbers

(a) A signed integer

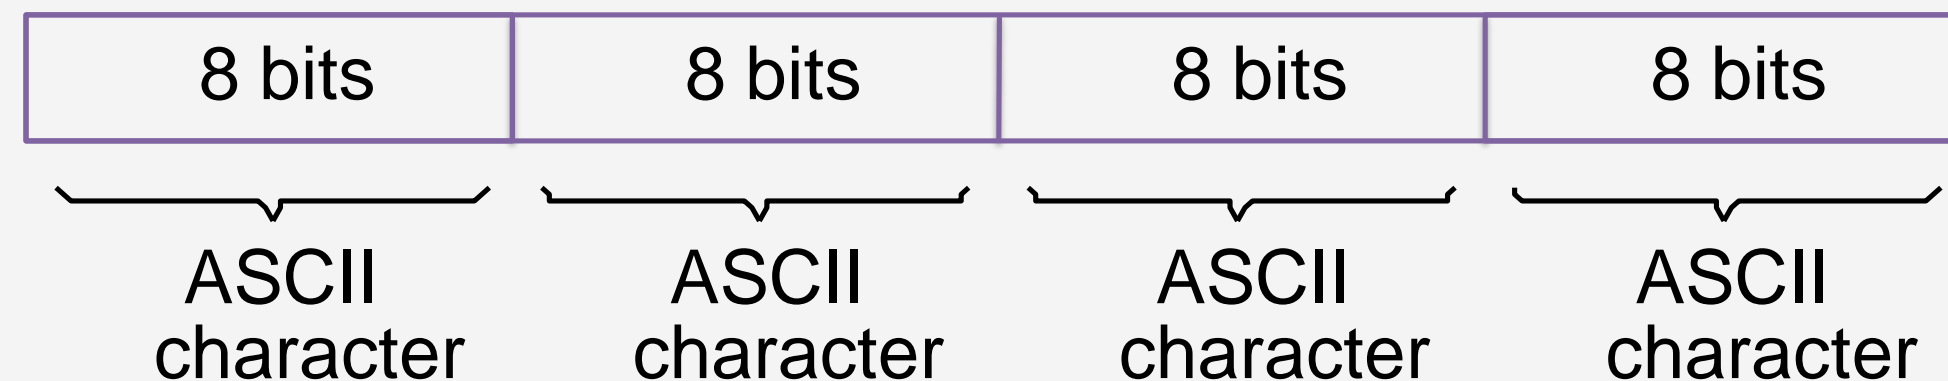

(b) Four characters



# Memory Address


- To retrieve information from memory, either for one word or one byte (8-bit), addresses for each location are needed.
- A k-bit address memory has  $2^k$  memory locations, namely  $0 - 2^k - 1$ , called memory space.
- 24-bit memory:  $2^{24} = 16,777,216 = 16M$  ( $1M = 2^{20}$ )
- 32-bit memory:  $2^{32} = 4G$  ( $1G = 2^{30}$ )
- $1K(\text{kilo}) = 2^{10}$
- $1T(\text{tera}) = 2^{40}$



# Byte Addressability



- It is impractical to assign distinct addresses to individual bit locations in the memory.
- The most practical assignment is to have successive addresses refer to successive byte locations in the memory – *byte-addressable memory*.
- Byte locations have addresses 0, 1, 2, ... If word length is 32 bits, they successive words are located at addresses 0, 4, 8,...




9/30/2023

# Big-Endian and Little-Endian Assignments

2 ways of assigning byte addresses:

**Big-Endian:** lower byte addresses are used for the most significant bytes of the word


**Little-Endian:** opposite ordering. lower byte addresses are used for the less significant bytes of the word

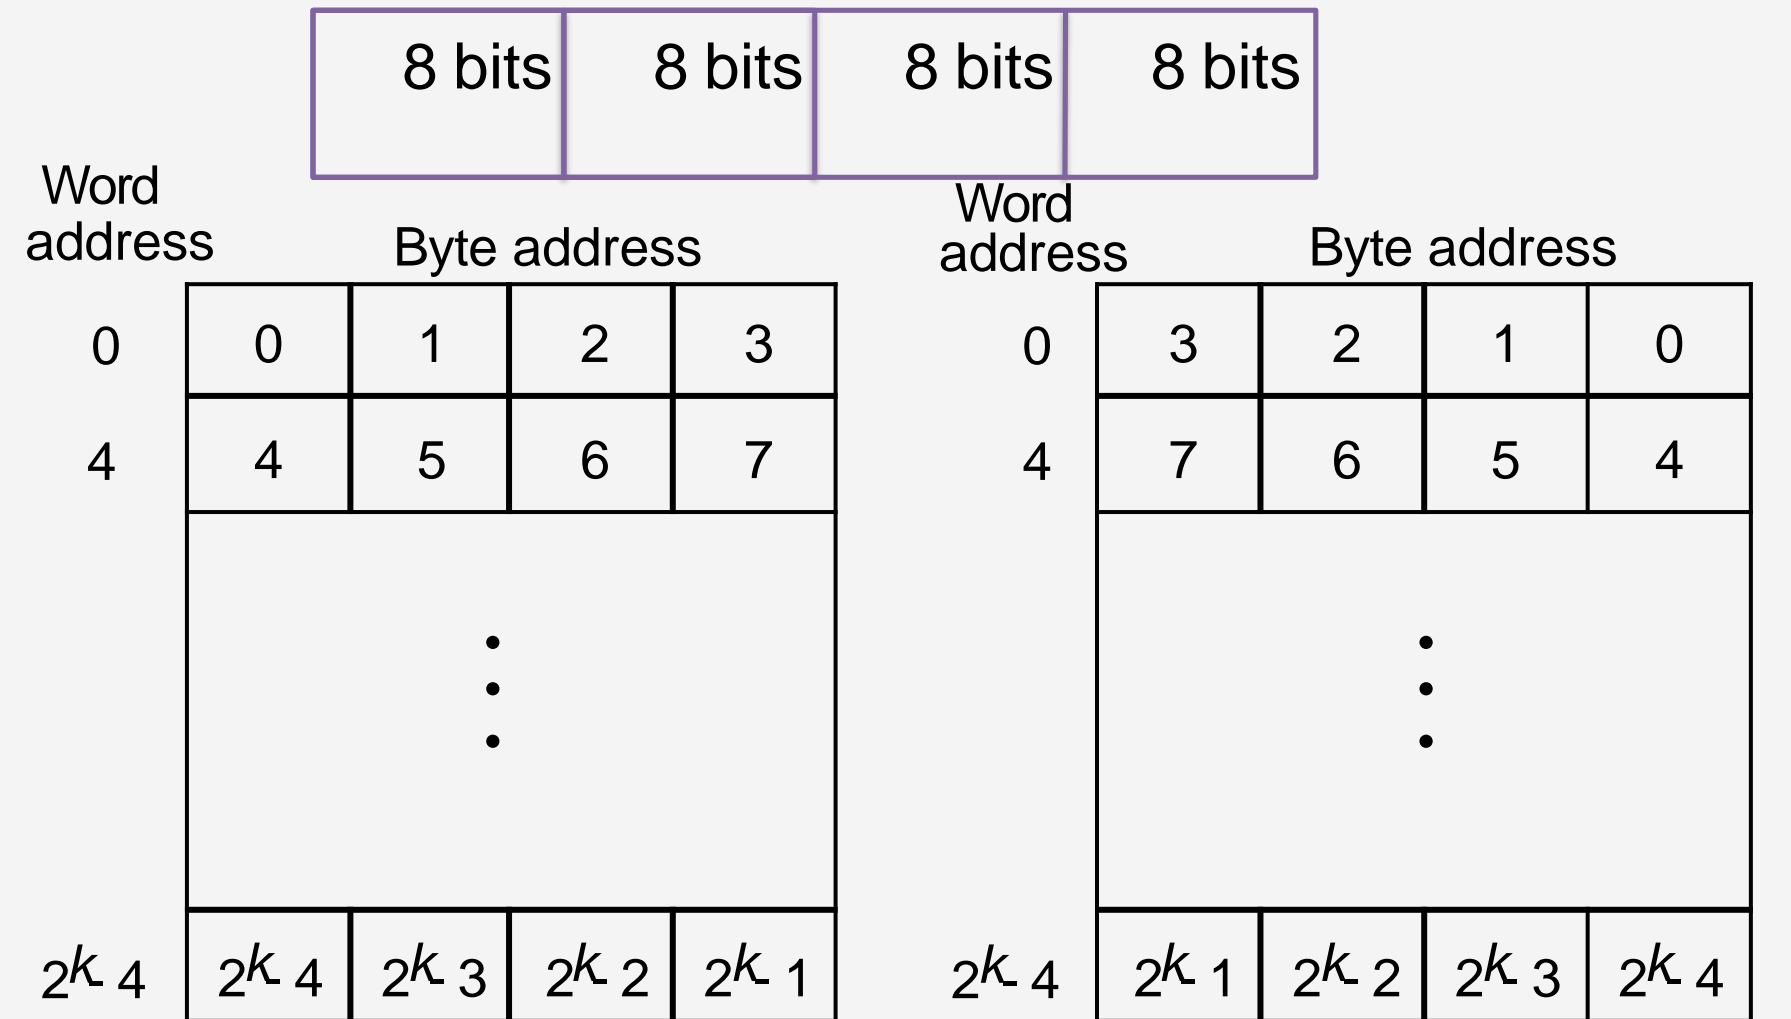

(a) Big-endian assignment


(b) Little-endian assignment

Byte and word addressing.



# Word alignment

- Words are said to be aligned in memory if they begin at a byte addr. that is a multiple of the number of bytes in a word.
  - ✓ 16-bit word: word addresses: 0, 2, 4,.....
  - ✓ 32-bit word: word addresses: 0, 4, 8,.....
  - ✓ 64-bit word: word addresses: 0, 8,16,.....
- Access numbers using word address, individual characters accessed using byte address, and character strings of variable length by indicating 'end of string'



# Memory Operations



- Load (or Read or Fetch)
  - Copy the content. The memory content doesn't change.
  - Address – Load
  - Registers can be used
- Store (or Write)
  - Overwrite the content in memory
  - Address and Data – Store
  - Registers can be used







# Assessment



1. The smallest entity of memory is called \_\_\_\_\_

- a) Cell
- b) Block
- c) Instance
- d) Unit

2. The collection of the above mentioned entities where data is stored is called \_\_\_\_\_

- a) Block
- b) Set
- c) Word
- d) Byte



9/30/2023



# Assessment



3. An 24 bit address generates an address space of \_\_\_\_\_ locations.

- a) 1024
- b) 4096
- c) 248
- d) 16,777,216

4. If a system is 64 bit machine, then the length of each word will be \_\_\_\_\_

- a) 4 bytes
- b) 8 bytes
- c) 16 bytes
- d) 12 bytes




9/30/2023



# Assessment



5. When using the Big Endian assignment to store a number, the sign bit of the number is stored in \_\_\_\_\_
- a) The higher order byte of the word
  - b) The lower order byte of the word
  - c) Can't say
  - d) None of the mentioned



9/30/2023



Thank You