



SNS COLLEGE OF TECHNOLOGY

Coimbatore – 35

An Autonomous Institution

Accredited by NBA – AICTE and Accredited by NAAC – UGC with ‘A+’ Grade

Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai



DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING

16EC401 / Wireless Communication

IV ECE/ VII SEMESTER

Unit IV - **MULTIPATH MITIGATION TECHNIQUES**

Topic 1 : Equalization



Introduction



- Three techniques are used independently or in tandem to improve receiver signal quality
- *Equalization* compensates for ISI created by multipath with time dispersive channels ($W > B_C$)
 - Linear equalization, nonlinear equalization
 - counters the effects of time dispersion (ISI)
- *Diversity* also compensates for fading channel impairments.
 - Implemented by using two or more receiving antennas
 - Spatial diversity, antenna polarization diversity, frequency diversity, time diversity
 - Reduces the depth and duration of the fades experienced by a receiver in a flat fading (narrowband) channel



Introduction

- *Channel Coding* improves mobile communication link performance by adding redundant data bits in the transmitted message
 - Channel coding is used by the Rx to detect or correct errors introduced by the channel (Post detection technique)
 - Block code and convolutional code



Equalization Techniques

- ✓ The term *equalization* can be used to describe any signal processing operation that minimizes ISI
- ✓ Two operation modes for an adaptive equalizer
 - Training and tracking
- ✓ Known, fixed-length training sequence is sent by the transmitter
- ✓ The training sequence is typically a pseudorandom binary signal or a fixed, prescribed bit pattern
- ✓ Immediately following this training sequence, the user data is sent



Adaptive Equalisation

- The adaptive equalizer at the receiver utilizes a recursive algorithm to evaluate the channel
- Estimate filter coefficients to compensate for the channel
- As user data are received, the adaptive algorithm of the equalizer tracks the changing channel
- As a consequence, the adaptive equalizer is continually changing its filter characteristics over time



Activity



- Imagine folding a paper in half once
- Then take the result and fold it in half again; and so on
- How many times can you do that?




Adaptive Equalisation

- ✓ Three factors affect the time spanning over which an equalizer converges:
 - Equalizer algorithm
 - Equalizer structure
 - Time rate of change of the multipath radio channel
- ✓ TDMA wireless systems are particularly well suited for equalizers



Adaptive Equalisation

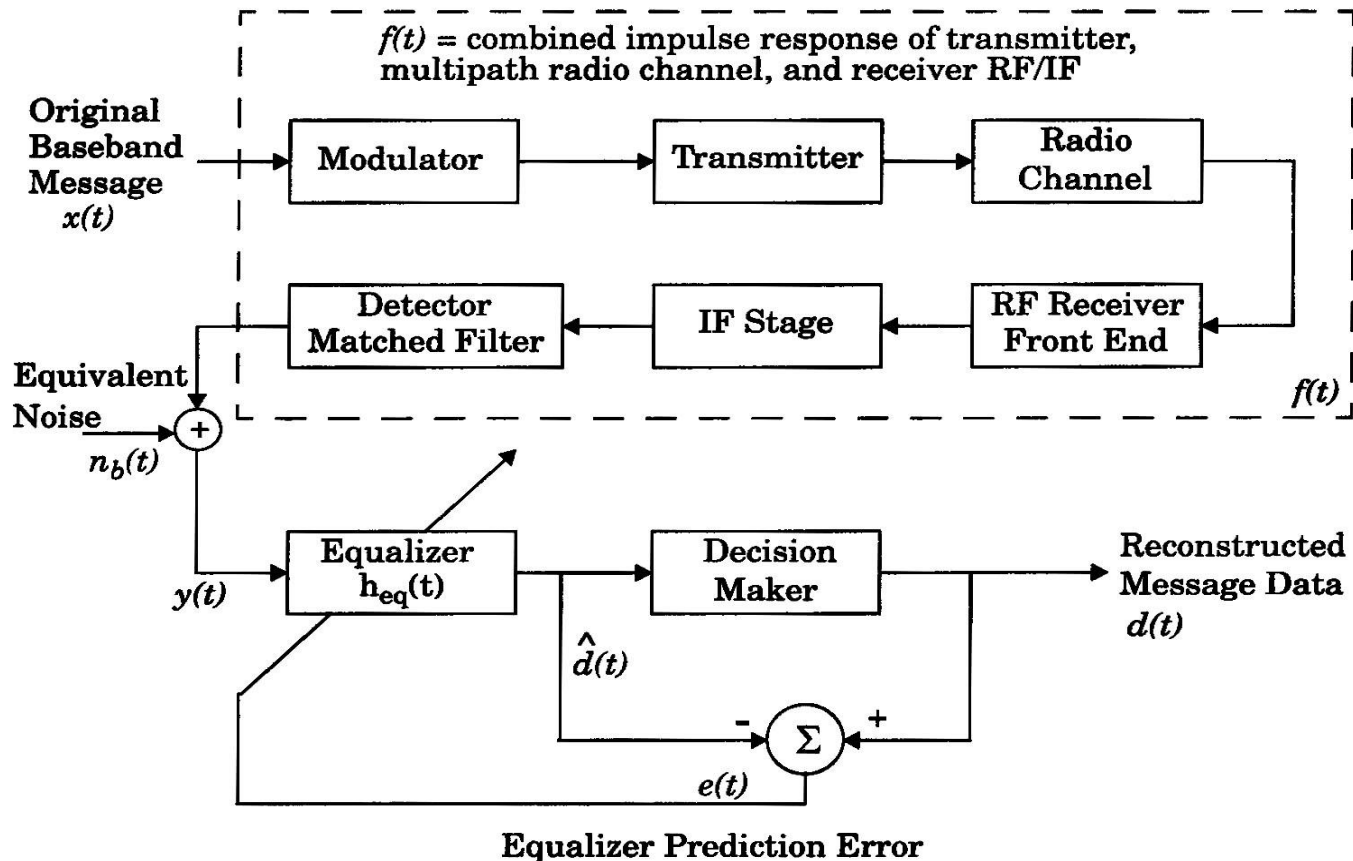

Block diagram of a simplified communications system using an adaptive equalizer at the receiver.



Adaptive Equalisation

The output of equaliser

$$\begin{aligned}\hat{d}(t) &= x(t) \otimes f^*(t) \otimes h_{eq}(t) + n_b(t) \otimes h_{eq}(t) \\ &= x(t) \otimes g(t) + n_b(t) \otimes h_{eq}(t)\end{aligned}$$

- $x(t)$ is the original information signal
- $f(t)$ is the combined complex baseband impulse response of the transmitter, channel and the RF/IF sections of the receiver
- $f^*(t)$ is the complex conjugate of $f(t)$
- $n_b(t)$ is the baseband noise at the input of the equalizer
- \otimes denotes the convolution operation
- $h_{eq}(t)$ is impulse response of the equalizer



Adaptive Equalisation

The desired output of equaliser

$$\hat{d}(t) = x(t)$$

To get this

$$g(t) = f^*(t) \otimes h_{eq}(t) = \delta(t)$$

Goal of equalisation is satisfy the above equation.

In Frequency domain,

$$H_{eq}(f) F^*(-f) = 1$$




Adaptive Equalization

- If the channel is frequency selective, the equalizer enhances the frequency components with small amplitudes and attenuates the strong frequencies in the received frequency response
- For a time-varying channel, an adaptive equalizer is needed to track the channel variations



Basic Structure of Adaptive Equalizer

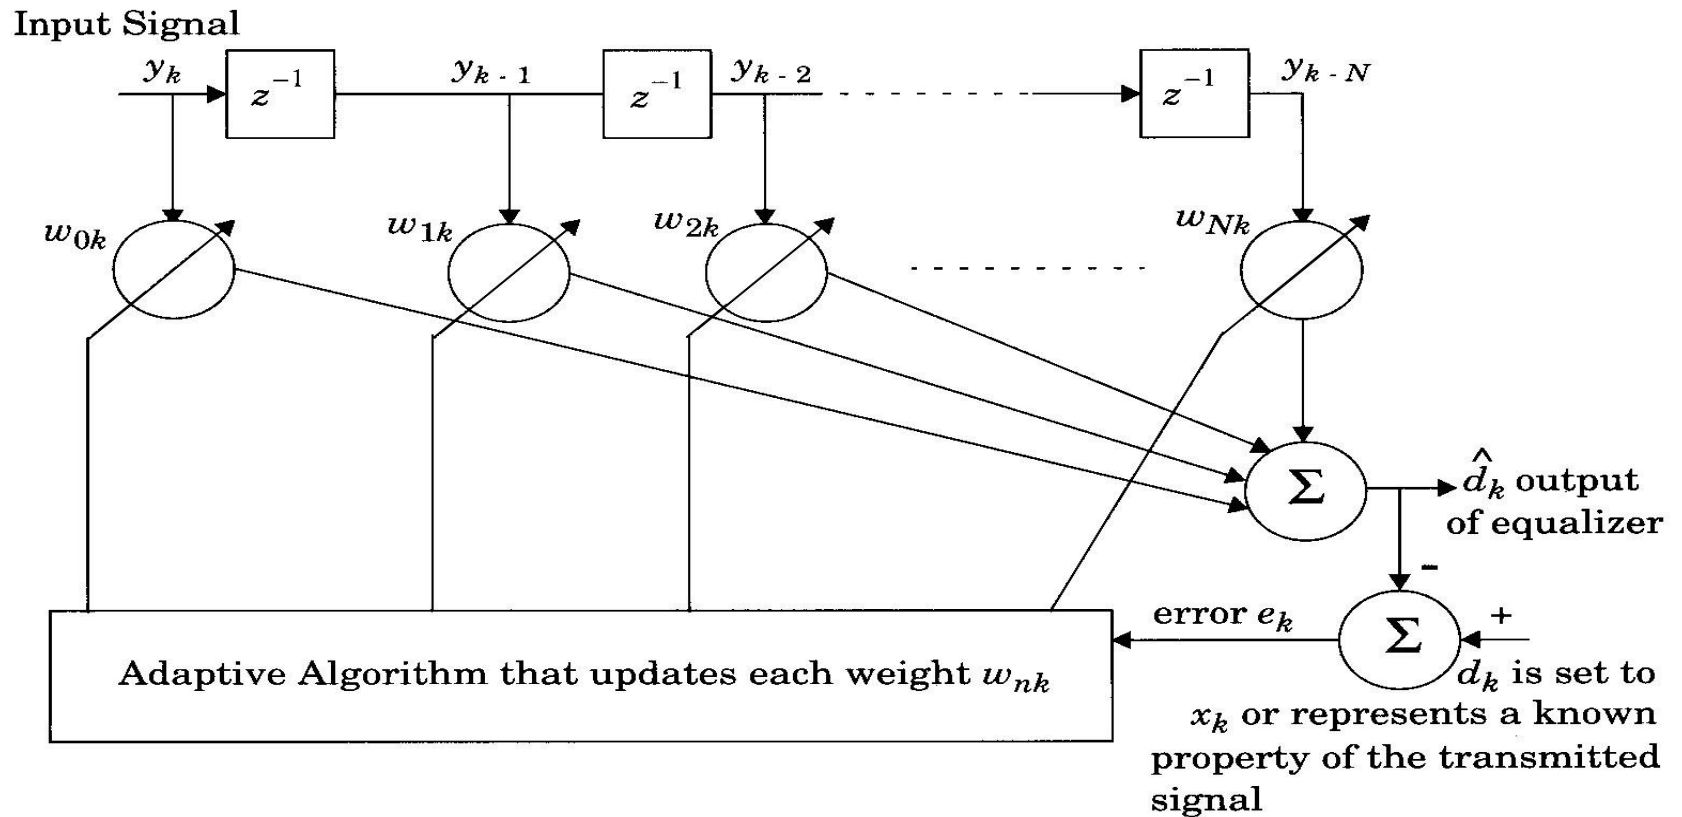

A basic linear equalizer during training.



Basic Structure of Adaptive Equalizer

- Transversal filter with N delay elements, $N+1$ taps, and $N+1$ tunable complex weights
- These weights are updated continuously by an adaptive algorithm
- The adaptive algorithm is controlled by the error signal e_k

$$e_k = \hat{d}_k - d_k$$



Basic Structure of Adaptive Equalizer

- Classical equalization theory : using training sequence to minimize the cost function

$$E[e(k) e^*(k)]$$

- Recent techniques for adaptive algorithm : blind algorithms
 - Constant Modulus Algorithm (CMA, used for constant envelope modulation)
 - Spectral Coherence Restoral Algorithm (SCORE, exploits spectral redundancy or cyclostationarity in the Tx signal)



Assessment



➤ **What are the modes of adaptive equalizer?**

- a) Training mode
- b) Tracking mode
- c) **Both of the mentioned**
- d) None of the mentioned

➤ **The ISI and adjacent channel interference is removed by**

- a) Cancelling filter
- b) Port processing equalizer
- c) **Both of the mentioned**
- d) None of the mentioned





THANK YOU