

# Unit II – Relational Model

**Relational Data Model - keys, referential integrity and foreign keys**, Relational Algebra - SQL fundamentals- Introduction, data definition in SQL, table, key and foreign key definitions, update behaviors-Intermediate SQL-Advanced SQL features - Embedded SQL- Dynamic SQL, CASE Studies- Oracle: Database Design and Querying Tools; SQL Variations and Extensions



# Example of a *Instructor* Relation

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
10101	Srinivasan	Comp. Sci.	65000
12121	Wu	Finance	90000
15151	Mozart	Music	40000
22222	Einstein	Physics	95000
32343	El Said	History	60000
33456	Gold	Physics	87000
45565	Katz	Comp. Sci.	75000
58583	Califieri	History	62000
76543	Singh	Finance	80000
76766	Crick	Biology	72000
83821	Brandt	Comp. Sci.	92000
98345	Kim	Elec. Eng.	80000

attributes  
(or columns)

tuples  
(or rows)

# Relation Schema and Instance

- $A_1, A_2, \dots, A_n$  are *attributes*
- $R = (A_1, A_2, \dots, A_n)$  is a *relation schema*

Example:

*instructor* = (*ID, name, dept\_name, salary*)

- A relation instance  $r$  defined over schema  $R$  is denoted by  $r(R)$ .
- The current values a relation are specified by a table
- An element  $t$  of relation  $r$  is called a *tuple* and is represented by a *row* in a table

# Attributes

- The set of allowed values for each attribute is called the **domain** of the attribute
- Attribute values are (normally) required to be **atomic**; that is, indivisible
- The special value ***null*** is a member of every domain. Indicated that the value is “unknown”
- The null value causes complications in the definition of many operations

# Relations are Unordered

- Order of tuples is irrelevant (tuples may be stored in an arbitrary order)
- Example: *instructor* relation with unordered tuples

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califieri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000


# Database Schema

- Database schema -- is the logical structure of the database.
- Database instance -- is a snapshot of the data in the database at a given instant in time.
- Example:
  - schema: *instructor (ID, name, dept\_name, salary)*
  - Instance:

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califieri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000

# Keys

- Let  $K \subseteq R$
- $K$  is a **superkey** of  $R$  if values for  $K$  are sufficient to identify a unique tuple of each possible relation  $r(R)$ 
  - Example:  $\{ID\}$  and  $\{ID, name\}$  are both superkeys of *instructor*.
- Superkey  $K$  is a **candidate key** if  $K$  is minimal  
Example:  $\{ID\}$  is a candidate key for *Instructor*
- One of the candidate keys is selected to be the **primary key**.
  - Which one?
- **Foreign key** constraint: Value in one relation must appear in another
  - **Referencing** relation
  - **Referenced** relation
  - Example: *dept\_name* in *instructor* is a foreign key from *instructor* referencing *department*

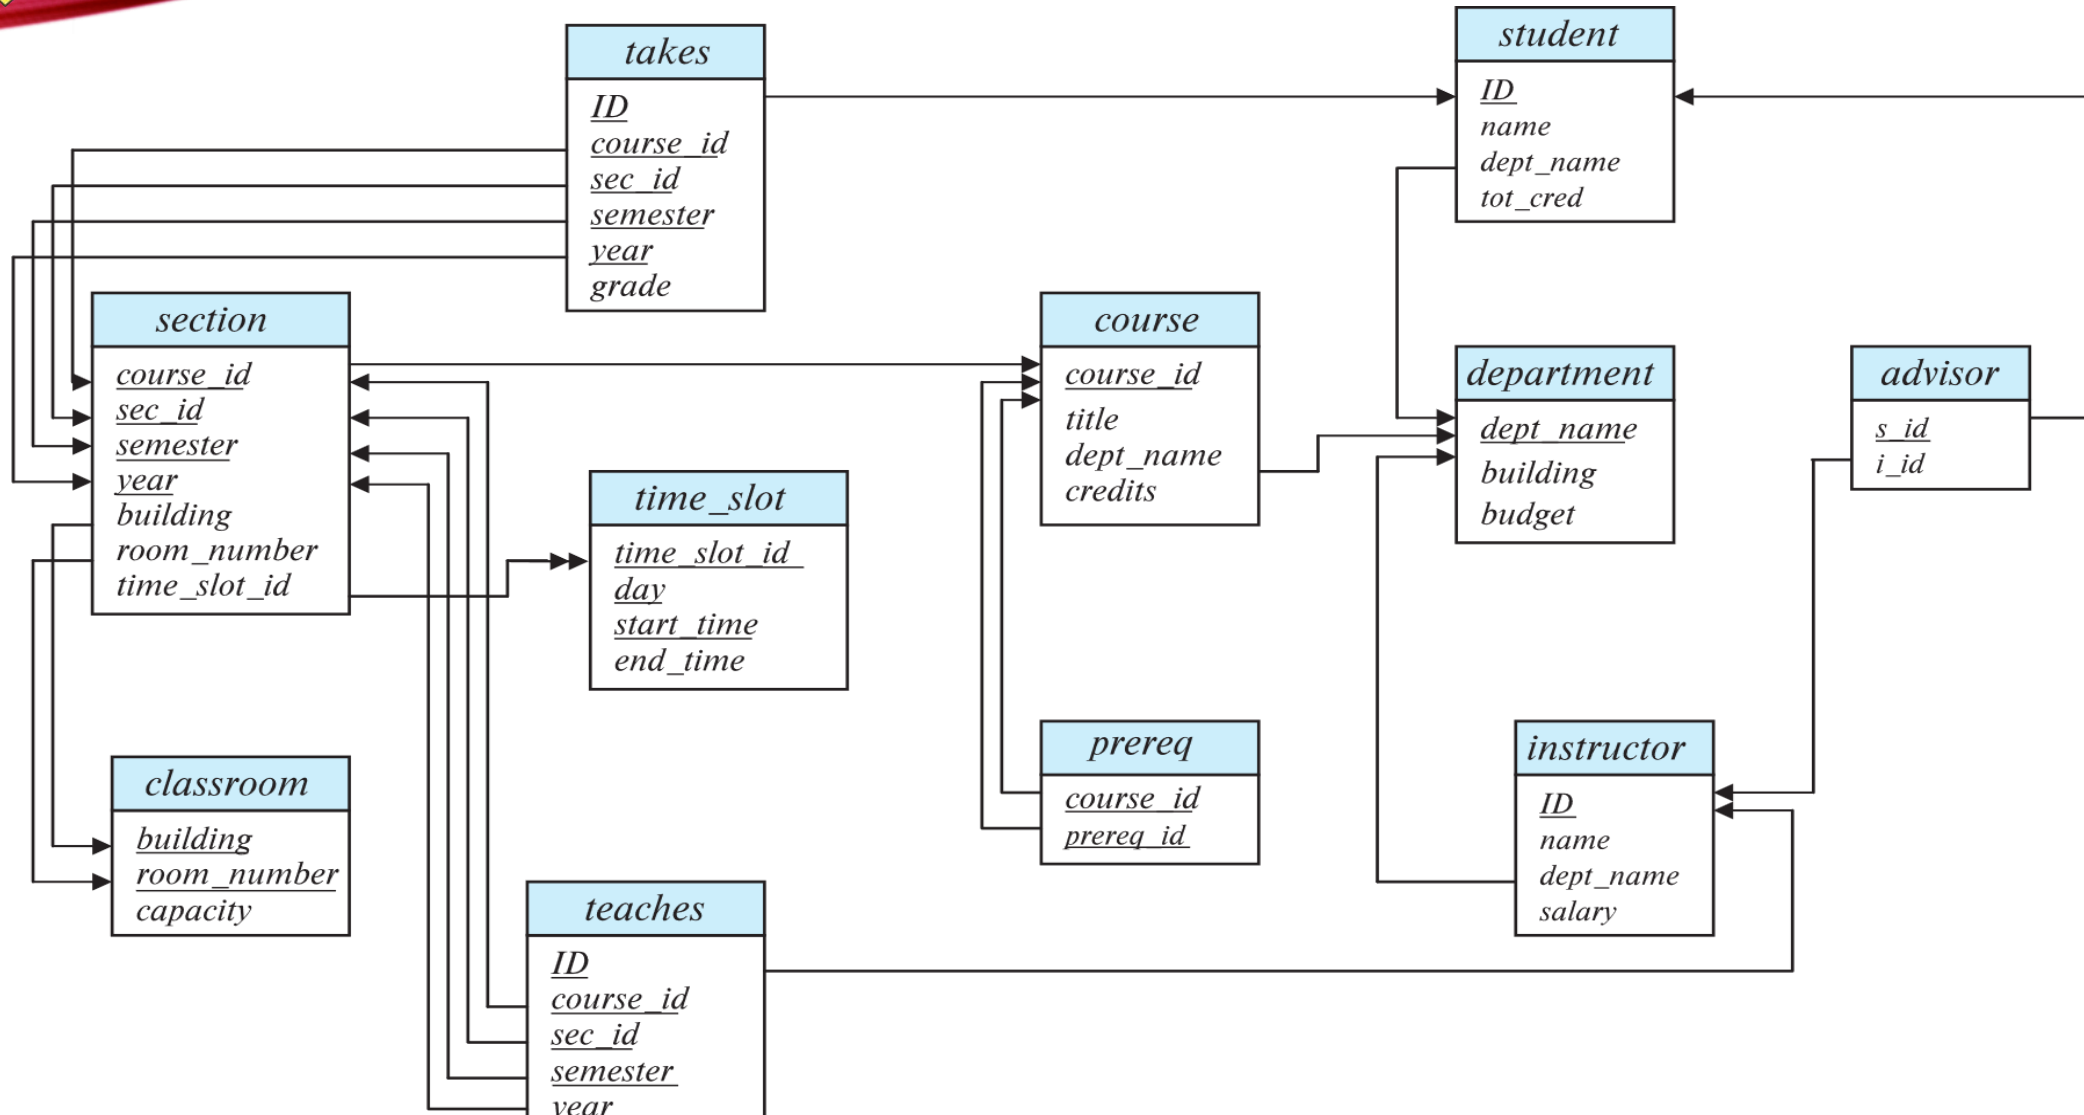



# Relational Query Language

- Procedural versus non-procedural, or declarative
- “Pure” languages:
  - Relational algebra
  - Tuple relational calculus
  - Domain relational calculus

- A procedural language consisting of a set of operations that **take one or two relations** as input and produce a new relation as their result.
- Six basic operators
  - select:  $\sigma$
  - project:  $\Pi$
  - union:  $\cup$
  - set difference:  $-$
  - Cartesian product:  $\times$
  - rename:  $\rho$

# Select Operation

- The **select** operation selects tuples that satisfy a given predicate.
- Notation:  $\sigma_p(r)$
- $p$  is called the **selection predicate**
- Example: select those tuples of the *instructor* relation where the instructor is in the “Physics” department.
  - Query

$$\sigma_{dept\_name="Physics"}(instructor)$$

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
22222	Einstein	Physics	95000
33456	Gold	Physics	87000

<i>ID</i>	<i>name</i>	<i>dept_name</i>	<i>salary</i>
22222	Einstein	Physics	95000
12121	Wu	Finance	90000
32343	El Said	History	60000
45565	Katz	Comp. Sci.	75000
98345	Kim	Elec. Eng.	80000
76766	Crick	Biology	72000
10101	Srinivasan	Comp. Sci.	65000
58583	Califieri	History	62000
83821	Brandt	Comp. Sci.	92000
15151	Mozart	Music	40000
33456	Gold	Physics	87000
76543	Singh	Finance	80000

# Select Operation

- comparisons using

$=, \neq, >, \geq, <, \leq$

in the selection predicate.

- We can combine several predicates into a larger predicate by using the connectives:

$\wedge$  (**and**),  $\vee$  (**or**),  $\neg$  (**not**)

- Example: Find the instructors in Physics with a salary greater \$90,000, we write:

$\sigma_{dept\_name='Physics' \wedge salary > 90,000}$  (*instructor*)

- The select predicate may include comparisons between two attributes.
  - Example, find all departments whose name is the same as their building name:
  - $\sigma_{dept\_name=building}$  (*department*)



# Assessment

- 1. Selects tuples from Tutorials where topic = 'Database'.**
- 2. Selects tuples from Tutorials where the topic is 'Database' and 'author' is guru99.**
- 3. Selects tuples from Customers where sales is greater than 50000**
- 4. Select all the students of department ECE whose fees is greater than equal to 10000 and belongs to Team other than A.**



**sns**  
INSTITUTIONS™

**Thank You!**