


Guess??????





Stack



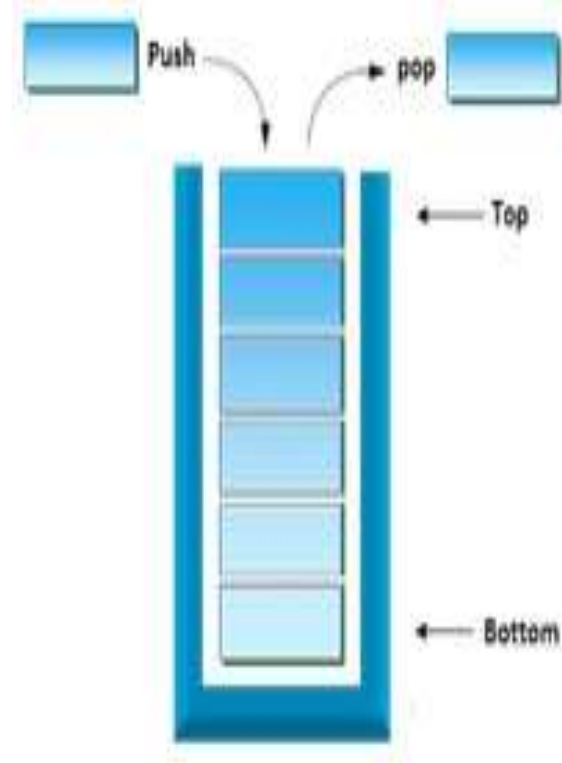

Stack ADT

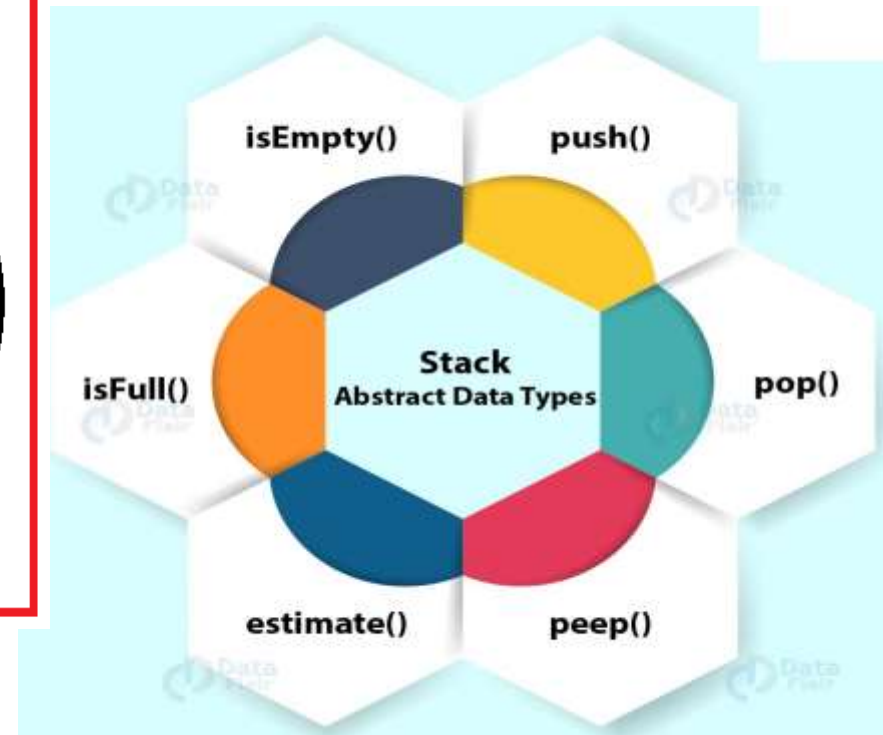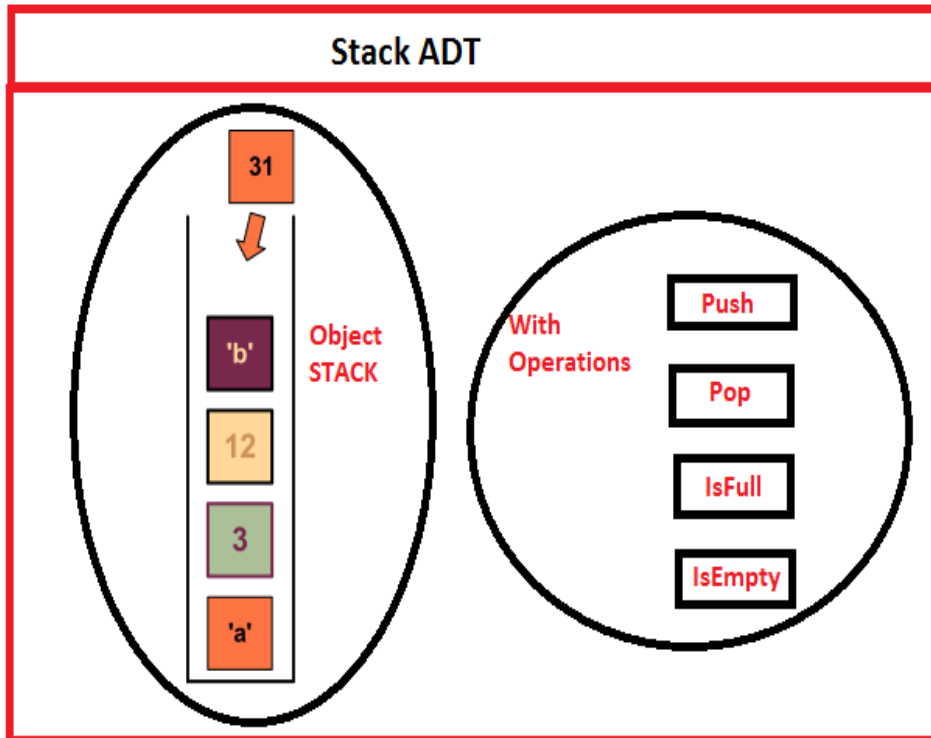



Operation on Stack

- PUSH
- POP
- IsFull
- IsEmpty

Exceptional Conditions

- Overflow
- Underflow

Implementation of Stack Using

- Linked List
- Array




Implementation of Stack Using Linked List



Operations that can be performed on STACK:

- PUSH.
- POP.

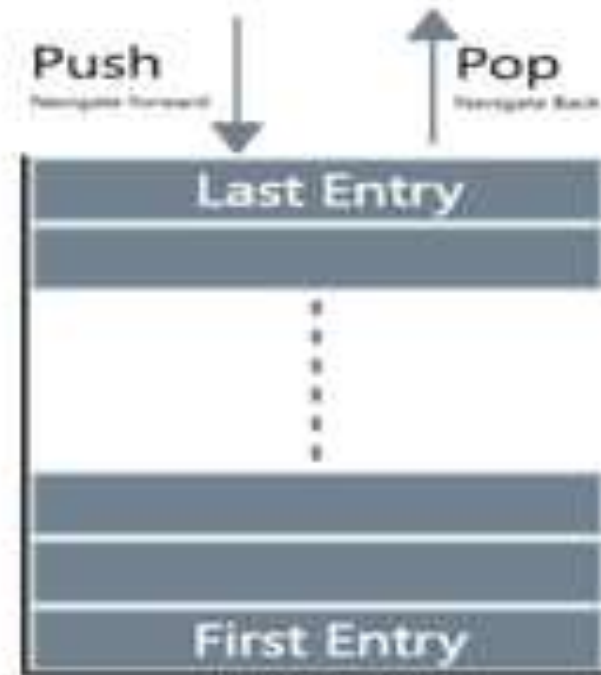



PUSH : It is used to insert items into the stack.

POP: It is used to delete items from stack.

TOP: It represents the current location of data in stack.

