


SNS COLLEGE OF TECHNOLOGY, COIMBATORE -35 (An Autonomous Institution)



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

Socket Programming

- A socket is one endpoint of a two way communication link between two programs running on the network. The socket mechanism provides a means of inter-process communication (IPC) by establishing named contact points between which the communication take place.
- Like 'Pipe' is used to create pipes and sockets is created using 'socket' system call. •
- The socket provides bidirectional FIFO Communication facility over the network. •
- A socket connecting to the network is created at each end of the communication. Each socket has a specific address. This address is composed of an IP address and a port number.
- Socket are generally employed in client server applications.
- The server creates a socket, attaches it to a network port addresses then waits for the • client to contact it.
- The client creates a socket and then attempts to connect to the server socket.
- When the connection is established, transfer of data takes place.

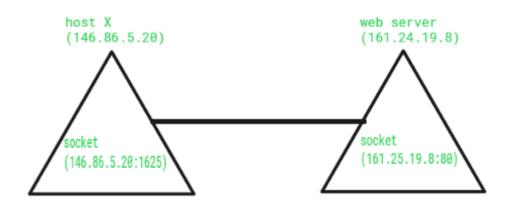

Types

Socket

Sockets

There are two types of Sockets: the **datagram** socket and the **stream** socket.

of

Datagram 1.

This is a type of network which has connection less point for sending and receiving packets. It is similar to mailbox. The letters (data) posted into the box are collected and delivered (transmitted) to a letterbox (receiving socket).

Stream 2.

Computer of interprocess In operating system, stream socket is type a communications socket or network socket which provides a connection-oriented, sequenced, and unique flow of data without record boundaries with well defined mechanisms for creating and destroying connections and for detecting errors. It is similar to phone. A connection is established between the phones (two ends) and a conversation (transfer of data) takes place.

19CSB032 By Ms.S.Vasuki AP/CSE

Socket


•



SNS COLLEGE OF TECHNOLOGY, COIMBATORE –35 (An Autonomous Institution)



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

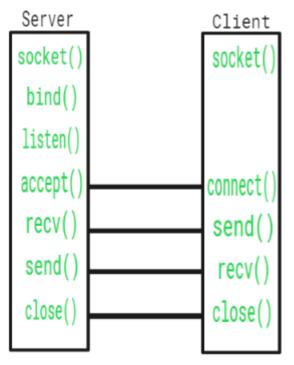

Function Call	Description
Create()	To create a socket
Bind()	It's a socket identification like a telephone number to contact
Listen()	Ready to receive a connection
Connect()	Ready to act as a sender
Accept()	Confirmation, it is like accepting to receive a call from a sender
Write()	To send data
Read()	To receive data
Close()	To close a connection