



SNS COLLEGE OF TECHNOLOGY

Coimbatore-35
An Autonomous Institution



Accredited by NBA – AICTE and Accredited by NAAC – UGC with 'A++' Grade
Approved by AICTE, New Delhi & Affiliated to Anna University, Chennai

DEPARTMENT OF ELECTRONICS & COMMUNICATION ENGINEERING

19ECT312 – EMBEDDED SYSTEM DESIGN

III YEAR/ VI SEMESTER
1

UNIT 4 : EMBEDDED OPERATING SYSTEM AND MODELING

TOPIC 4.1: EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT




EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



What is process management in embedded system?

Process Management:

How the OS manages and views other software in the embedded system (Multitasking and Process Management). A sub function typically found within process management is interrupt and error detection management

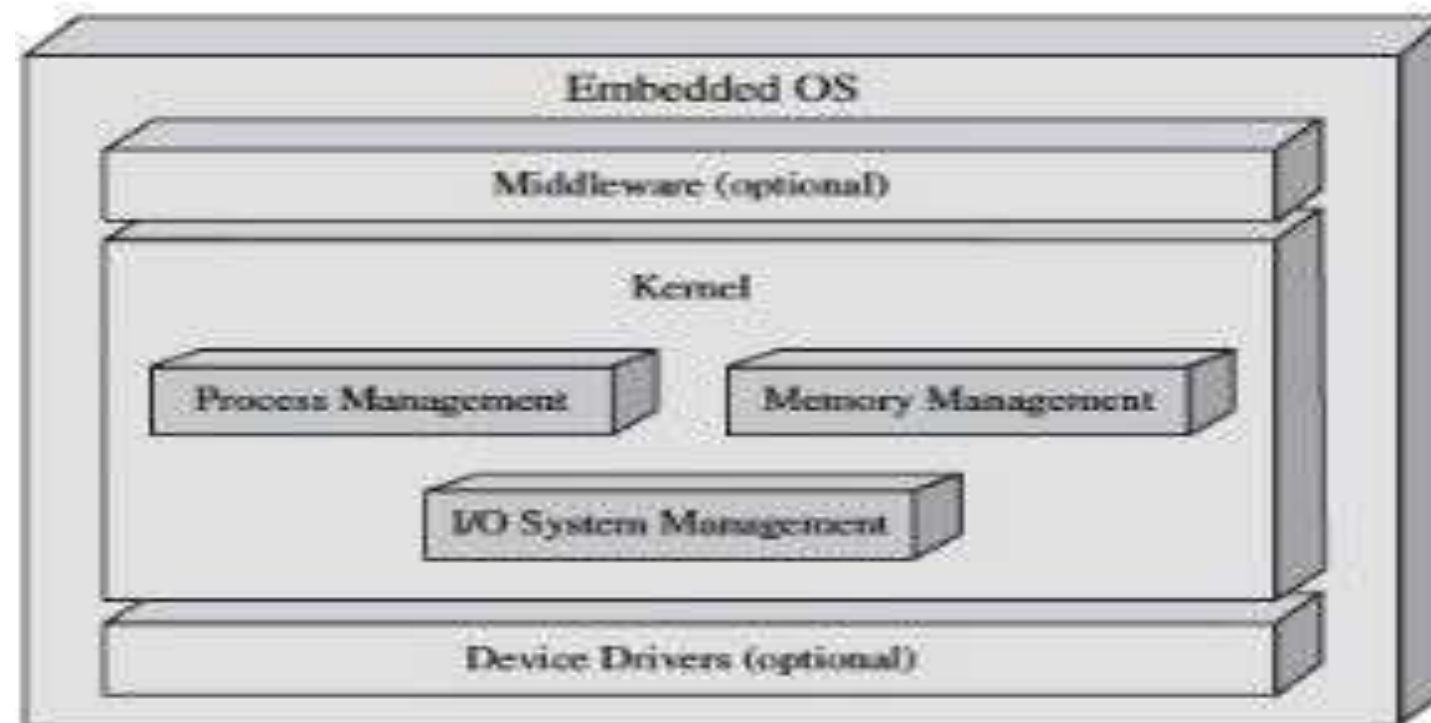



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



What is an Operating System?

A program that acts as an intermediary between a user of a computer and the computer hardware

Operating system goals:

- Execute user programs and make solving user problems easier
- Make the computer system convenient to use
- Use the computer hardware in an efficient manner

Process Management in OS

A Program does nothing unless its instructions are executed by a CPU.

A program in execution is called a process. In order to accomplish its task, process needs the computer resources. There may exist more than one process in the system which may require the same resource at the same time.



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Why do we need process management in operating system?

Process Management

The operating systems **allocate resources that allow the process to exchange information.**

It synchronizes among processes and safeguards the resources of other processes. The operating system manages the running processes in the system and performs tasks like scheduling and resource allocation.


What are the types of process in OS?

Basically there are two types of process:

1. Independent process.
2. Cooperating process.



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT

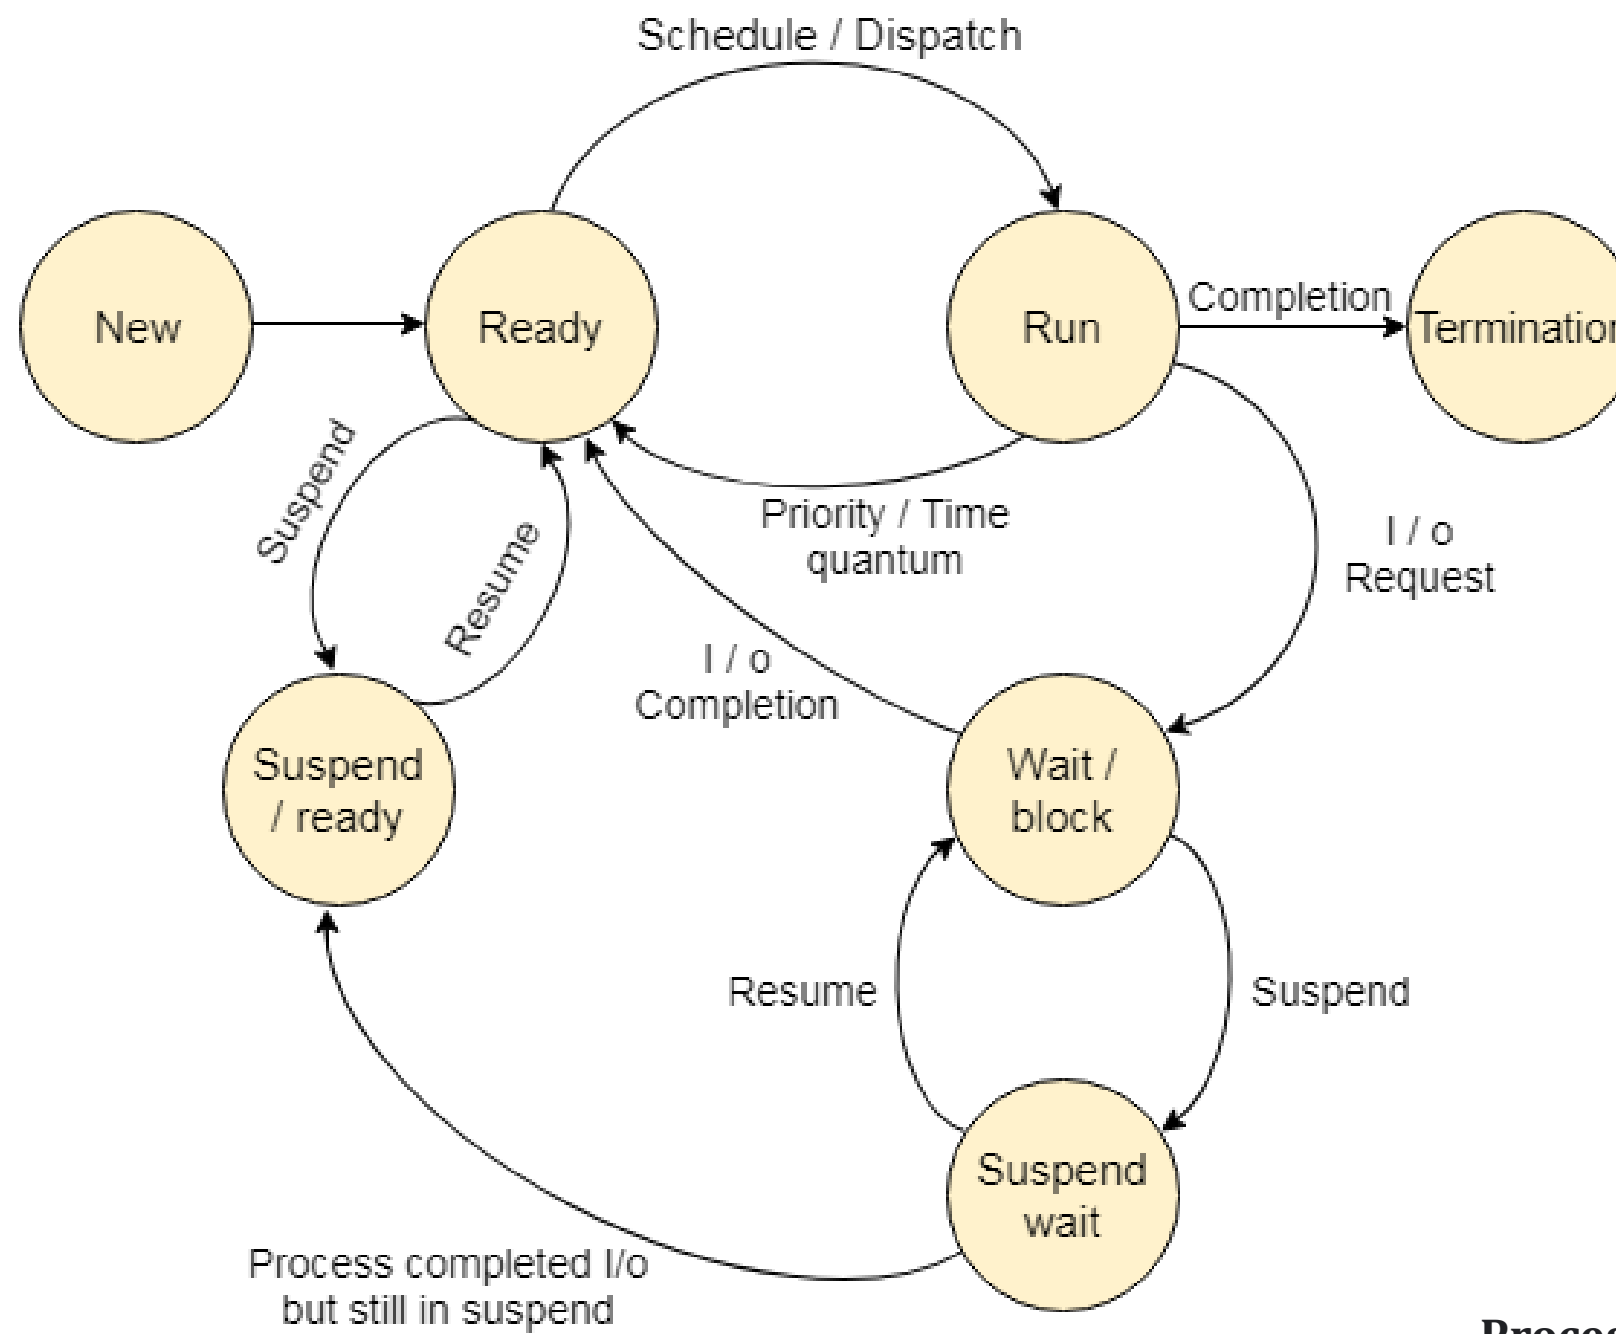

Process States



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



What are the different states of process in OS?

Process States

- New. A program which is going to be picked up by the OS into the main memory is called a new process.
- Ready. Whenever a process is created, it directly enters in the ready state, in which, it waits for the CPU to be assigned. ...
- Running. ...
- Block or wait. ...
- Completion or termination. ...
- Suspend ready. ...
- Suspend wait.



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



key elements of a process?

- (1) Process Definition,**
- (2) Process and Activity Roles,**
- (3) Available Tools and**
- (4) Training.**

Plain and simple reality- these elements are inseparably linked.


The absence of one element will hugely affect the result of the process initiative.



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Four Components of a Computer System

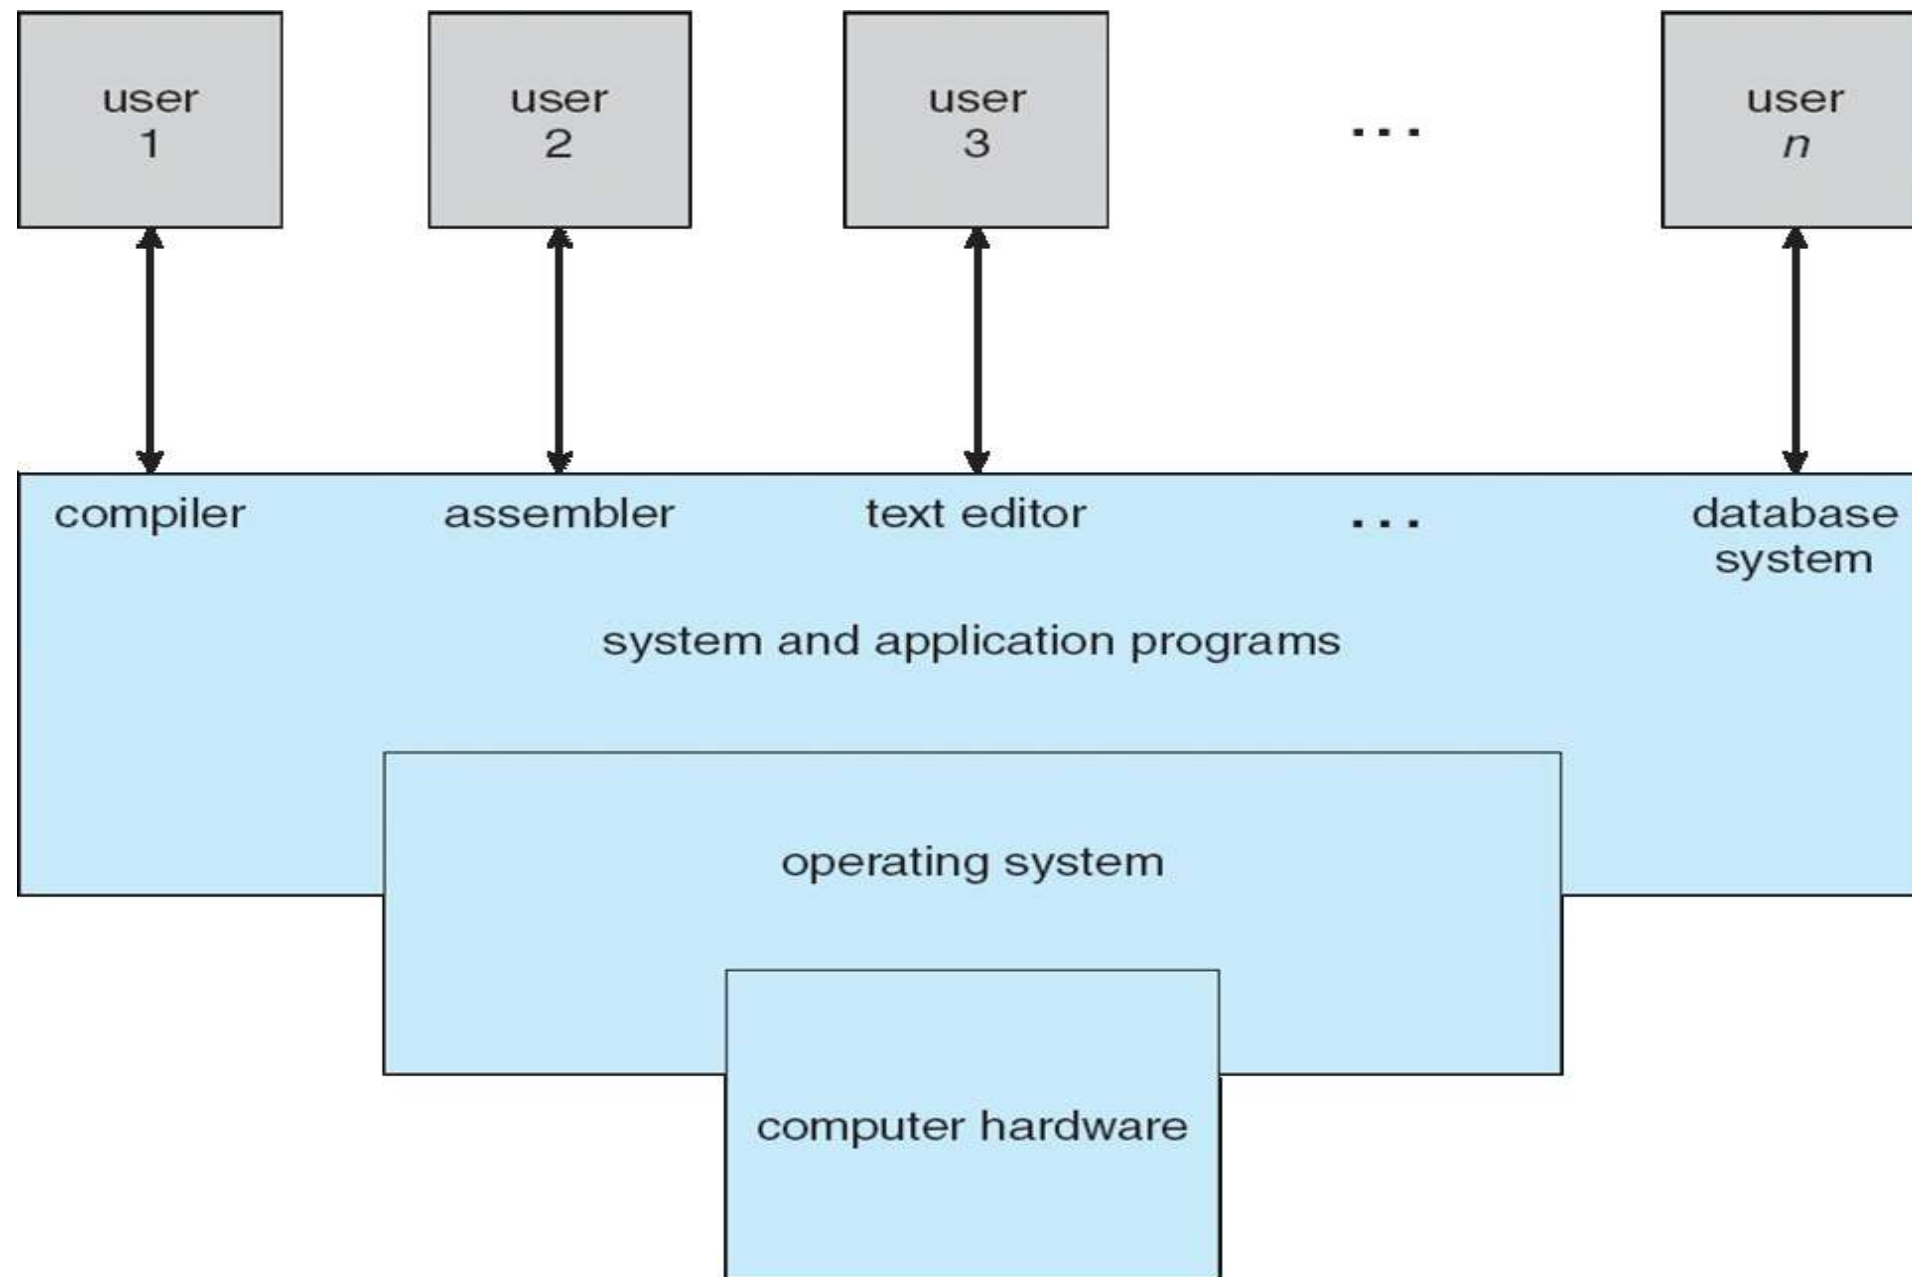



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Process Management

- A process is a program in execution. It is a unit of work within the system. Program is a **passive entity** (a static collection of instructions that define a sequence of operations to be performed) process is an **active entity** (A process is an active entity, representing an instance of a program in execution)
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaim of any reusable resources
- Single-threaded process (only one flow of control exists) has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- Multi-threaded (the same functions and the same resources may be accessed concurrently by several flows of control) process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Process Management Activities

The operating system is responsible for the following activities in connection with process management:

- Creating and deleting both user and system processes
- Suspending and resuming processes
- Providing mechanisms for process synchronization
- Providing mechanisms for process communication
- Providing mechanisms for deadlock handling



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Inter Process Communication (IPC)

- Inter-Process Communication (IPC) is a cornerstone of modern operating systems, allowing processes to collaborate, share data, and synchronize their activities
- The choice of IPC method depends on the specific requirements of the processes and the environment in which they operate



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Inter Process Communication (IPC)

A process can be of two types

1. Independent process
2. Co-operating process

- An independent process is not affected by the execution of other processes while a co-operating process can be affected by other executing processes
- Inter-process communication (IPC) is a mechanism that allows processes to communicate with each other and synchronize their actions

The communication between these processes can be seen as a method of co-operation between them. Processes can communicate with each other through Shared Memory and Message passing



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Inter Process Communication (IPC)

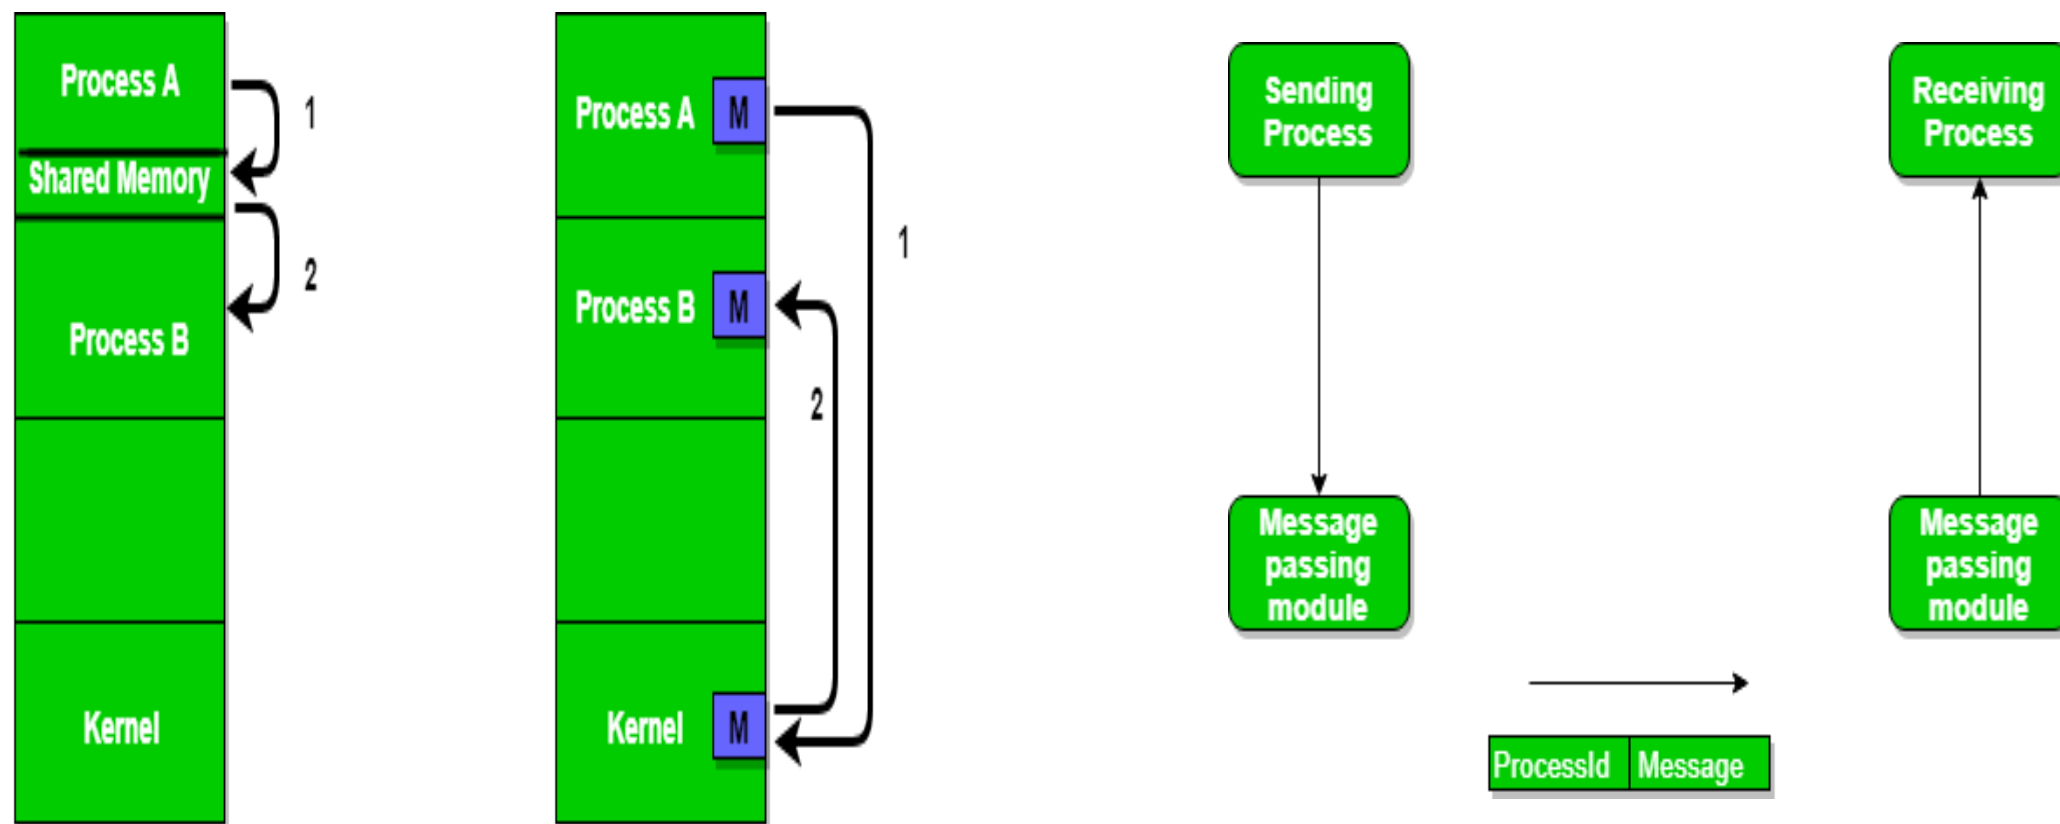


Figure 1 - Shared Memory and Message Passing



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Memory Management

- To execute a program all (or part) of the instructions must be in memory
- All (or part) of the data that is needed by the program must be in memory.
- Memory management determines what is in memory and when
 - Optimizing CPU utilization and computer response to users
- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and de allocating memory space as needed



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Storage Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - **file**
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)
- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - Creating and deleting files and directories
 - Primitives to manipulate files and directories
 - Mapping files onto secondary storage
 - Backup files onto stable (non-volatile) storage media



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Mass-Storage Management

- Usually disks used to store data that does not fit in main memory or data that must be kept for a “long” period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Free-space management
 - Storage allocation
 - Disk scheduling
- Some storage need not be fast
 - Tertiary storage includes optical storage, magnetic tape
 - Still must be managed – by OS or applications
 - Varies between WORM (write-once, read-many-times) and RW (read-write)



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Performance of Various Levels of Storage

Level	1	2	3	4	5
Name	registers	cache	main memory	solid state disk	magnetic disk
Typical size	< 1 KB	< 16MB	< 64GB	< 1 TB	< 10 TB
Implementation technology	custom memory with multiple ports CMOS	on-chip or off-chip CMOS SRAM	CMOS SRAM	flash memory	magnetic disk
Access time (ns)	0.25 - 0.5	0.5 - 25	80 - 250	25,000 - 50,000	5,000,000
Bandwidth (MB/sec)	20,000 - 100,000	5,000 - 10,000	1,000 - 5,000	500	20 - 150
Managed by	compiler	hardware	operating system	operating system	operating system
Backed by	cache	main memory	disk	disk	disk or tape

Movement between levels of storage hierarchy can be explicit or implicit




EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



A Dual-Core Design

- Multi-chip and **multicore**
- Systems containing all chips
 - Chassis containing multiple separate systems

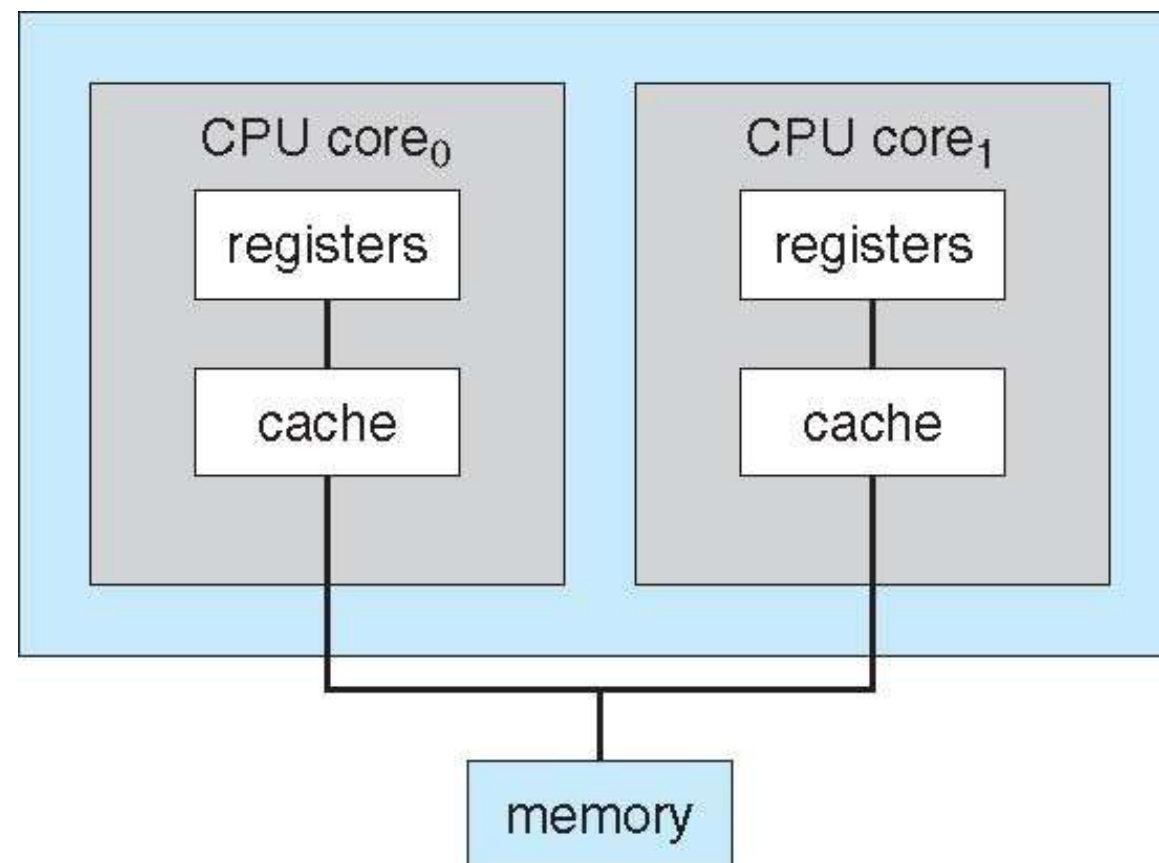



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT




Clustered Systems

- Like multiprocessor systems, but multiple systems working together
 - Usually sharing storage via a **storage-area network (SAN)**
 - Provides a **high-availability** service which survives failures
 - **Asymmetric clustering** has one machine in hot-standby mode
 - **Symmetric clustering** has multiple nodes running applications, monitoring each other
 - Some clusters are for **high-performance computing (HPC)**
 - Applications must be written to use **parallelization**
 - Some have **distributed lock manager (DLM)** to avoid conflicting operations



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT

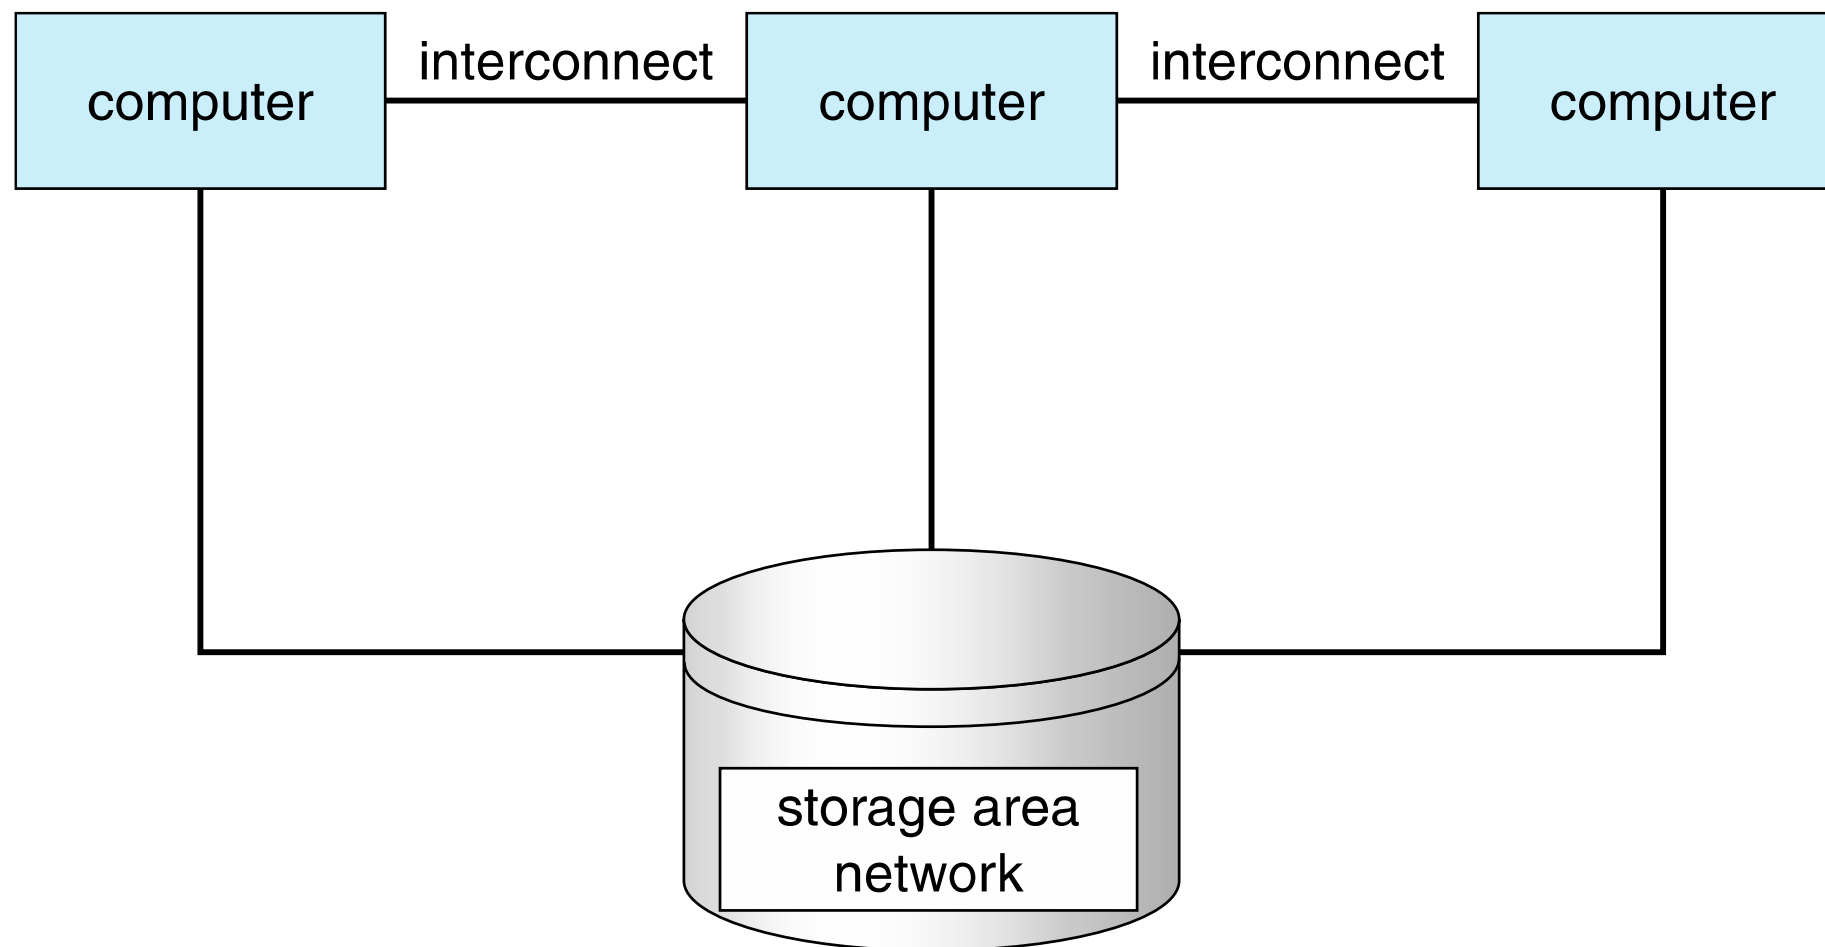

Clustered Systems



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Operating System Structure


- **Multiprogramming (Batch system)** needed for efficiency
 - Single user cannot keep CPU and I/O devices busy at all times
 - Multiprogramming organizes jobs (code and data) so CPU always has one to execute
 - A subset of total jobs in system is kept in memory
 - One job selected and run via **job scheduling**
 - When it has to wait (for I/O for example), OS switches to another job
- **Timesharing (multitasking)** is logical extension in which CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
 - **Response time** should be < 1 second
 - Each user has at least one program executing in memory \Rightarrow **process**
 - If several jobs ready to run at the same time \Rightarrow **CPU scheduling**
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Memory Layout for Multiprogrammed System

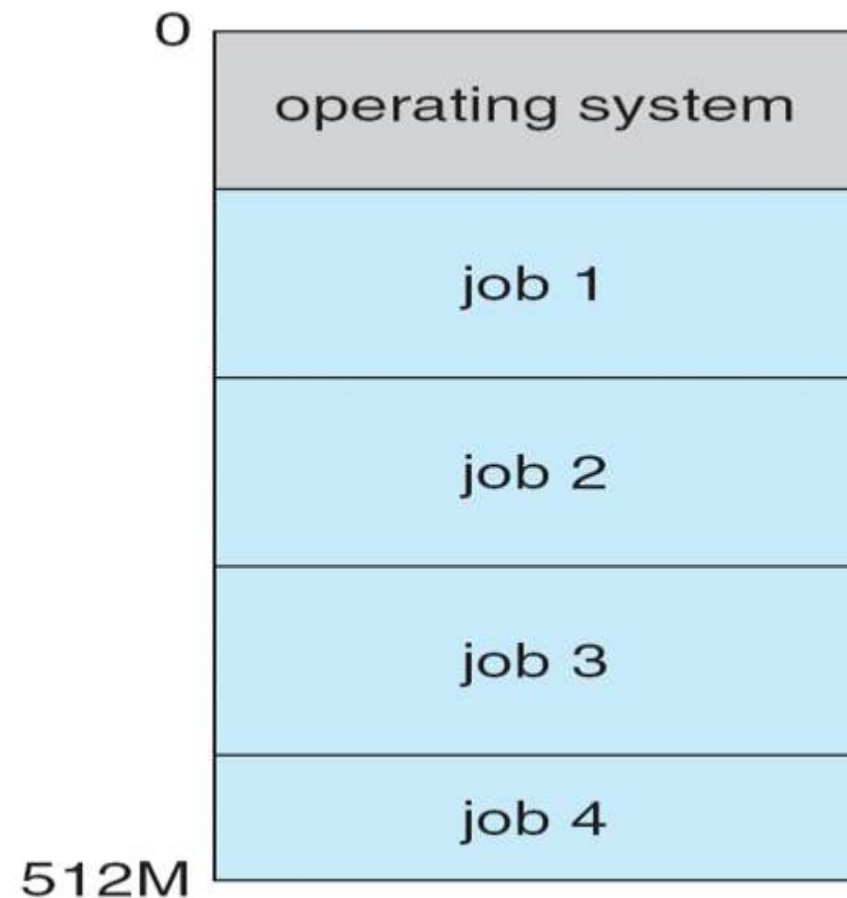

Operating-System Operations

Interrupt driven (hardware and software)

Hardware interrupt by one of the devices

Software interrupt (exception** or **trap**):**

- Software error (e.g., division by zero)
- Request for operating system service
- Other process problems include infinite loop, processes modifying each other or the operating system




EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Migration of data "A" from Disk to Register

- Multitasking environments must be careful to use most recent value, no matter where it is stored in the storage hierarchy

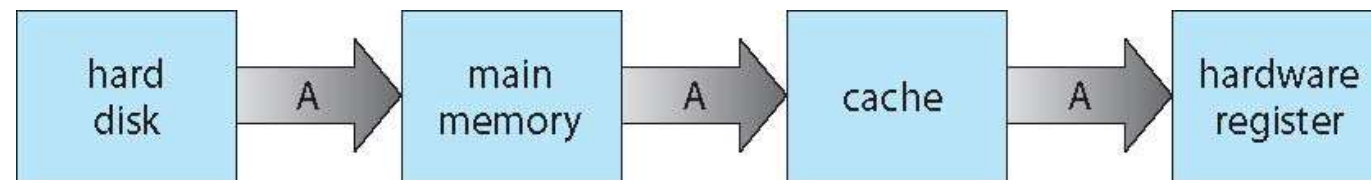

- Multiprocessor environment must provide **cache coherency** in hardware such that all CPUs have the most recent value in their cache
- Distributed environment situation even more complex
 - Several copies of a datum can exist



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



I/O Subsystem

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
 - General device-driver interface
 - Drivers for specific hardware devices



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Protection and Security

- **Protection** – any mechanism for controlling access of processes or users to resources defined by the OS
- **Security** – defense of the system against internal and external attacks
 - Huge range, including denial-of-service, worms, viruses, identity theft, theft of service
- Systems generally first distinguish among users, to determine who can do what
 - User identities (**user IDs**, security IDs) include name and associated number, one per user
 - User ID then associated with all files, processes of that user to determine access control
 - Group identifier (**group ID**) allows set of users to be defined and controls managed, then also associated with each process, file
 - **Privilege escalation** allows user to change to effective ID with more rights



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Computing Environments - Traditional

- Stand-alone general purpose machines
- But blurred as most systems interconnect with others (i.e., the Internet)
- **Portals** provide web access to internal systems
- **Network computers (thin clients)** are like Web terminals
- Mobile computers interconnect via **wireless networks**
- Networking becoming ubiquitous – even home systems use **firewalls** to protect home computers from Internet attacks



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Computing Environments - Mobile

- Handheld smartphones, tablets, etc
- What is the functional difference between them and a “traditional” laptop?
- Extra feature – more OS features (GPS, gyroscope)
- Allows new types of apps like *augmented reality*
- Use IEEE 802.11 wireless, or cellular data networks for connectivity
- Leaders are **Apple iOS** and **Google Android**



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Computing Environments – Real-Time Embedded Systems

- Real-time embedded systems most prevalent form of computers
 - Vary considerable, special purpose, limited purpose OS, **real-time OS**
 - Use expanding
- Many other special computing environments as well
 - Some have OSES, some perform tasks without an OS
- Real-time OS has well-defined fixed time constraints
 - Processing **must** be done within constraint
 - Correct operation only if constraints met



EMBEDDED OPERATING SYSTEM PROCESS MANAGEMENT



Open-Source Operating Systems

- Operating systems made available in source-code format rather than just binary **closed-source**
- Counter to the **copy protection** and **Digital Rights Management (DRM)** movement
- Started by **Free Software Foundation (FSF)**, which has “copyleft” **GNU Public License (GPL)**
- Examples include **GNU/Linux** and **BSD UNIX** (including core of **Mac OS X**), and many more
- Can use VMM like VMware Player (Free on Windows), Virtualbox (open source and free on many platforms - <http://www.virtualbox.com>)
 - Use to run guest operating systems for exploration